Development of an EMAT ILI System For Detection, Discrimination, and Grading Stress Corrosion Cracking (SCC) In Pipelines

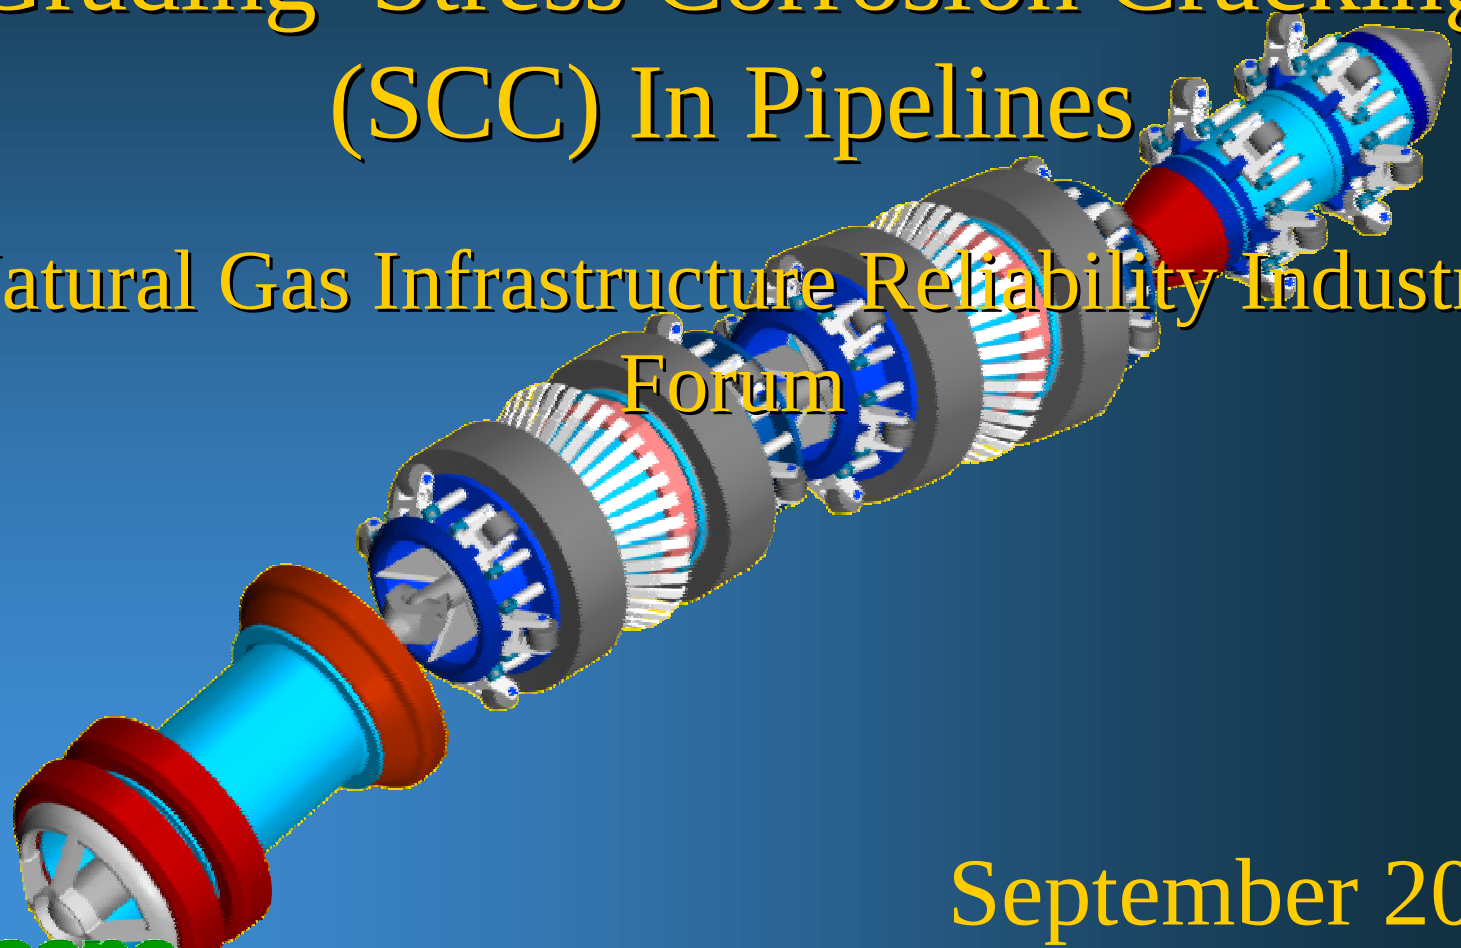

Natural Gas Infrastructure Reliability Industry Forum

September 2002

Tuboscope
A Varco Company

Development of an EMAT ILI System For SCC In Pipelines

Supported by: DOE NETL

Award: DE-FC26-01NT41154

To: Tuboscope Pipeline Services

Project Director: Jeffrey Aron

DOE Project Officer: Daniel Driscoll

DOE NETL Administration: Crystal Sharp & Kelly McDonald

Tuboscope
A Varco Company

© 2001 Tuboscope

Summary

→ SCC Review

→ EMAT and Approach Review

→Lab Setup

→Lab Results

→Summary and Future Work

Tuboscope
A Varco Company

© 2001 Tuboscope

DOE EMAT Project Goals

→Prototype ILI system to detect and grade Stress Corrosion Cracking (SCC) In Gas Pipelines

Tuboscope
A Varco Company

© 2001 Tuboscope

What's the problem ?

Difficulties Posed By SCC

→Axially oriented

→Narrow (sometimes less open than .01")

→Can occur in families of short cracks

→Can be filled with corrosion materials

→On outside of the pipe

Tuboscope
A Varco Company

© 2001 Tuboscope

What's the problem ??

Difficulties Posed By Gas

→No contact gives poor to no acoustic coupling

Difficulties in the pipe

→Wear

→Must discriminate among other kinds of defects

→Voluminous data

Tuboscope
A Varco Company

© 2001 Tuboscope

SCC Example 1

Axial and Narrow SCC

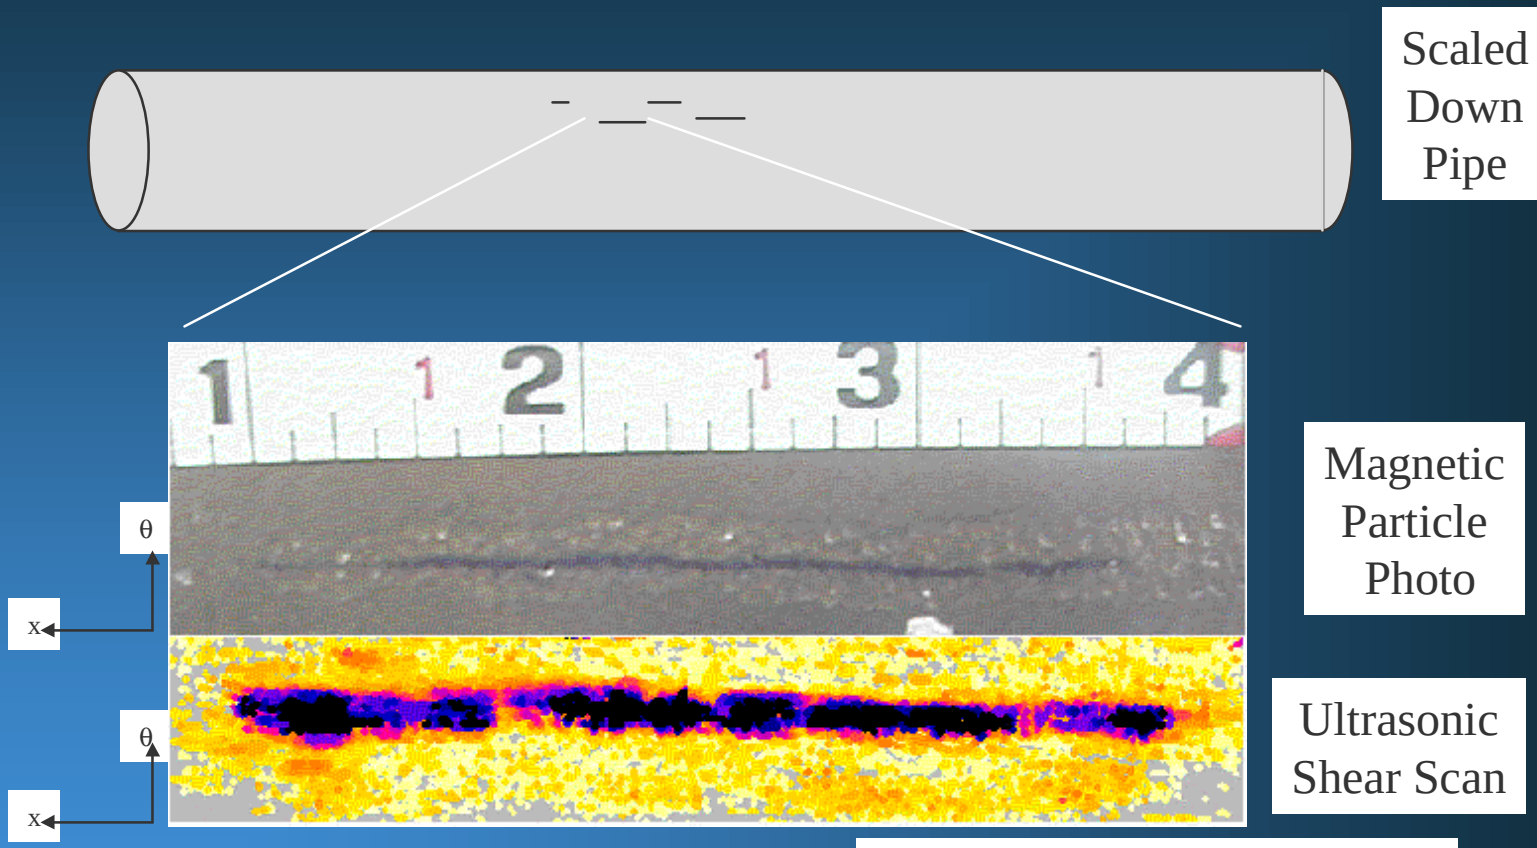

Scaled Down Pipe

Magnetic Particle Photo

Ultrasonic Shear Scan

Darker = higher reflection coeff.

Tuboscope
A Varco Company

© 2001 Tuboscope

SCC Example 2

Axial SCC Families

Tuboscope
A Varco Company

© 2001 Tuboscope

Approach

Excite acoustic guided waves (nearly trapped modes)

Measure their transmission and reflection amplitudes

Excite and receive with EMATs

Use different waves (modes), of which the

Energy concentration of each mode differs through the wall

To enable defect grading & discrimination

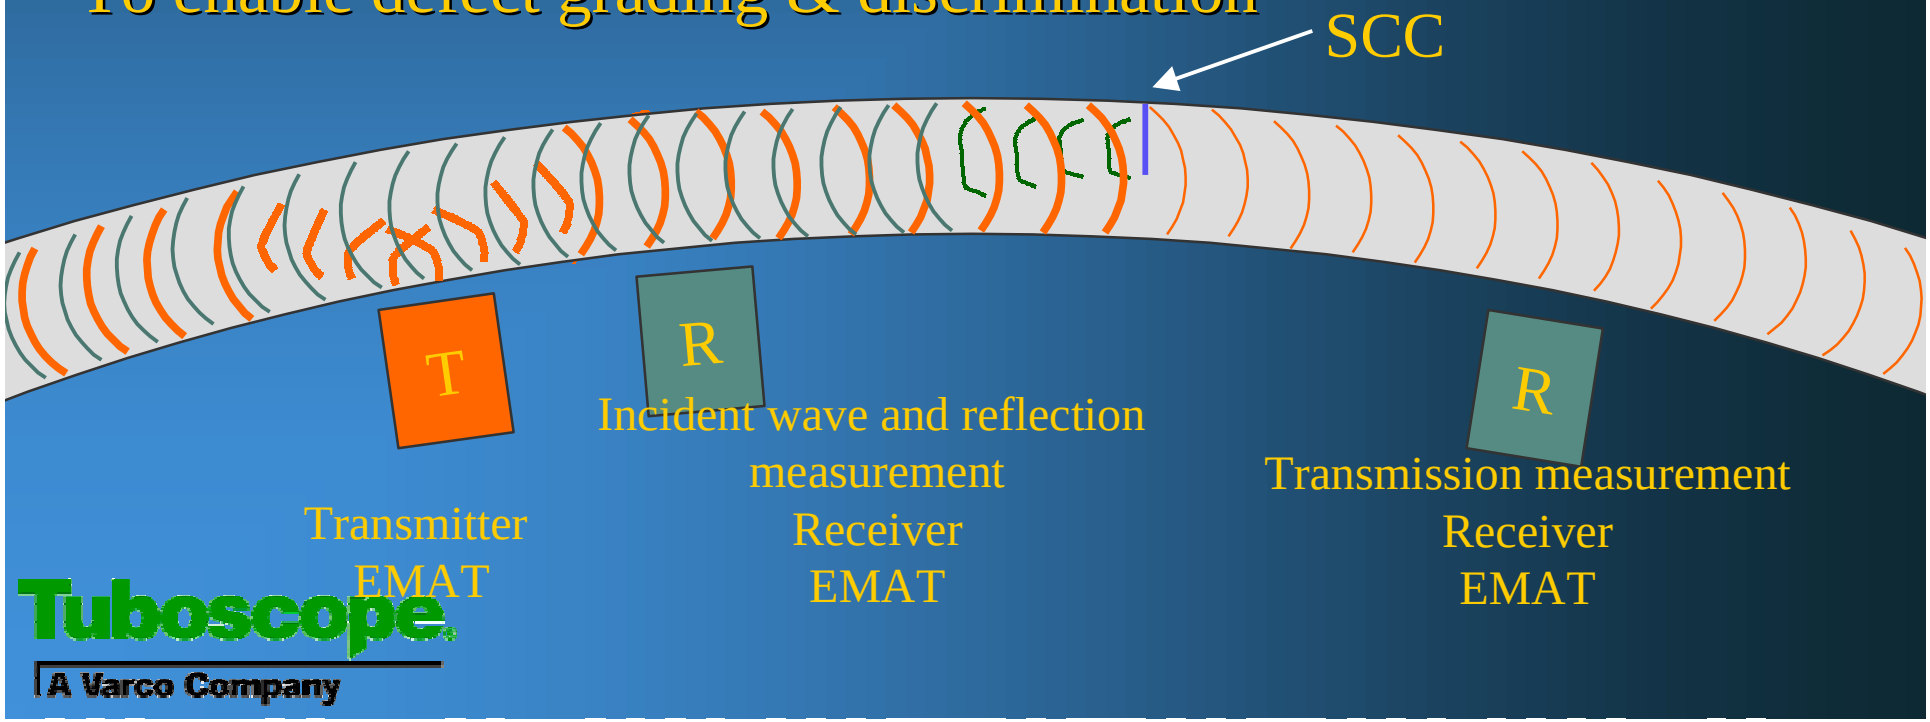

Tuboscope
A Varco Company

Two Kinds of Generic Modes: SH and SV Vibration Waves

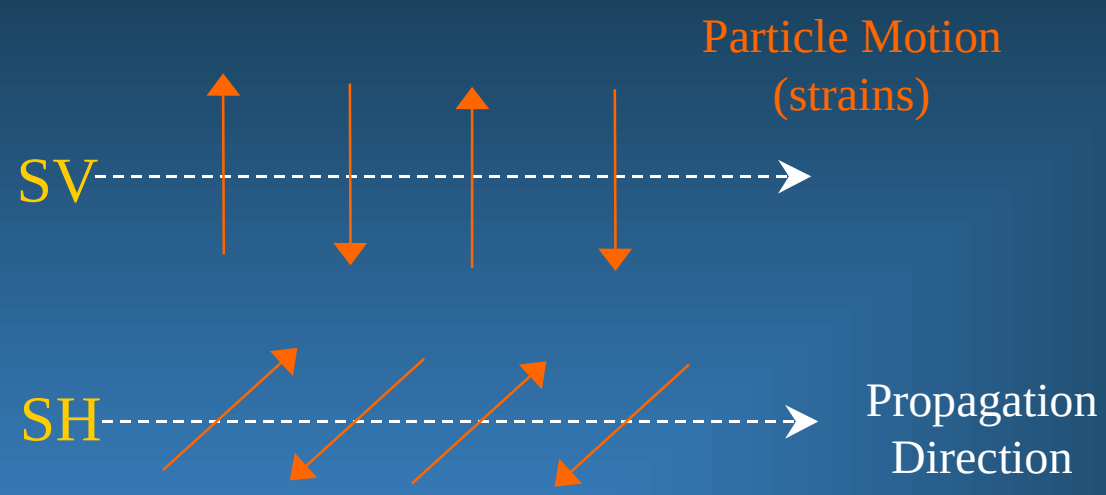



→Both have strong crack interactions

→SH Advantages (in theory)

- → Less attenuation due to in plane motion)
- → Simple crack interactions; less conversion to other modes
- → No or less dispersions

Tuboscope
A Varco Company

© 2001 Tuboscope

EMAT :
Electro-Magnetic AcousticTransducer

- →Launches ultrasonic waves in metal
- →Doesn't need contact or fluid coupling but should be close to the conducting surface
- →Good for detecting/evaluating defects
  - Can launch shear waves
  - Easy to obtain circumferential directivity
- →A difficult technology, unlike piezo
  - Due to:
    - Low efficiency
    - High power requirements

Tuboscope
A Varco Company

© 2001 Tuboscope

ElectroMagnetic Acoustic Transducer (EMAT)

- EMAT requires
  - Static magnetic bias field
  - Coupling coil driven by
  - AC (moderate freqs.) coil power for AC magnetic field
  - Material excited msut be electrically conducting

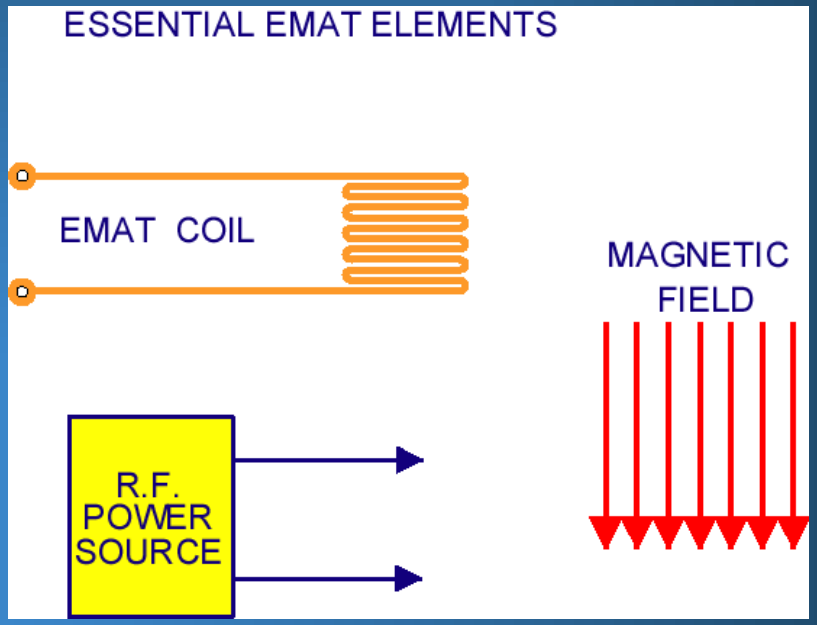

Tuboscope
A Varco Company

© 2001 Tuboscope

Two Kinds of EMAT Physics

Lorentz

(as in loudspeakers)

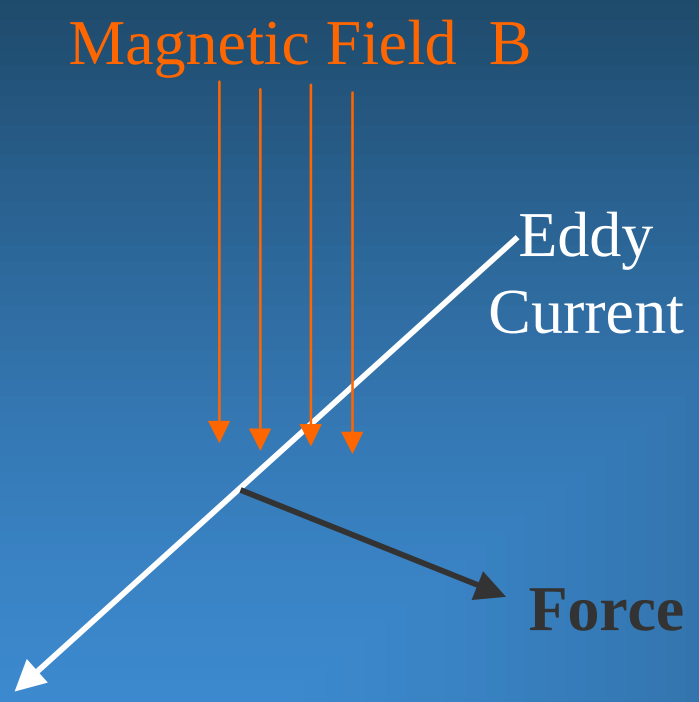

Magnetostriction

(as in early sonars or transformer noise)

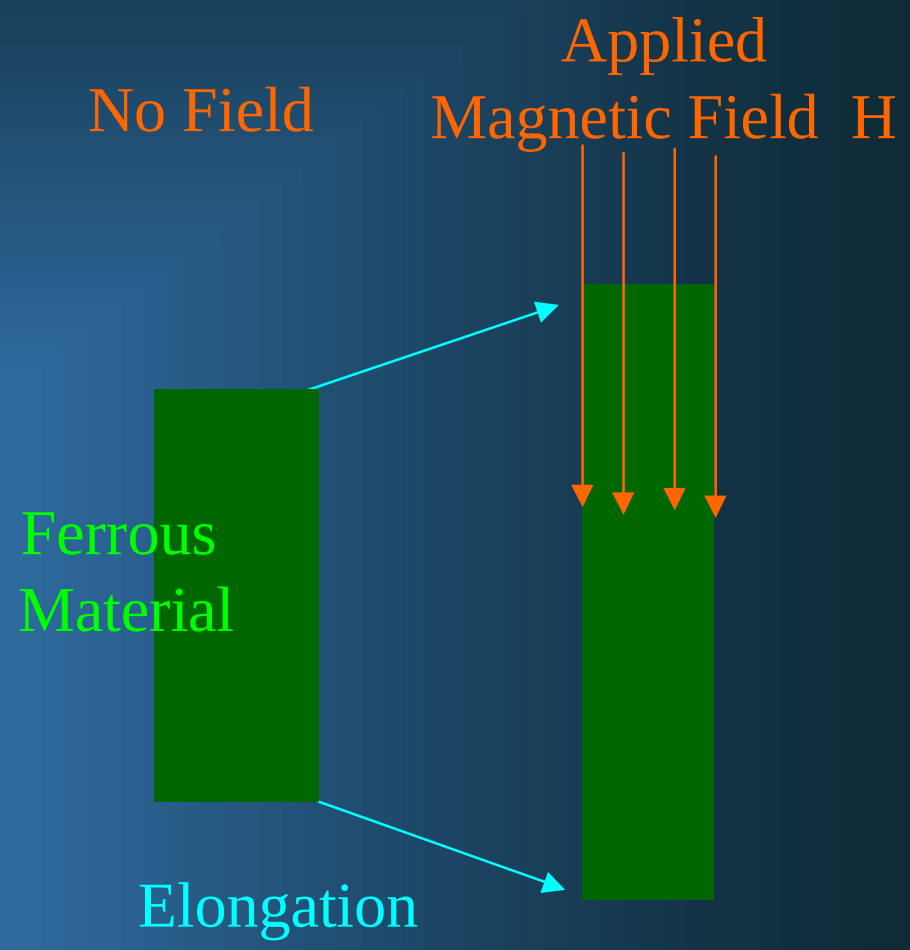

Tuboscope
A Varco Company

© 2001 Tuboscope

Lorentz EMAT

Field Perpendicular to Pipe

LORENTZ: (F=J X B)

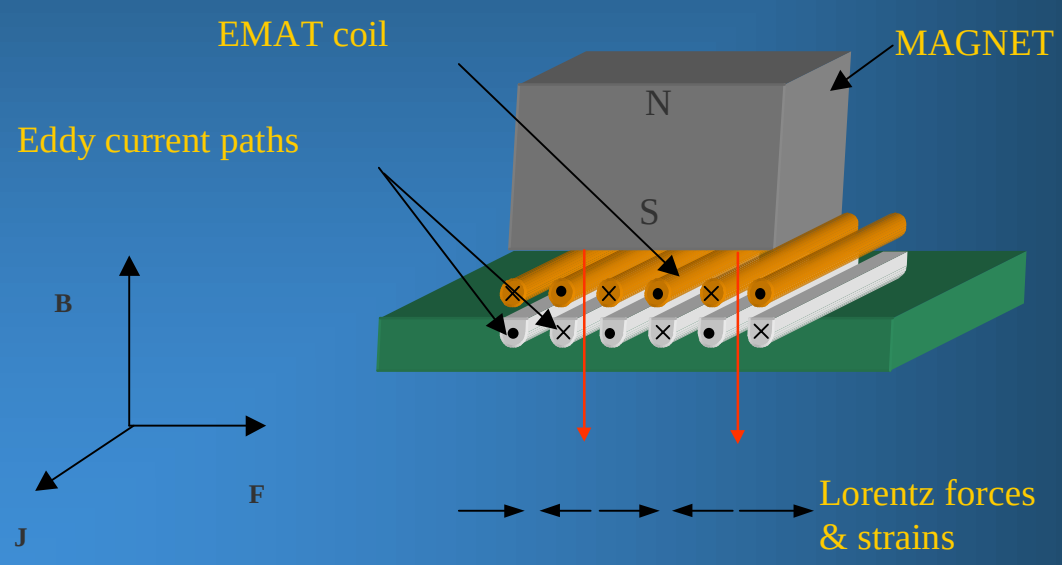

Tuboscope
A Varco Company

© 2001 Tuboscope

Magnetostrictive EMAT

Field Axial or Circumferential in Pipe Plane

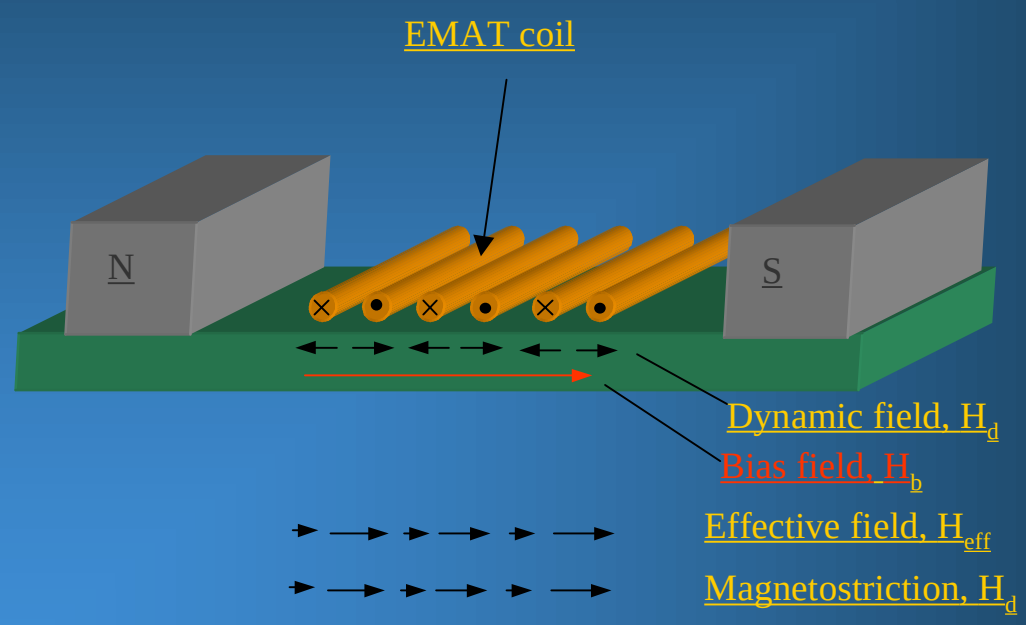

Tuboscope
A Varco Company

© 2001 Tuboscope

EMAT Challenges

- Choice of Lorentz or Magnetostrictive
- Choice of wave modes to probe with
  - Frequency and transducer parameters
  - Good SNR and crack sensitivity for pipes
  - Attenuations & dispersion (from coatings)
- Practical aspects for pigs
  - Sensitivity to standoff and materials
  - Wear & reliability
  - Peak power requirements
  - Speed effects

Tuboscope
A Varco Company

© 2001 Tuboscope

DOE EMAT Project Goals

- Phase 1
  - Optimize & practicalize EMAT sensor/measurement with lab work
  - Mouse and Mule pull tests & related systems development
- Phase 2
  - Prototype ILI system for SCC
  - Test/ evaluate in a customer line

Tuboscope
A Varco Company

© 2001 Tuboscope

DOE Lab System

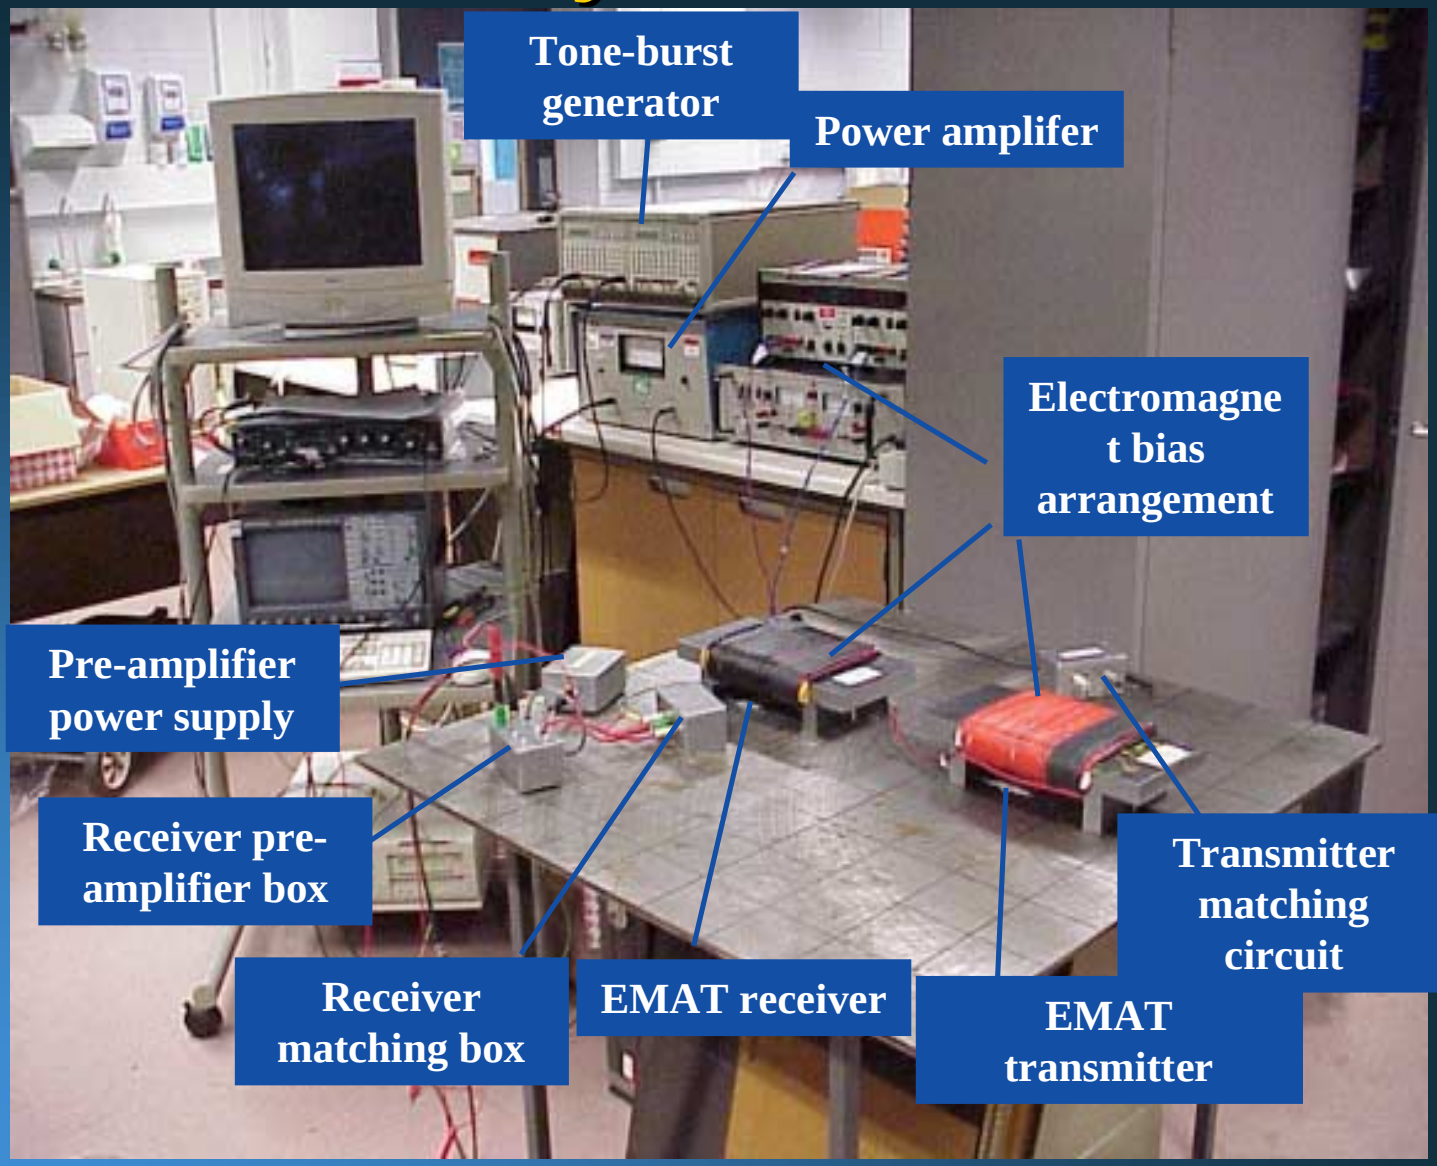

Tuboscope
A Varco Company

© 2001 Tuboscope

Lab Systems Improvements

- Conformable, more efficient coils (in house)
- Efficient, low noise coupling and amplification
- SNRs: SV1=80 SH0=20
- Magnetic biasing and instrumentation now provide flexibility for investigations

Conformable EMAT Coils

Tuboscope
A Varco Company

© 2001 Tuboscope

Lab Work

- →Basic transducer parameters & sensitivity,
  - →SNR, Insertion Loss, Liftoff sensitivity, Beamwidth
- →Man-made crack interactions
  - →Transmission and reflection
- →SCC interactions

Tuboscope
A Varco Company

© 2001 Tuboscope

EMAT Lab Geometry

(PlanarTesting)

- → Transmit and receive EMATs
- → Transducer sensitivity evaluations
- → Crack reflections and transmission
- → Side reflections

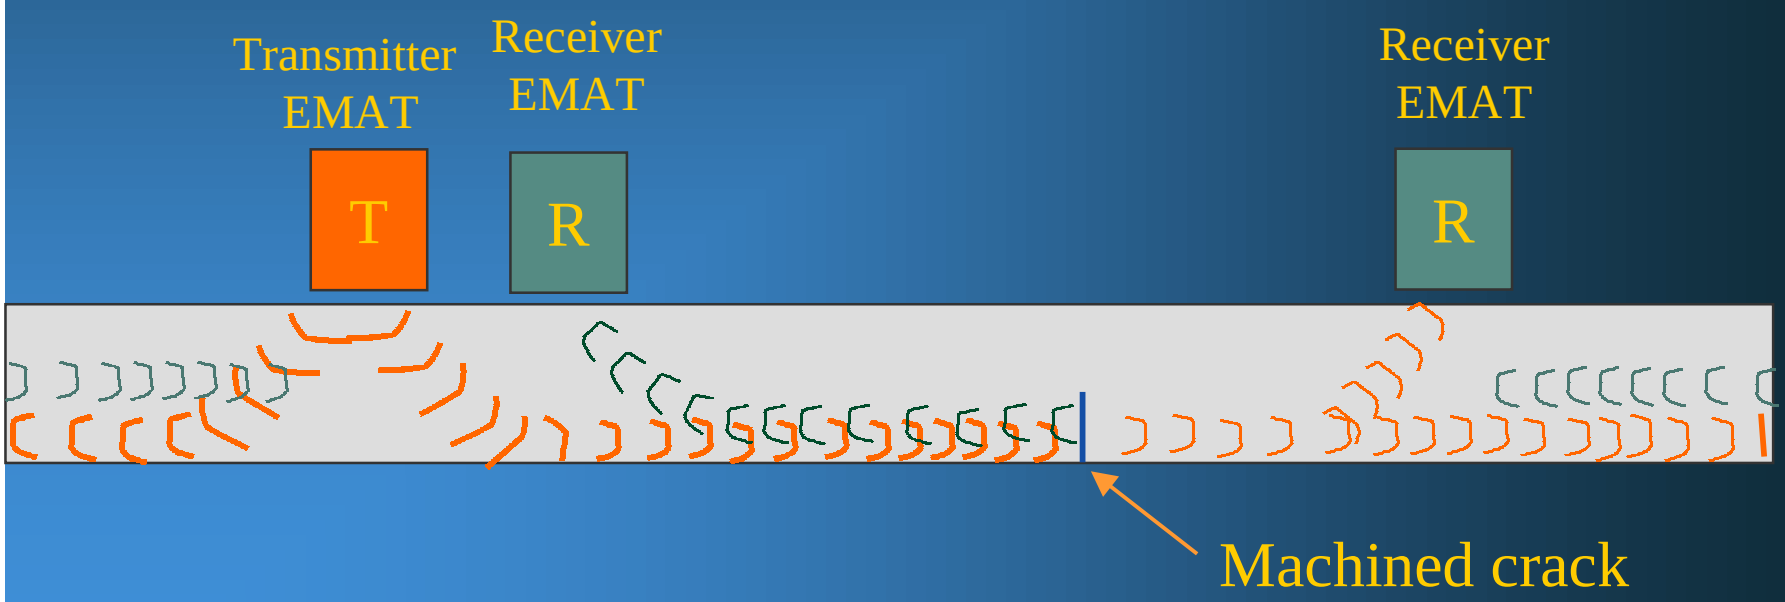

Tuboscope
A Varco Company

© 2001 Tuboscope

EMAT-to-EMAT: SV1 example trace

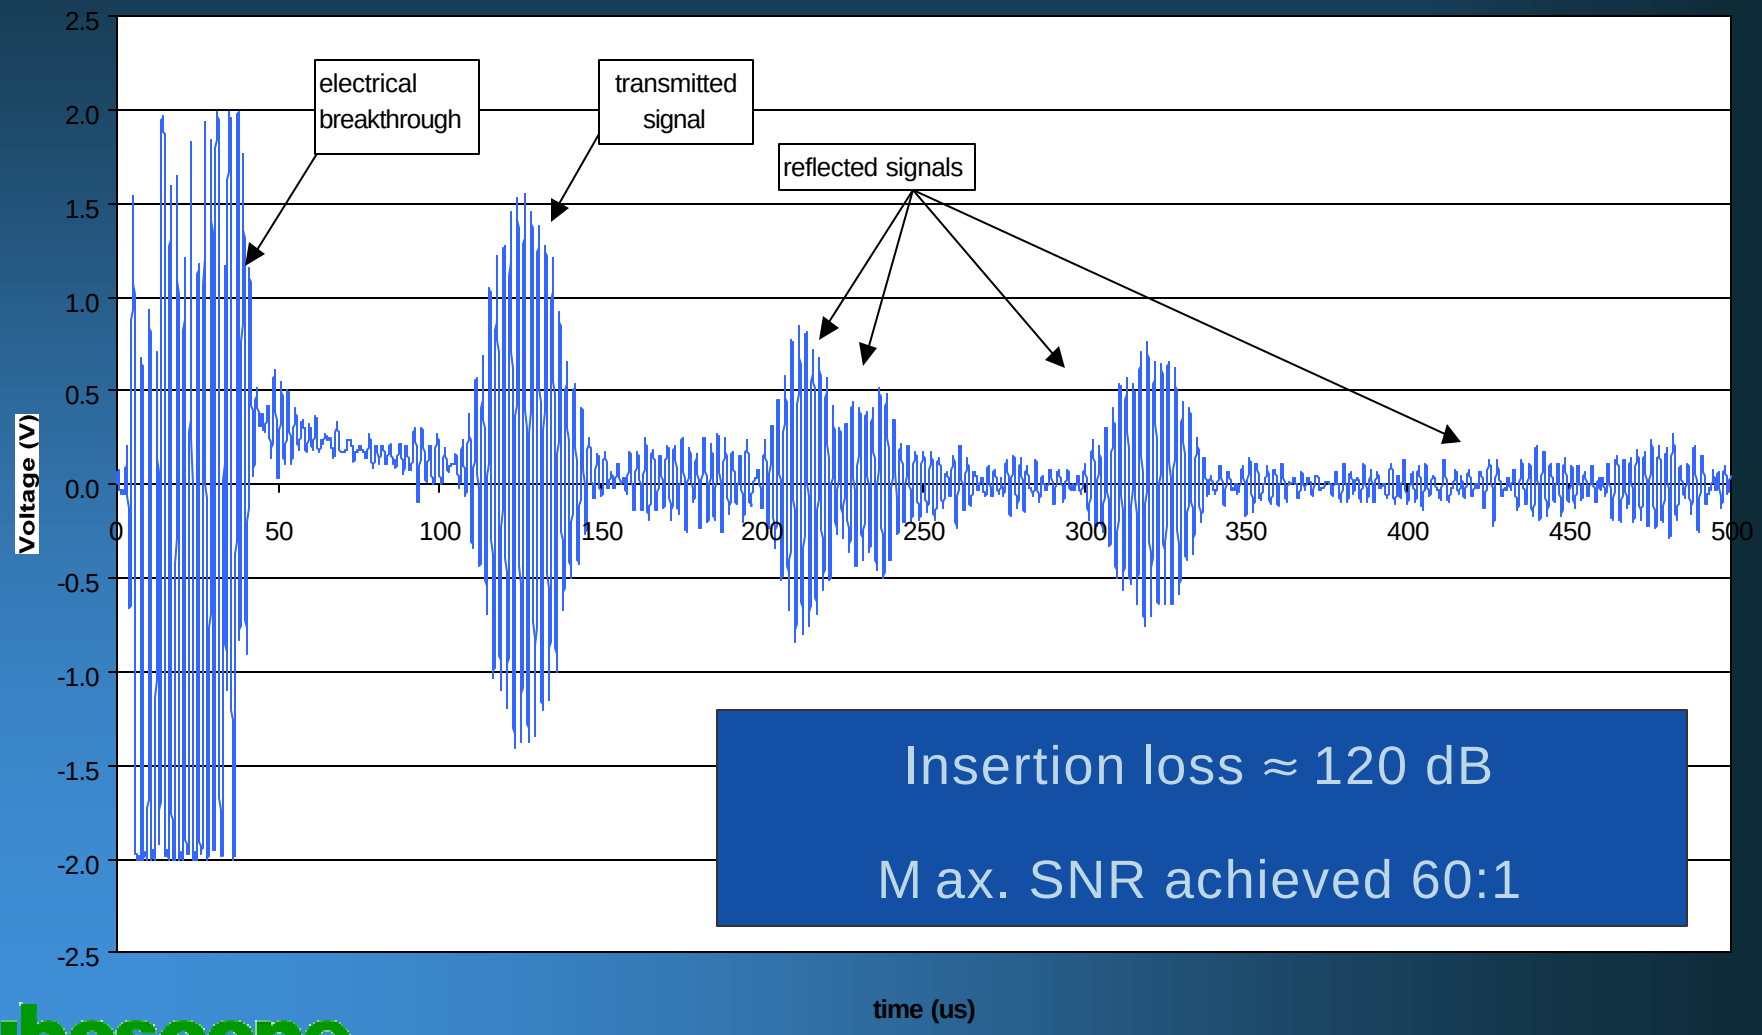

Insertion loss ≈ 120 dB

M ax. SNR achieved 60:1

Tuboscope
A Varco Company

© 2001 Tuboscope

Best Modes to Pursue at this time

→Magnetostrictively generated

Magnetic bias separate from the coil

Implies lighter , simpler transducer head

Skin depth saturation > simpler bias schemes

SH > Axial magnetizer SV > Circumferential

→SV1

Best SNR,

Demonstrated crack sensitivity

→SH0

Low dispersion & attenuation,

Recommended crack for interaction

→Other modes not as appealing

Too low or high in frequency or too long wavelength

May have too much attenuation or modal interferences

Tuboscope
A Varco Company

© 2001 Tuboscope

Man-made Crack Interactions

SV1

Actual > Prediction due to mode conversion

Effect OK but complicates interpretation

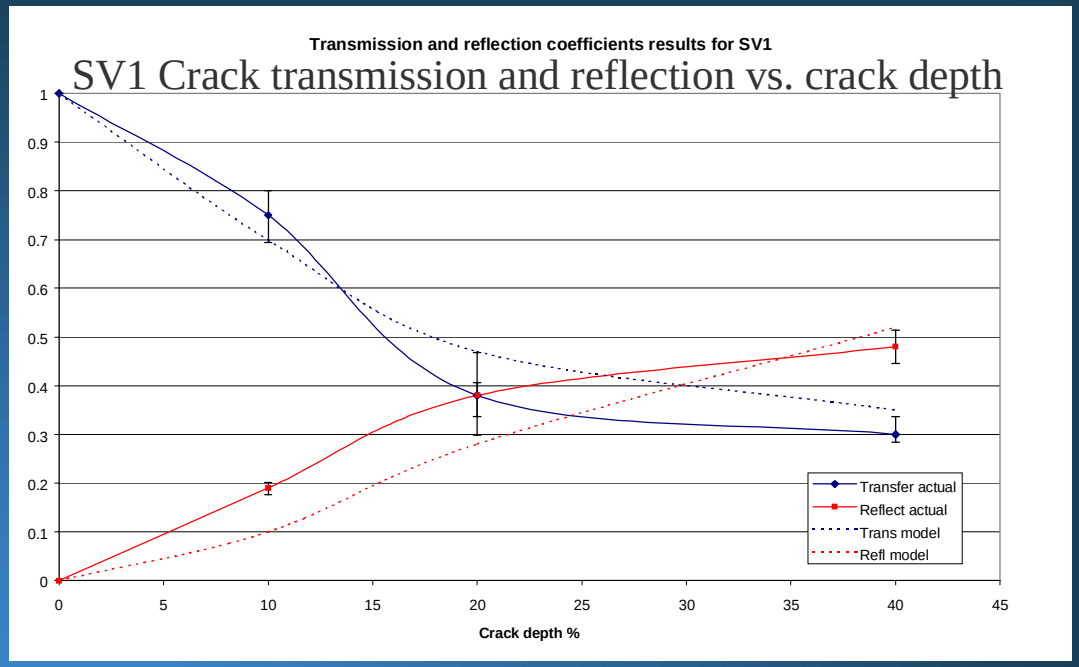

SH0

Good agreement between theory and measurement

Tuboscope
A Varco Company

© 2001 Tuboscope

Modal measurements & sensitivities

(liftoff, tilt, beam width)

→Has a wide beam (both advantage & disadvantage)

Low spreading and low axial sampling

Reduced short crack sensitivity and resolution,

→No side lobes

→Lift off sensitive

1 or 2 mm of liftoff

→Some tilt sensitivity

Tuboscope
A Varco Company

© 2001 Tuboscope

Possible EMAT Configuration

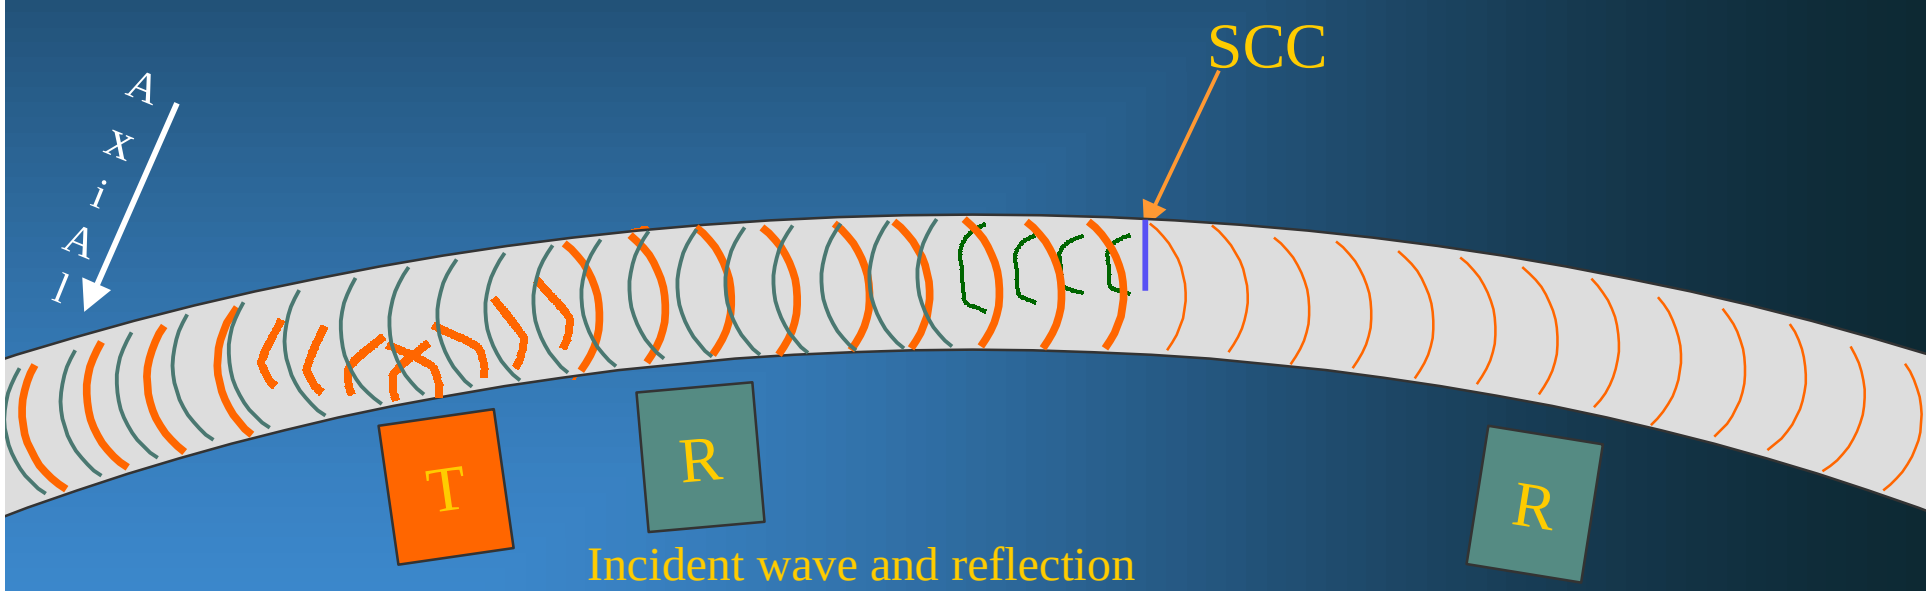

Transmitter EMAT

Incident wave and reflection measurement Echo Receiver EMAT

Transmission measurement Catch Receiver EMAT

Tuboscope
A Varco Company

SCC Scan For SV1 Transmission

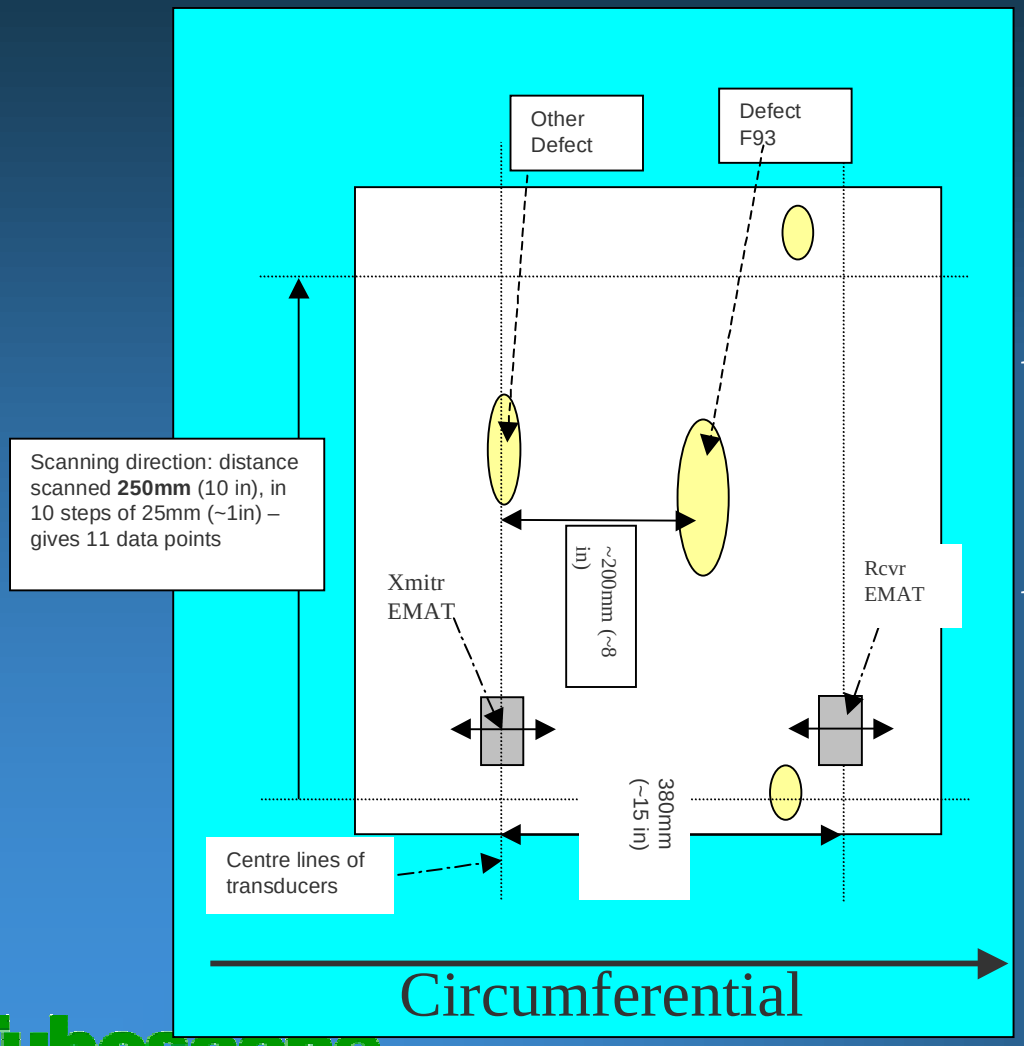

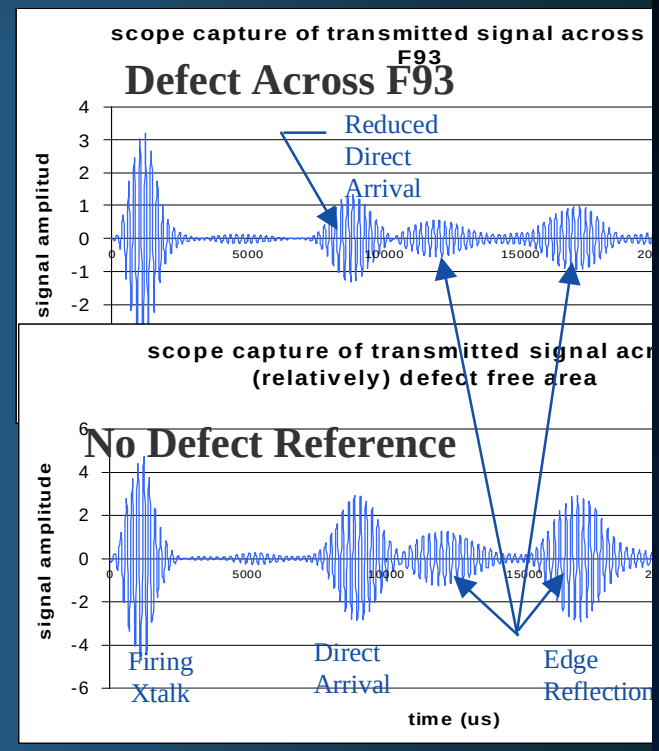

Axial

Circumferential

Tuboscope
A Varco Company

© 2001 Tuboscope

SCC Defect Scans

Dug Pipe Defect # 93

Conventional US acoustic ANDSCAN™ image

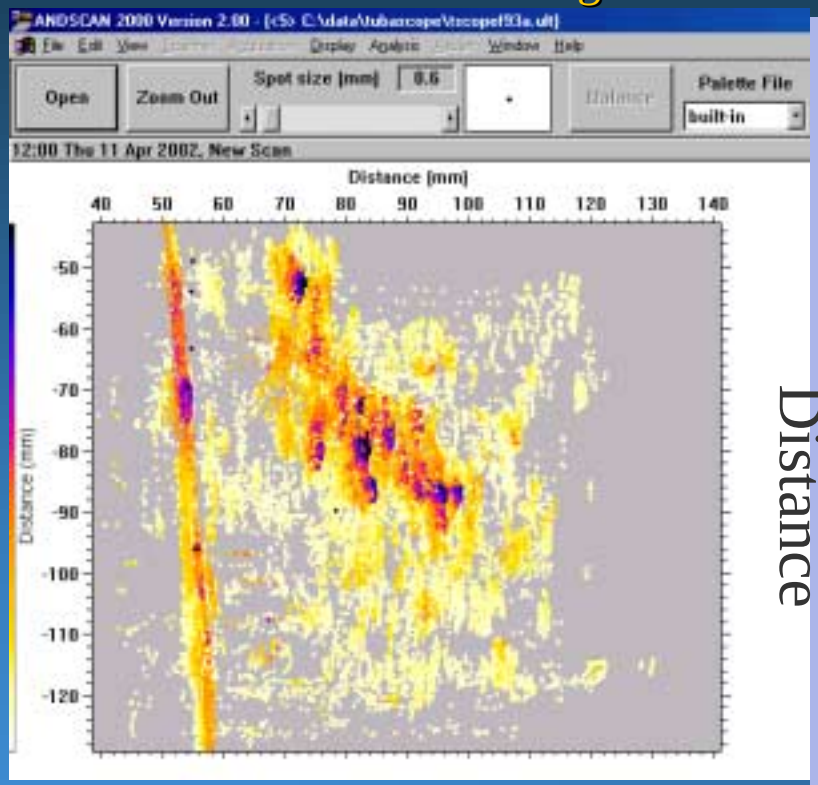

SV1 (470 kHz) Thru Transmission
Strong effects seen so far !!

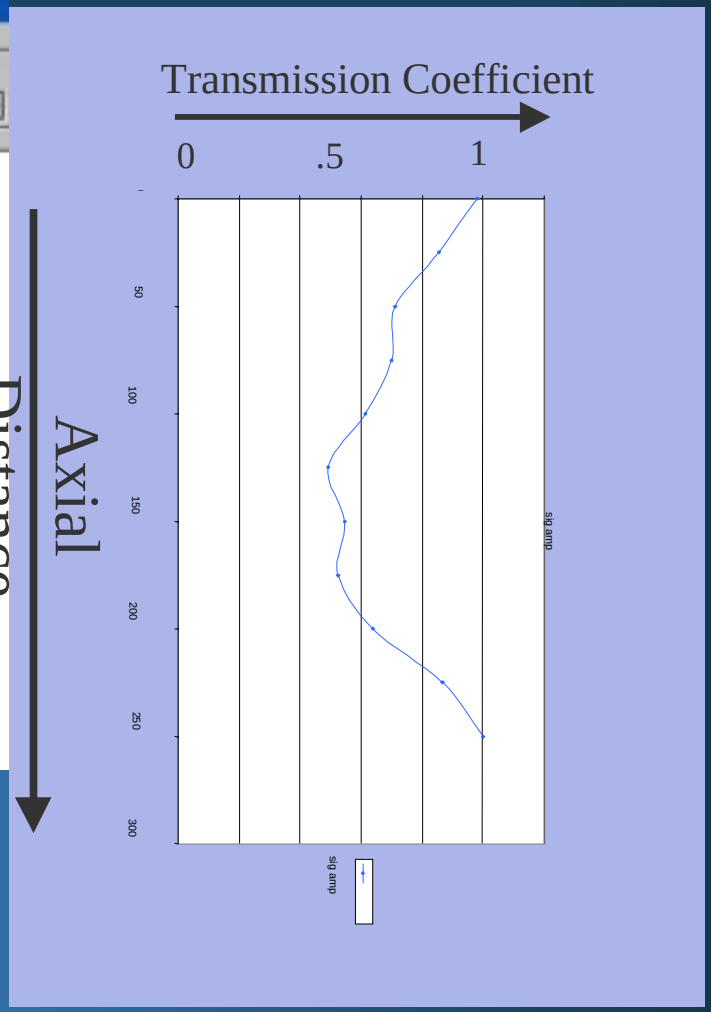

Tuboscope
A Varco Company

SCC Scan For SV1 Reflections

Scanning direction: distance scanned **250mm** (10 in), in 10 steps of 25mm (~1in) – gives 11 waveforms

Defect F93
70mm x 60 mm
15 -20%

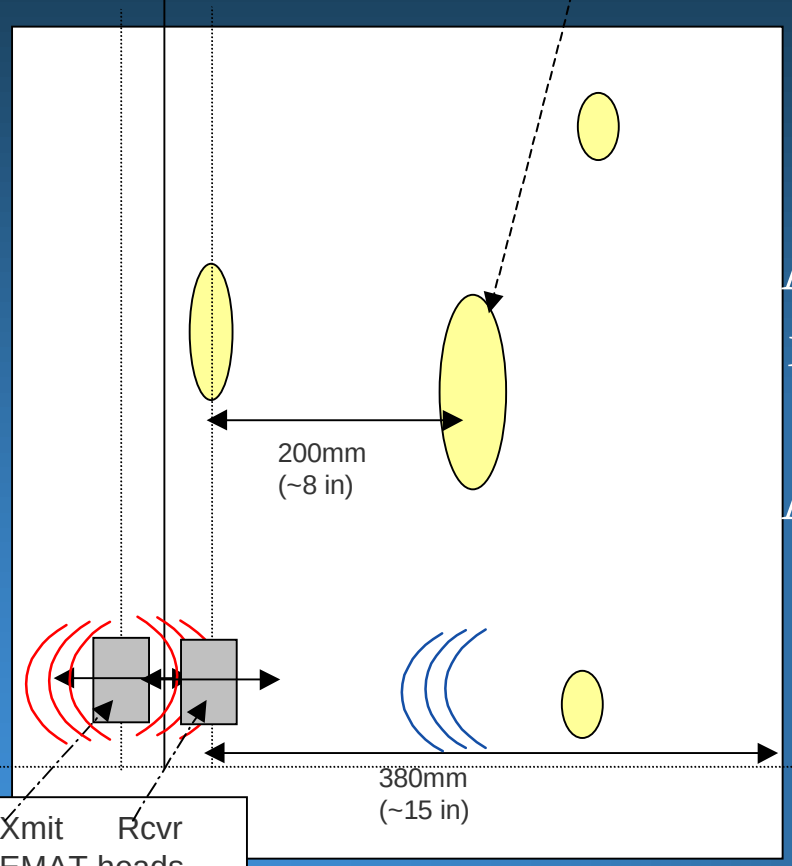

Xmit Rcvr
EMAT heads

Axial

Circumferential

Response from defects in specimen

direct signal

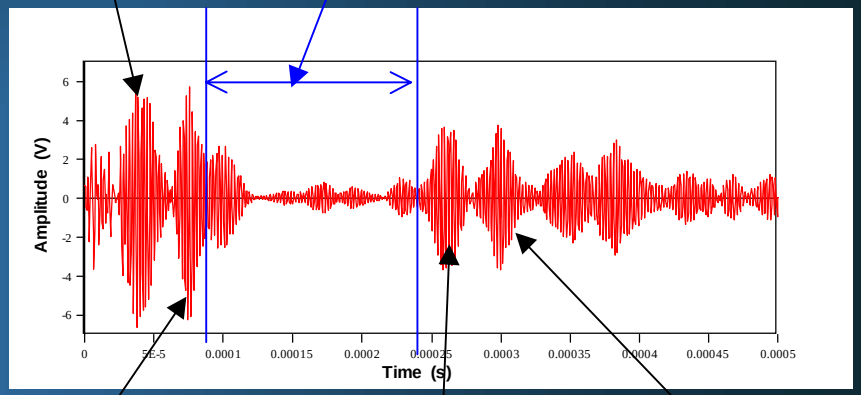

1st reflection from near edge

1st reflection from far edge

2nd reflection from near edge

Tuboscope
A Varco Company

© 2001 Tuboscope

Pig Prototype Circuits

→Pig preamp compact prototypes

Low power, broad band, very low electronics only noise

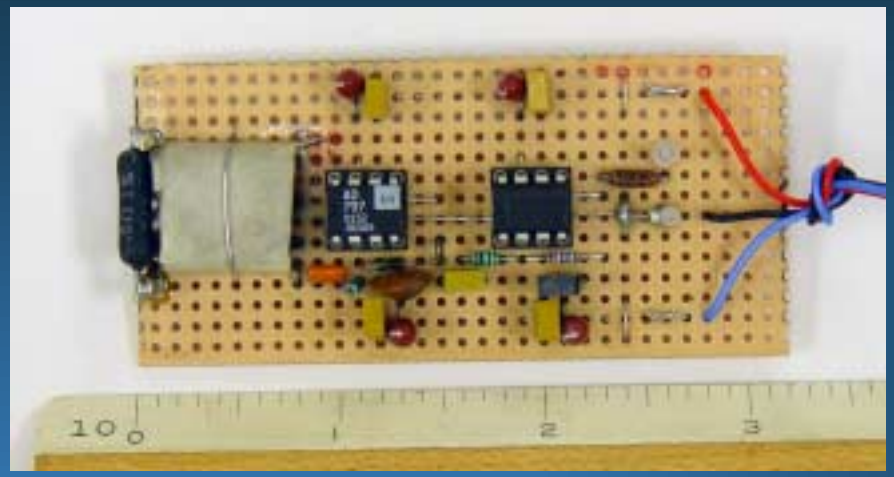

→Compact/efficient pig, pulsed power amps (100 A ptp)

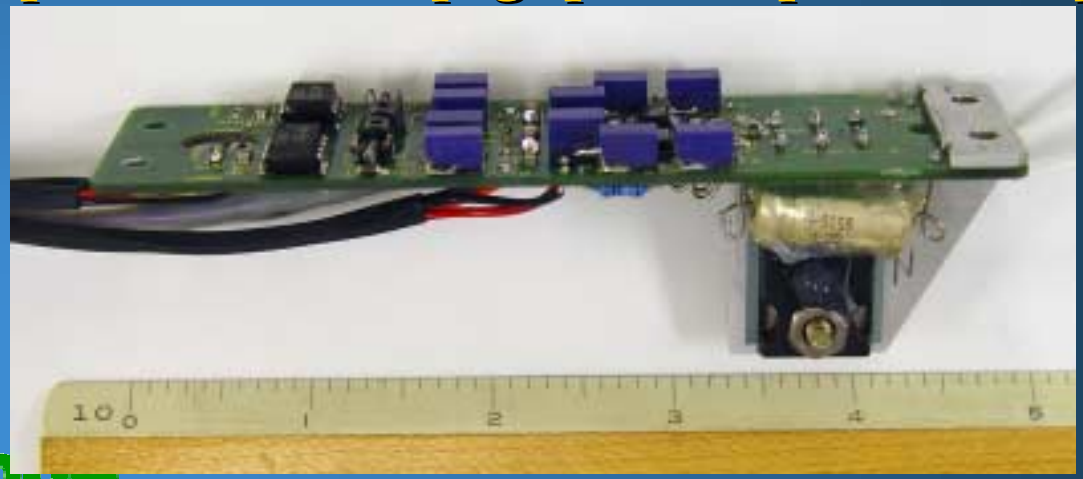

Tuboscope
A Varco Company

© 2001 Tuboscope

Near Future EMAT Goals

- →Complete design/build for pull tests
  - Transducers, mounts, magnetic biasing
  - Drive/receive electronics
- →Run pull tests

Tuboscope
A Varco Company

© 2001 Tuboscope

Thanks
DOE

Tuboscope
A Varco Company

© 2001 Tuboscope