



## Southeast Regional Carbon Sequestration Partnership (SECARB) Gulf Coast Stacked Storage Project

Field Test Location  
Cranfield Oilfield, Mississippi

Amount and Sources of CO<sub>2</sub>  
50,000 Tons from  
Natural Source (Jackson Dome)

### Primary Contacts

#### **DOE/NETL Project Manager**

Mr. Bruce Lani  
bruce.lani@doe.netl.gov

#### **Principal Investigator**

Mr. Kenneth J. Nemeth  
Southern States Energy Board  
(SSEB)  
nemeth@sseb.org

#### **Field Test Site Contact**

Dr. Susan Hovorka  
Gulf Coast Carbon Center  
susan.hovorka@beg.utexas.edu

### Field Test Partners

#### **Primary Sponsors**

DOE/NETL  
SSEB  
The University of Texas at Austin

#### **Industrial Partners**


Advanced Resources, International  
Chevron  
Denbury Resources  
Entergy  
Kinder Morgan  
Lawrence Berkeley National  
Laboratory  
Los Alamos National Laboratory  
Marathon Oil Corporation  
Mississippi State University  
Pinnacle Technologies  
Praxair  
Sandia Technologies  
Schlumberger CO<sub>2</sub>  
Southern Company  
University of Mississippi

### Summary of Field Test Site and Operations

The Southeast Regional Carbon Sequestration Partnership's (SECARB) Gulf Coast Stacked Storage Project demonstrates the concept of phased use of subsurface volumes, combining early use of carbon dioxide (CO<sub>2</sub>) for enhanced oil recovery with later injection into deeper and larger volume brine formations. The benefits of this phased development are short-term, large-volume injection with immediate commercial benefit supporting research and infrastructure development followed by use of deeper brine-bearing formations for large volume, long-term storage. Technical focus areas are: (1) documenting retention in the injection zone; (2) quantifying capacity; and (3) quantifying pressure response to injection. The Cranfield unit in Southwest Mississippi is the site of this test. The Gulf Coast Carbon Center (GCCC) at the University of Texas-Austin's Bureau of Economic Geology (BEG) leads the Cranfield stacked storage project.

SECARB has determined that the saline formations of the Gulf Coast are extensive and of regional significance as potential sinks for carbon sequestration. The Gulf Coast Basin has the potential to become a major site, and perhaps the nation's predominant site, for carbon sequestration.

The Gulf Coast of Alabama, Mississippi, Louisiana, and Texas is formed by the thickest sedimentary wedge in the onshore United States. This clastic sequence is comprised of late Mesozoic to Cenozoic age formations in six sub-basins. All the formations are composed of porous and permeable fluvial, deltaic, shoreline, and marine sandstones, separated by regionally extensive thick impermeable marine shales that isolate fluids. Further compartmentalization and isolation of storage volumes throughout the Gulf Coast is provided by structures, which include anticlinal four-way closures, roll-over anticlines, and fault bounded traps.

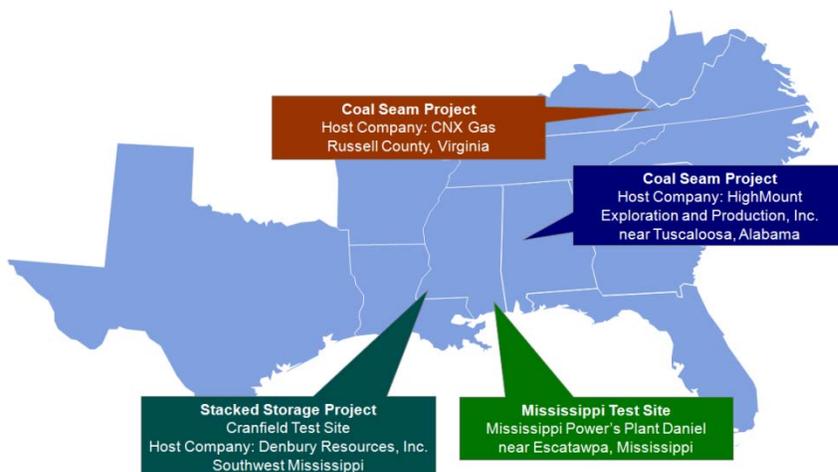

SECARB Phase II Geographic Region and Field Test Site Locations

The permanence of storage in these formations is well documented by oil and gas that has been trapped for long time periods by structures and seals. Representative world-class sequestration target formations in the Gulf Coast are the Cretaceous Tuscaloosa Formation of the Mississippi salt basin and the equivalent Woodbine Formation of the East Texas Basin, and Cenozoic age Wilcox, Vicksburg/Frio, and Miocene Formations of the lower Gulf Coast. The Tuscaloosa Formation lies beneath an area of approximately 46,000 square miles in southern Alabama and Mississippi, the Florida Panhandle, and Louisiana (Figure 1). Using NATCARB 2008 assumptions, Massachusetts Institute of Technology (MIT) has estimated a minimum storage volume for the Tuscaloosa Formation of 14,000 million metric tonnes of CO<sub>2</sub>. The Woodbine of East Texas, a continuation of this regionally significant CO<sub>2</sub> sink, can hold approximately equivalent volumes. Additional storage in the Gulf Coast Cenozoic reservoirs, expanded in 2008 to include offshore, is estimated to be more than 2,000 billion metric tonnes. Data from the Tuscaloosa trend can also help provide improved capacity estimates for the Cretaceous of the eastern seaboard, which presents the best target for this area, totaling an additional 134,000 million metric tonnes of CO<sub>2</sub>.

The sequestration target being tested for the Gulf Coast Stacked Storage Project is within and associated with Denbury's Cranfield unit (Figure 1), and lies east of Natchez, Mississippi. The injection target was selected to be representative of the high quality targets provided by the Gulf Coast, in that it lies within the thick marine-reworked to fluvial lower sandstone of the Tuscaloosa Formation in a typical Gulf Coast four-way closure (Figure 2). This test site was selected at a location where large volumes of pipeline CO<sub>2</sub> are available as of July 2008 and where existing infrastructure and substantial industry match allow an ambitious field investigation to be completed on available budget and in the near term.

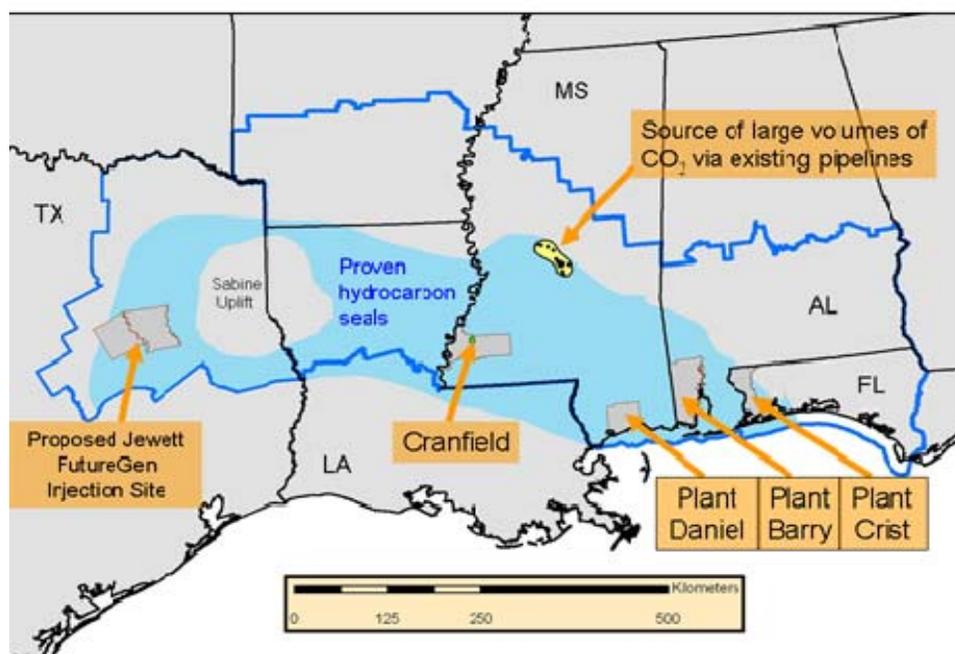


Figure 1. Geographical location of Denbury Resources, International's Cranfield Unit east of Natchez, Mississippi

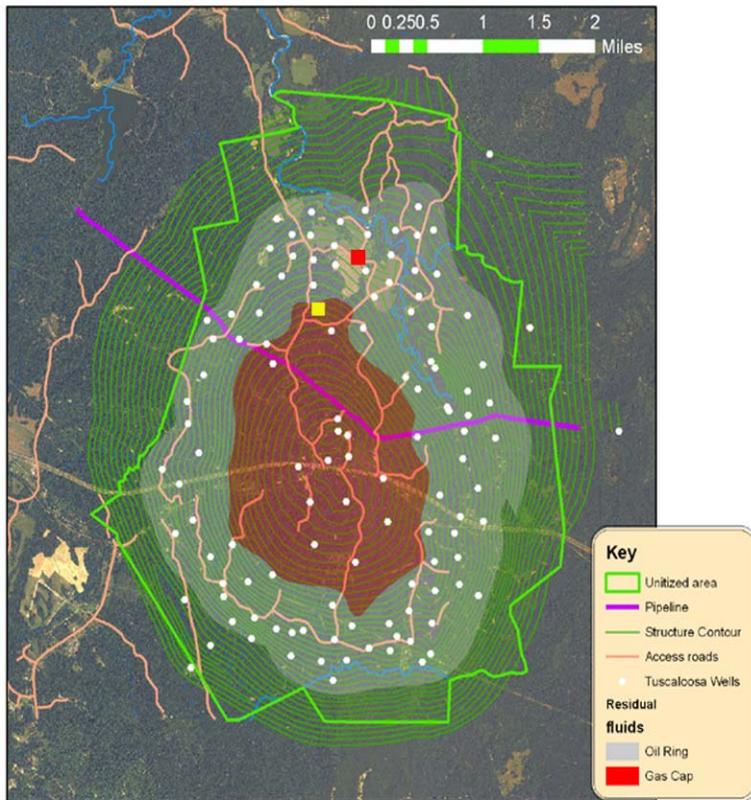


Figure 2. Injection target for the Stacked Storage Project lies within the thick marine-reworked to fluvial lower sandstone of the Tuscaloosa Formation in a typical Gulf Coast four-way closure

## Research Objectives

### Phased Use of Subsurface Volume

The stacked storage concept is based on the following assessment: Where large volume oil fields in decline exist in a region, market forces will determine that initial anthropogenic carbon capture will supply CO<sub>2</sub> for enhanced oil recovery (CO<sub>2</sub>-EOR). As the CO<sub>2</sub> demand for EOR decreases over decades and volumes of CO<sub>2</sub> captured increase, brine storage will become widely utilized. Existing and developed pipeline infrastructure and favorable geologic setting will favor continued injection in the same geologic trends that hosted EOR resources. Lack of cement behind casing in EOR production wells will limit the use of horizons shallower than the EOR interval for brine storage. However, injection into brine-bearing formations below and adjacent to former production may prove to be attractive targets. Deeper formations in the same footprint as oil production have attractive characteristics in that they are geologically well known, have well-defined surface and mineral ownership, and public acceptance of subsurface activities is high.

Key information needed to demonstrate the validity of this model are: (1) will CO<sub>2</sub> used for EOR be retained in the subsurface effectively so that benefit to the atmosphere is produced, especially considering the impact of well penetrations; (2) how should the capacity in large volumes below and downdip of the reservoirs be calculated, as this will determine how large a footprint will be underlain by CO<sub>2</sub>; and (3) is the pressure response in the near and far field understood quantitatively well enough to safely move to large volume injection?

GCCC has partnered with Denbury Resources of Plano, Texas, to begin to answer these questions under realistic conditions associated with large volume injection (greater than half a million tons per year CO<sub>2</sub>). The CO<sub>2</sub> injection design used by Denbury is identical to that which would be used for large volume storage in that CO<sub>2</sub> is injected continuously, so that the CO<sub>2</sub> injection volume and field pressure is high as compared to the West Texas process of injection of water alternating with gas (WAG). The Cranfield oil field was depleted in the mid-1960's and wells plugged and abandoned (P&A), so that the field has had more than 40 years to reequilibrate. Over this time, pressure has recovered to near original pre-production pressure because of water incursion. Denbury has redeveloped the field to produce remaining oil with CO<sub>2</sub>-EOR, with injection starting July 2008. The field is currently undergoing pressure increase in the injection zone and oil production is anticipated in the near future. However, at this time it is a close analog for conditions of a large volume CO<sub>2</sub> storage project.

The Denbury pipeline network is supplied by the Jackson Dome, a naturally occurring subsurface source of CO<sub>2</sub>. Denbury's development plan calls for the incorporation of anthropogenic CO<sub>2</sub> into the pipeline network and further expansion of the network into Mississippi, Alabama, Louisiana and Texas. Ultimately this pipeline network will connect depleted reservoirs and large volume brine storage to sequester anthropogenic CO<sub>2</sub> produced throughout the region.

## Plan Implementation

Detailed characterization of the field, the foundation of both good flood design and successful monitoring strategy, was completed in the spring of 2008 by Denbury and GCCC. Two hundred 1940's vintage wireline logs provide stratigraphic and structural data; several hundred sidewall cores plugs and detailed field production records provide information on fluid flow. New characterization data contributed by Denbury includes a 3-D seismic survey and data from ten new wells including open-hole logs, whole cores from two wells, and side wall cores from two others have been provided to GCCC as matching data. Stratal slicing of the seismic volume to assess storage volume interconnectivity has been completed, as well as assessment of new and existing cores to evaluate seal and monitoring intervals.

The lower Tuscaloosa injection zone at Cranfield is a highly heterogeneous complex of fluvial channel sandstones and conglomerates. Basal Tuscaloosa conglomerates (unit E) are incised into marine shales and silts of the Washita-Fredericksburg Group; overlying lithic arkoses are poorly sorted and show sinuous patterns with amalgamated cross-bedded and point bar deposits forming a fairly continuous sand-rich zone across the field (unit D). Calcite and Fe-chlorite cements further complicate the flow system developed in these rocks. Red overbank mudstones serve as seals on the oil-producing interval. Overlying fluvial sandstones (A through C) show more strongly aggradational characteristic in that they are not amalgamated, and form more discontinuous sand-rich horizons across the field. The middle Tuscaloosa lithology can be examined only in cuttings, which document a dominant fissile dark shale lithology.

The SECARB monitoring program for Phase II Stacked Storage at Cranfield was deployed in the Spring of 2008. A novel test element is a dedicated observation well to allow monitoring of two zones: the lower Tuscaloosa injection zone and an aerially continuous, 12 ft thick, 100 md sandstone in the upper Tuscaloosa which serves as an above-zone monitoring horizon. Modeling shows that, should significant leakage occur through the reservoir seal through preferred conduits such as flawed well completions or faults in the area, the flood would result in pressure increases in the monitoring zone. This test will assess the adequacy of established Mississippi well integrity standards for retaining CO<sub>2</sub> for greenhouse gas mitigation. Denbury donated access to a plugged and abandoned former production well, the Ella G. Lees #7, which was reentered and repaired to serve as a dedicated monitoring well. Real-time pressure and temperature data from both are transmitted via wireline to a satellite uplink at the well, providing real-time access to 10 minute data, with higher frequency data collected by download at the site. An option to sample fluids for geochemical confirmation of leakage is designed in case anomalies are detected. In the initial two months, increasing pressure in the injection zone has been observed, but the above zone monitoring pressure has not increased, suggesting that no leakage is occurring. Additional monitoring includes daily tracking well-head pressures, pressure memory gauges and dip-in pressures, and fluid composition changes measured with Schlumberger's Reservoir Saturation Tool (RST) in an area around the initial injection and observation well. Additionally a surface program of monitoring soil gas at plugged and abandoned wells is underway.

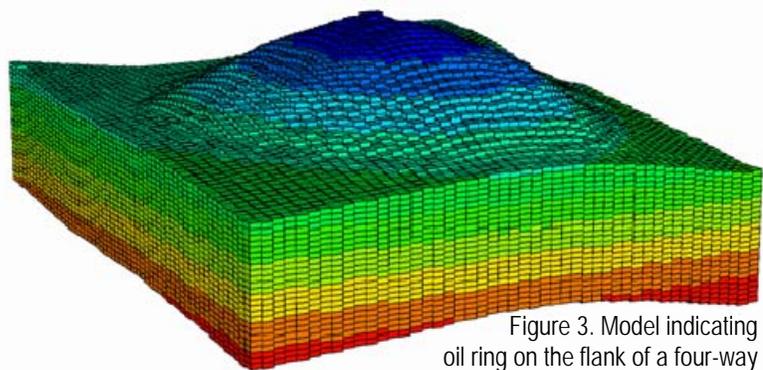


Figure 3. Model indicating oil ring on the flank of a four-way anticlinal closure

## Regional Significance

The economic engine that can help power the initial deployment of carbon capture and separation (CCS) technology is CO<sub>2</sub>-based enhanced oil recovery. However, to use this technology to support CCS, it is important to document how well CO<sub>2</sub> is retained in an area with numerous existing well penetrations. This test will provide the first quantitative field test of well integrity across many wells. It complements the Southwest Regional Sequestration Partnership test at SACROC where CO<sub>2</sub> has been injected over decades.

The Bureau of Economic Geology has made a conservative estimate that over 5 billion barrels of oil are recoverable by CO<sub>2</sub> EOR in the target area of east Texas, Louisiana, Mississippi and Alabama. This activity can help pay for the CCS equipment, regional CO<sub>2</sub> pipelines, and compression facilities that can also be used for putting CO<sub>2</sub> into long term storage in deep brine reservoirs in the Gulf Coast. Preliminary economic modeling by the BEG and the Massachusetts Institute of Technology (MIT) support the conclusion that such regional pipeline complexes linking many sources and sinks are more efficient than single pipelines linking individual sources and sinks. Such regional pipelines also allow matching capture and injection rates across multiple sites to reduce risk.

The Gulf Coast region contains more than 3,000 oil and natural gas reservoirs that could be used first for EOR and then for large-volume, long-term storage of CO<sub>2</sub> in nonproductive formations below the reservoir interval. Many oil reservoirs have at least one deeper brine aquifer that could be accessed by drilling deeper sequestration injection wells from existing field footprints.

By contrast, suitable sequestration formations do not exist in widespread areas of the southeast United States. SECARB is continuing its characterization of geologic formations in the 11-state region. Available data suggests that suitable target formations do not exist within eastern Virginia, North Carolina, South Carolina, and northern Georgia, raising the importance of the world-class sequestration target formations in the Gulf Coast in providing potential CO<sub>2</sub> storage sites for parts of the region where the subsurface may prove to be unsuitable.

<p><b>Cost</b></p> <p><b>Total Field Project Cost (Years 1-4):</b>    <u>\$7,790,649</u></p> <p><b>DOE Share:</b>                    <u>\$4,634,562</u>    <u>59%</u></p> <p><b>Non-DOE Share:</b>            <u>\$3,156,087</u>    <u>41%</u></p>	<p><b>Field Project Key Dates</b></p> <p><b>Characterization Completed:</b> Q1, FY08</p> <p><b>Workover Operations Completed:</b> Q2, FY08</p> <p><b>Injection Operations Begin:</b> Q3, FY08</p> <p><b>MMV Events:</b></p> <p>          <b>Pre-injection baseline completed:</b> Q2, FY08</p> <p>          <b>Injection monitoring continues:</b> Q2, FY08-FY09</p>
--	--

*This material is based upon work supported by the U.S. Department of Energy National Energy Technology Laboratory under DE-FC26-04NT42590.*

