Evaluation of analytical and semi-analytical solutions for modeling and mapping of the area of review (AoR)

Stephen Kraemer, Ph.D.
U.S. Environmental Protection Agency

DOE/EPA Collaborative Review, Pittsburgh, PA, 24 March 2010

zones of concern

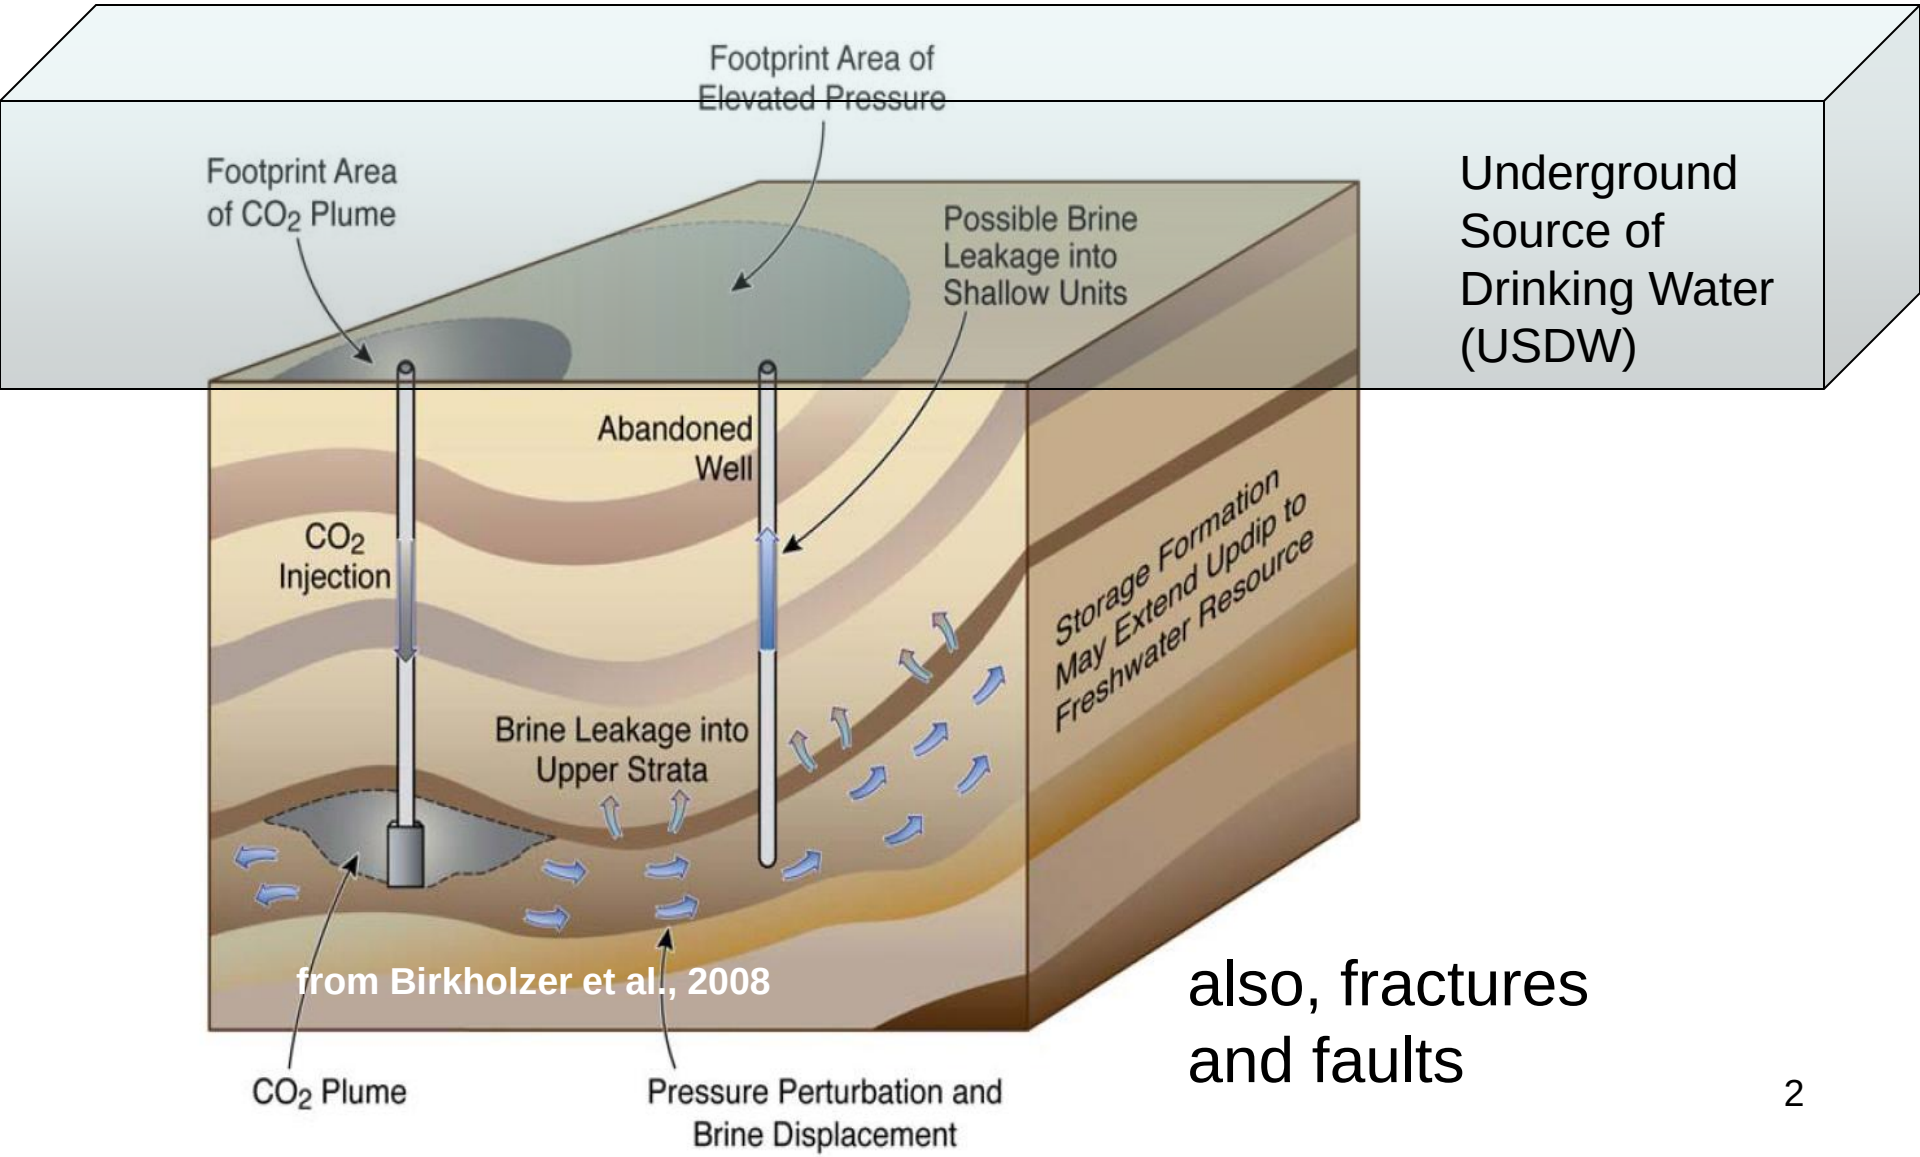

from Birkholzer et al., 2008

Underground Source of Drinking Water (USDW)

also, fractures and faults

Area of Review (AoR) is a regulatory tool

- proposed UIC Class VI (CO_2 injection wells)
- based on the potential for endangerment of the USDW
- AoR focuses the survey for compromises of the sealing layer (fractures, faults, abandoned wells)
- corrective action evaluated for abandoned wells in AoR

Need for Simple AoR Tools

"Keep your models as simple as possible …
but not simpler." --- Albert Einstein

- tools to assist the regulator to evaluate the permit application
- tools to build initial understanding of a site and prepare for detailed numerical simulation
- arbitrary fixed radius (e.g. 2 mile) might be too simple
- analytical and semi-analytical solutions are easy to use and understand and fast

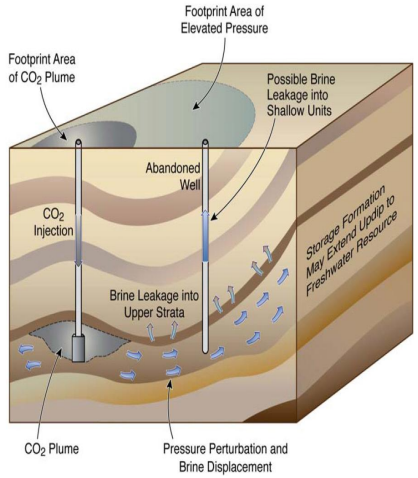

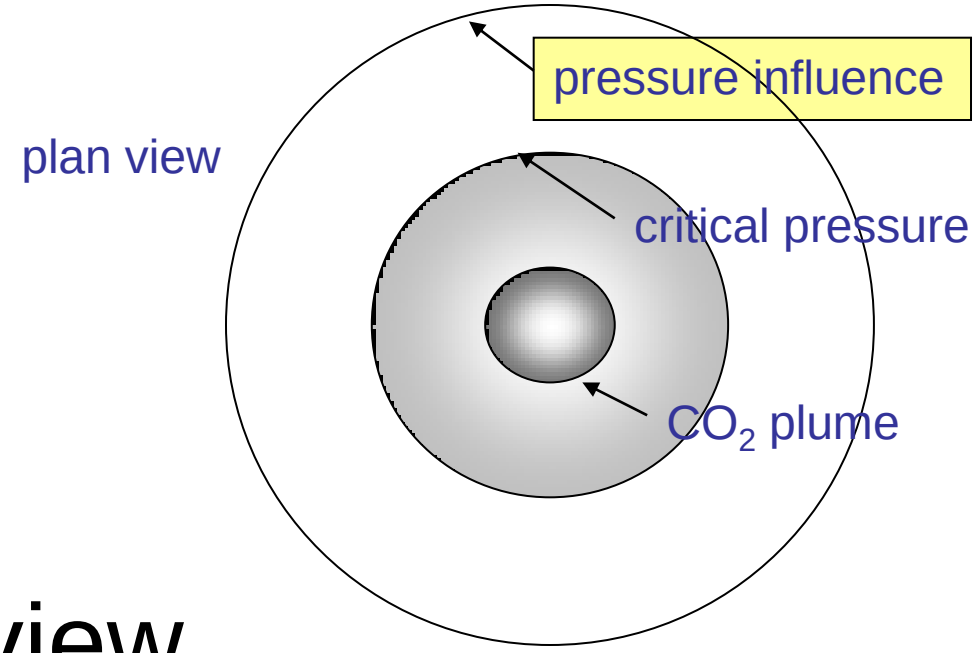

Area of Review

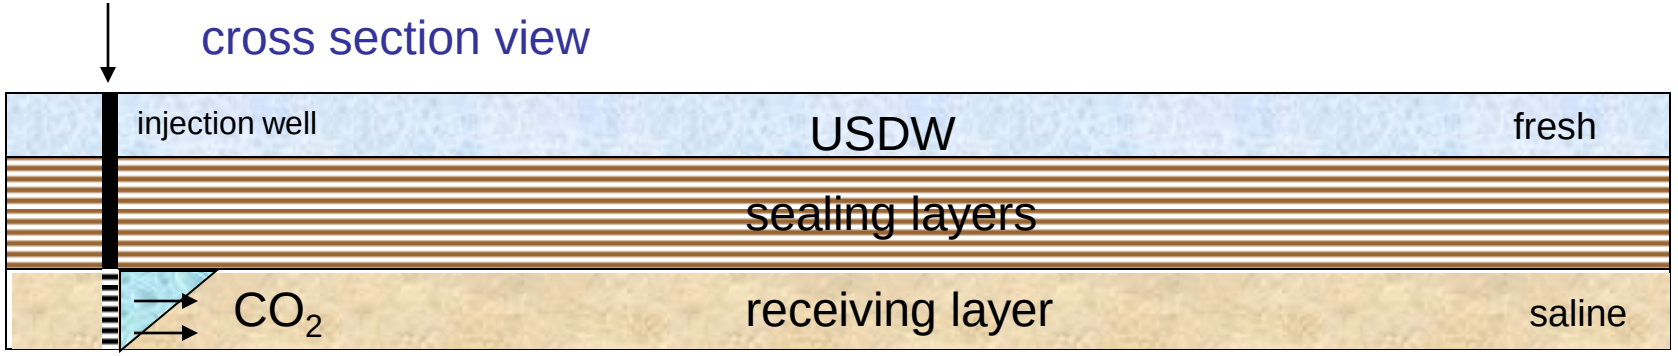

Project Objectives

- Task 1. Investigation of the analytical and semi-analytical solutions for pressure increase and CO_2 plume.

- Task 2. Development of the modeling frameworks (computational engines, user interfaces).

- Task 3. Testing of the AoR tools through comparison to numerical simulations and case studies.

Pressure Influence (1) simplest

(Theis, 1935)

$$\Delta p = \frac{Q}{4\pi KH} W(u);$$

$$u = \frac{S\ r^2}{4KHt}$$

Δp is the change in pressure [FL^{-2}]

Q is the injection rate (positive into the aquifer) [L^3T^{-1}]

K is the hydraulic conductivity of the aquifer [L^2]

S is the storativity of the aquifer [-]

r is the radial distance from the center of the injection well [L]

H is the aquifer thickness [L]

t is time since injection started [T]

$W()$ is the well function

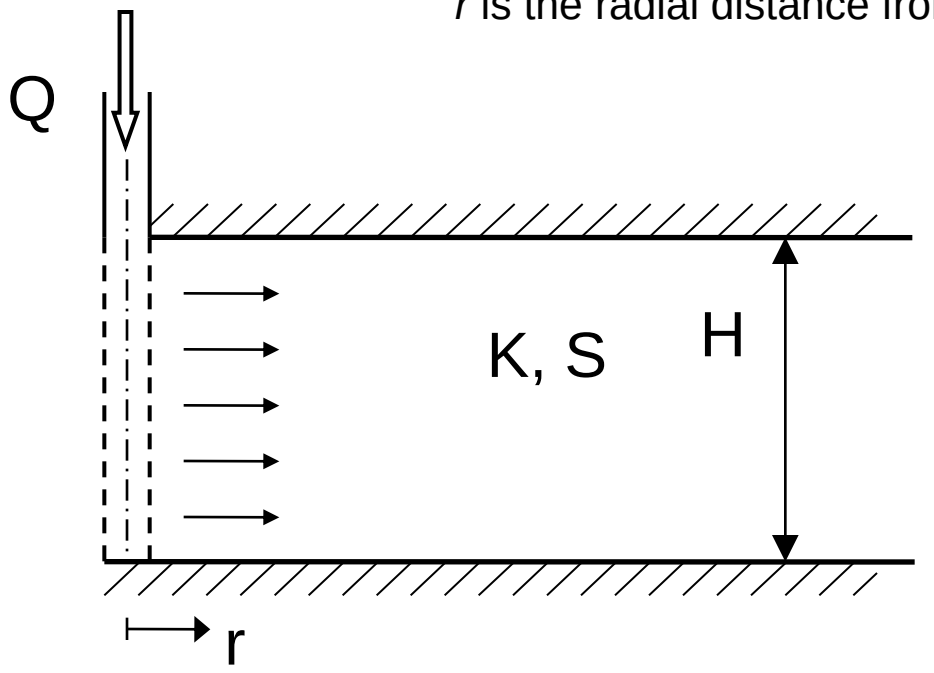

Note: given a constant mass injection rate goal for CO_2, an equivalent injection volume rate of brine is informed by ECO2N.

Pressure Influence (2)

Hantush-Jacob
1955

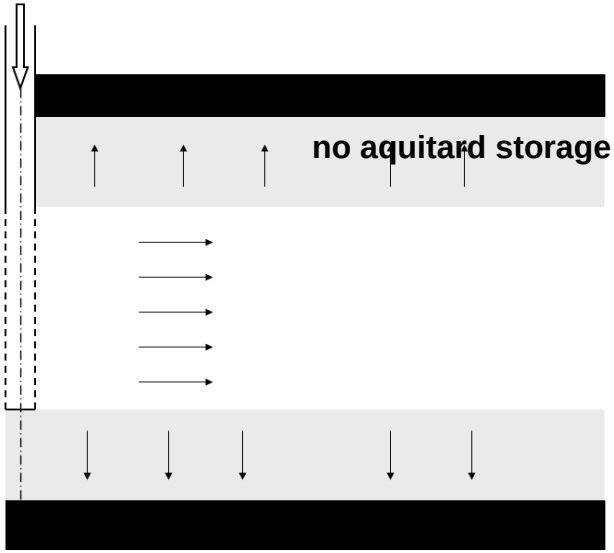

Moench
1985

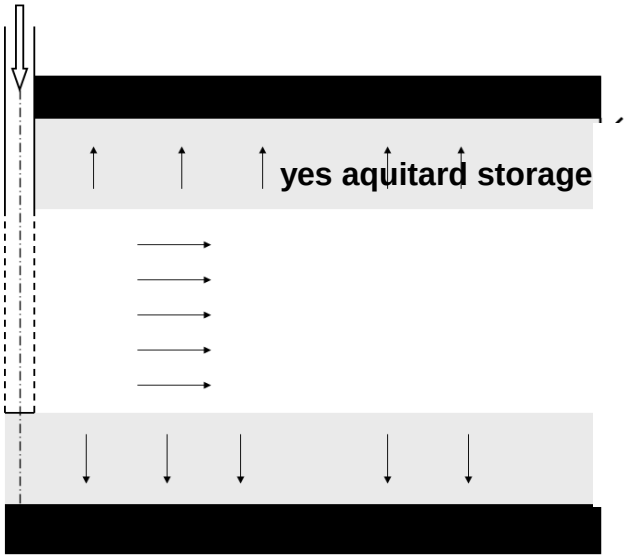

Zhou et al.
2009

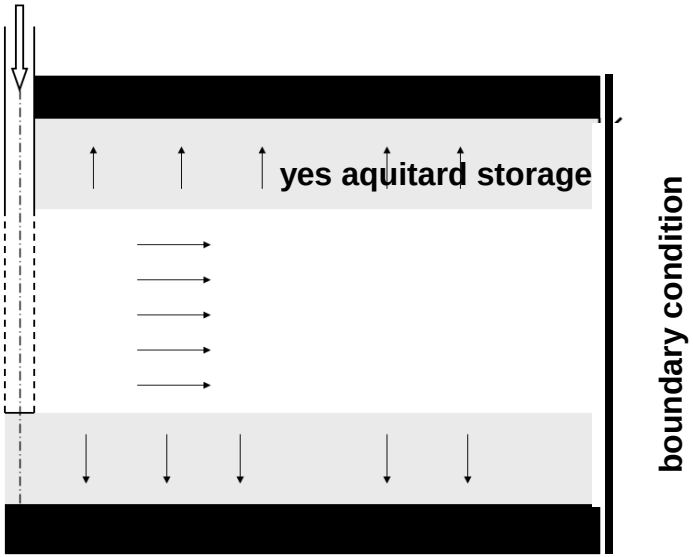

also working on
- multi aquifer layers

Critical Pressure (1) simplest

$$\Delta p_c = 0.433[\gamma_B D_B + \gamma_W (D_W - L)] - p_0$$

psi pressure distance units ft

or relative density

$\gamma_B \equiv$ *average specific gravity of the brine* → RD_b

$\gamma_W \equiv$ *average specific gravity of freshwater* → RD_w

p_0 = *original reservoir pressure injection interval*

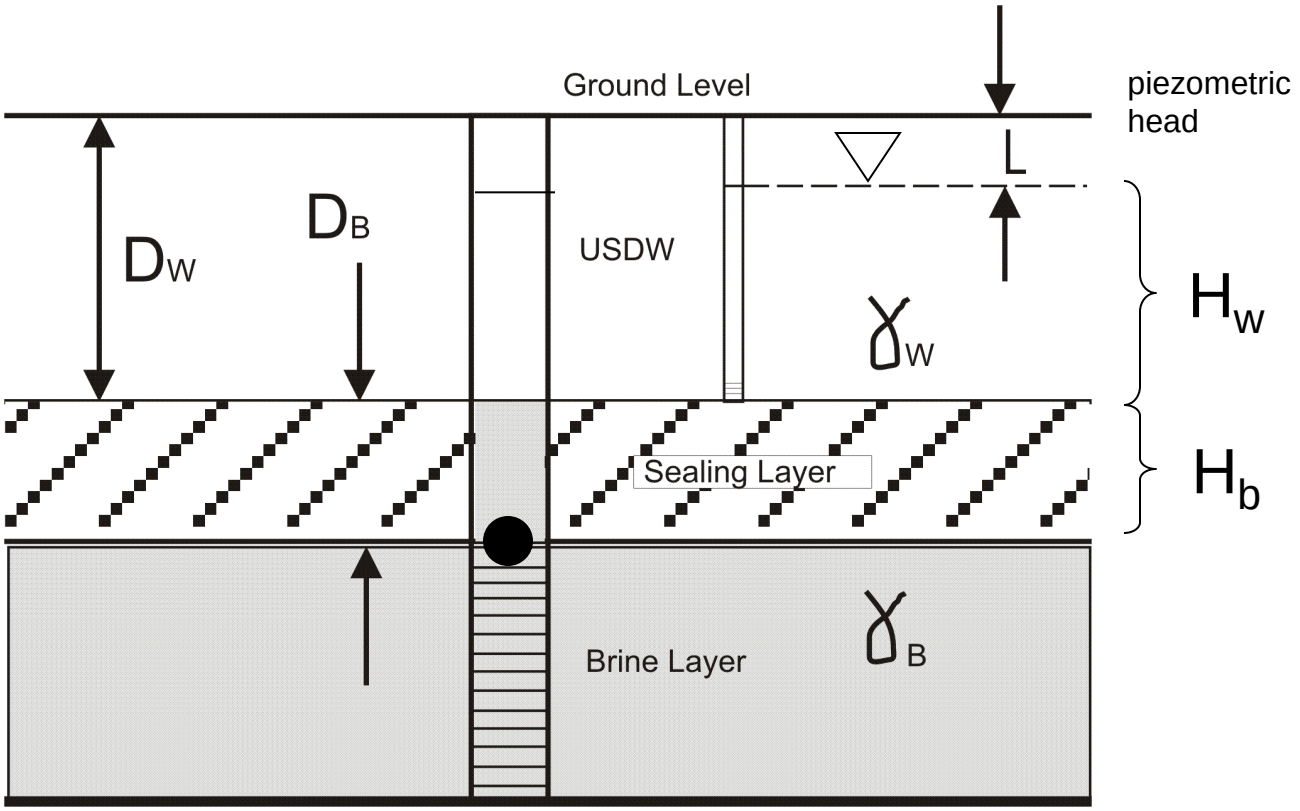

Critical Pressure (2)

(Nicot et al., 2008)

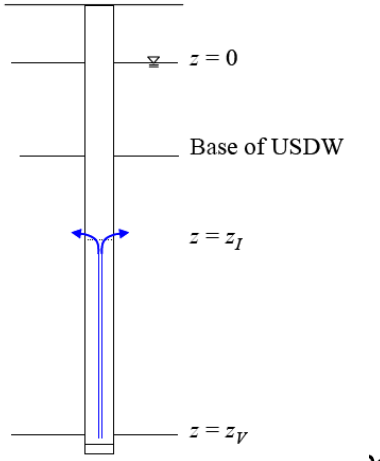

$$\frac{\Delta P}{g} = (z_v - z_I)\left(\frac{\lambda - \xi}{2}(z_v - z_I) + \underbrace{\rho_{I,\lambda} - \rho_I}_{\text{density difference}}\right)$$

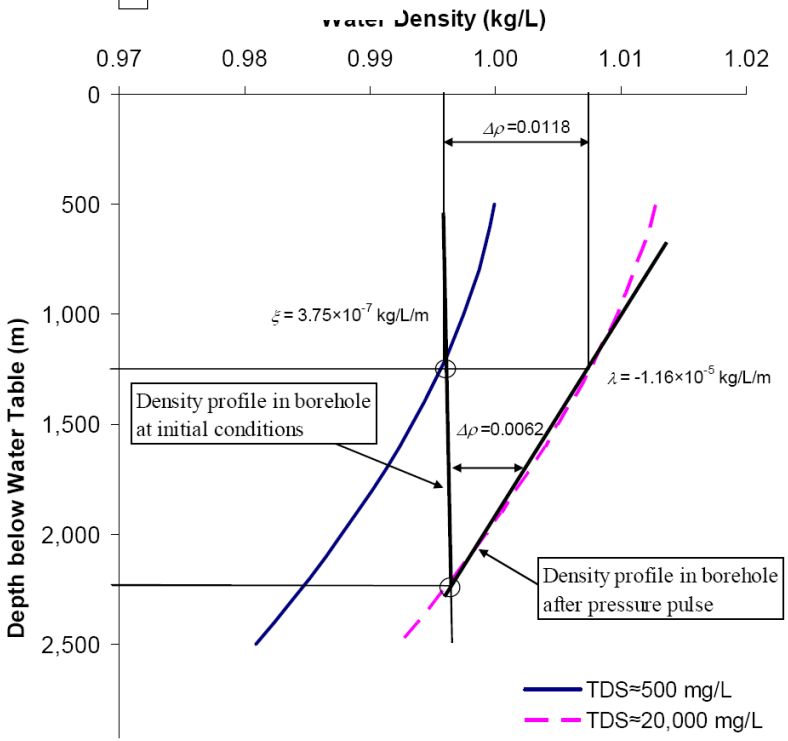

Parameter
Top of injection Fm. (m) z_v
Base of USDW (m) z_I
Injection Fm. TDS (g.L^{-1})
Borehole range of salinity (g.L^{-1})
Density gradient λ at constant TDS (kg.L^{-1}.m^{-1})
Initial density gradient ξ in borehole (kg.L^{-1}.m^{-1})
Final density difference at base of USDW (kg.L^{-1})
Maximum admissible pressure (bar)
Distance from injection well (km)

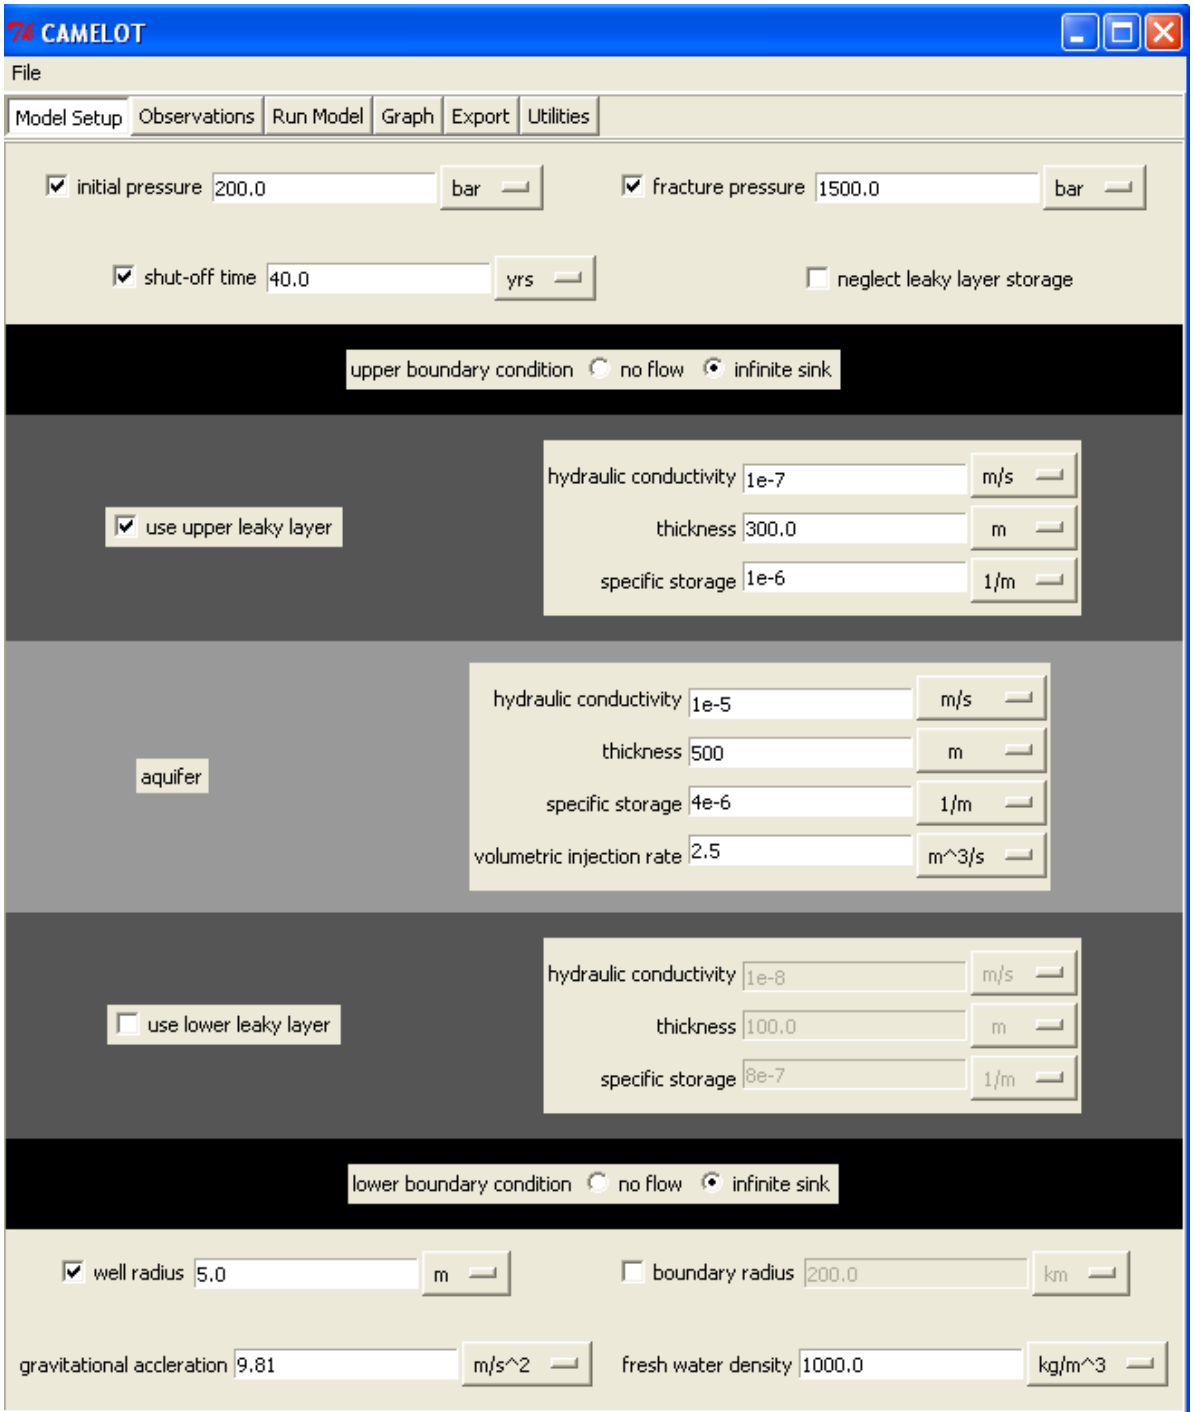

CAMELOT

(Karl Bandilla, 2010)

-Theis, Hantush-Jacob, Moench, Zhou (Fortran)

-ECO2N EOS utilities

- Python solvers

- Tkinter interface

Hypothetical Case Study Illinois Basin

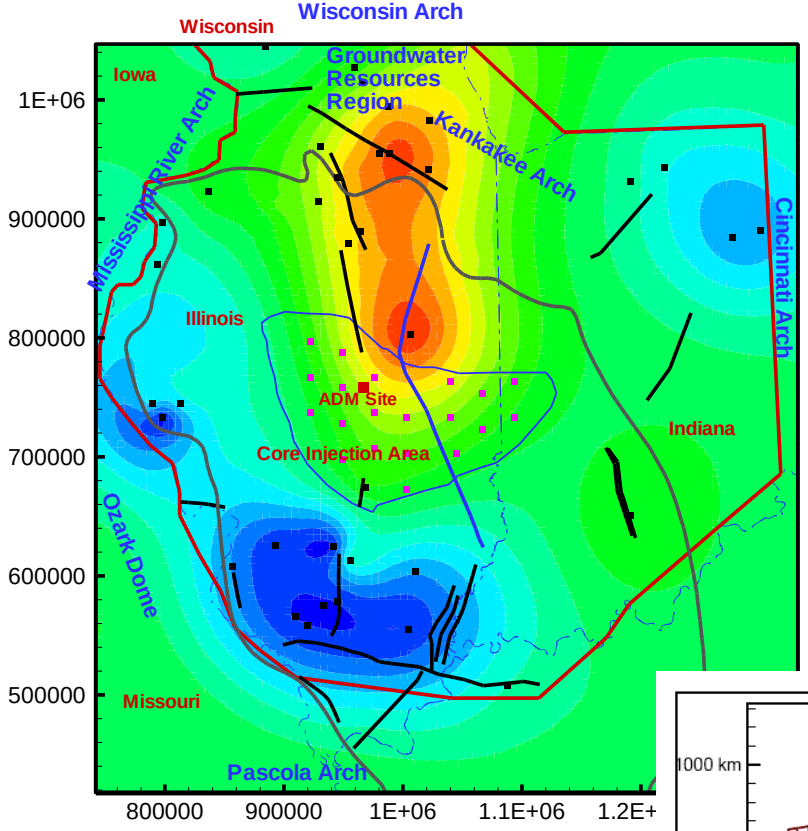



Thickness Mt. Simon (m)

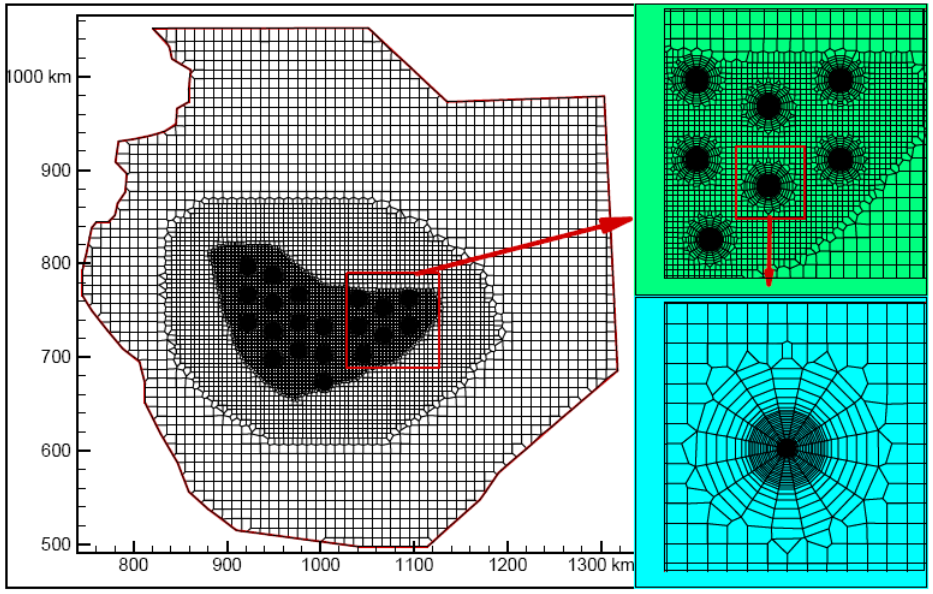

TOUGH2/ECO2N supercomputer

Jens Birkholzer, Quanlin Zhou, LBNL

Zhou et al., 2009, Ground Water

Birkholzer, Zhou, 2009, IJGHGC

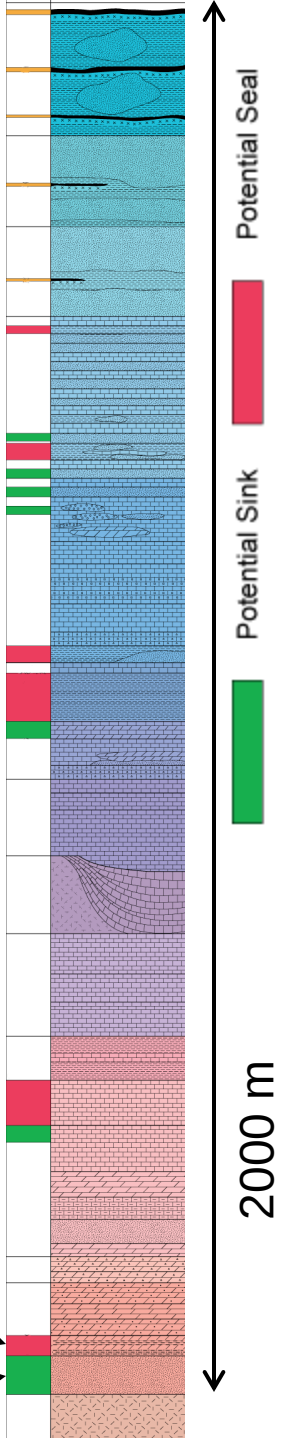

Eau Claire seal

Mt. Simon Sandstone

Pressure fronts are basin scale, CO_2 fronts are local scale

Chicago

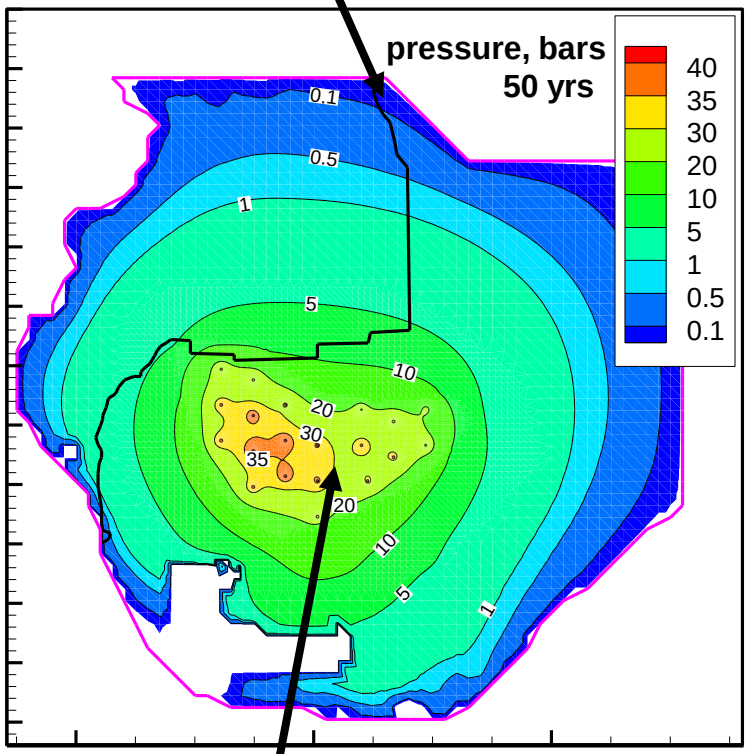

FutureGen, Mattoon, IL

CO_2 saturation at 50 yrs

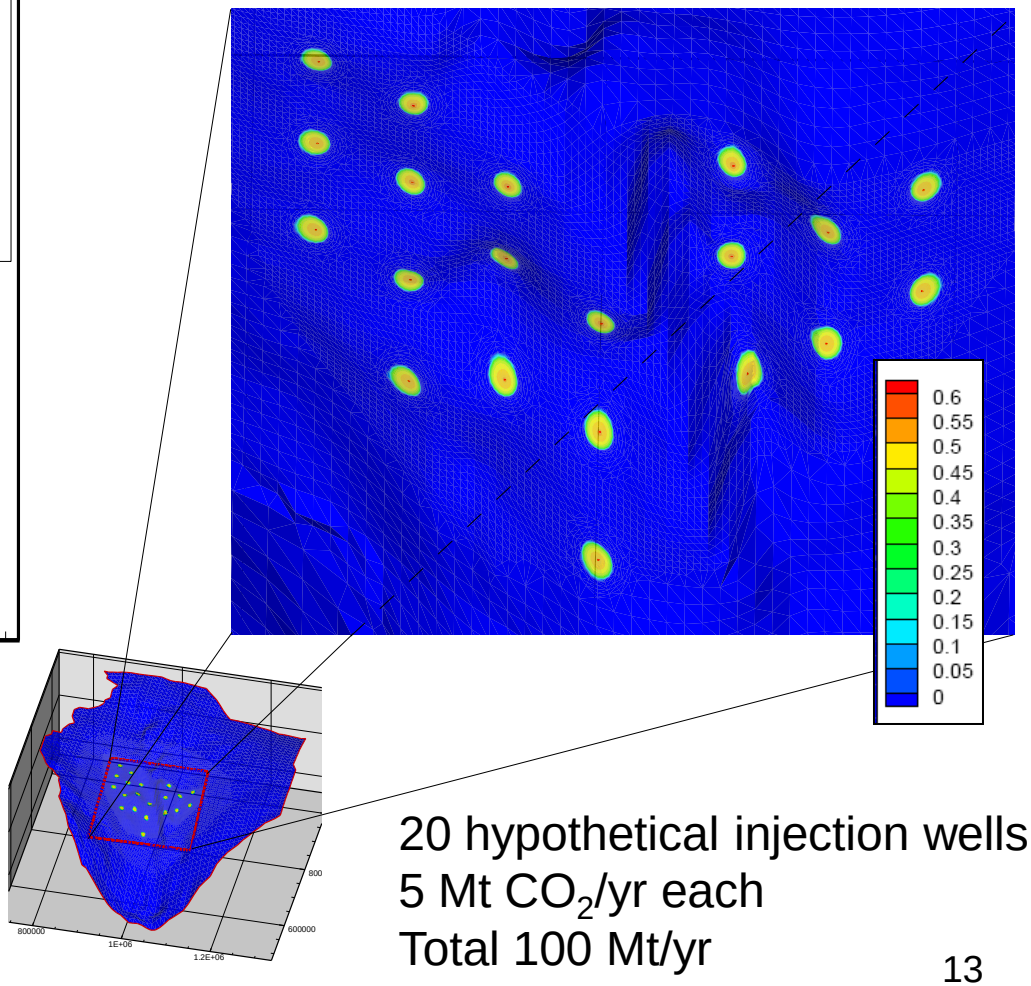

20 hypothetical injection wells
5 Mt CO_2/yr each
Total 100 Mt/yr

Zhou, Birkholzer, LBNL

Pressure influence

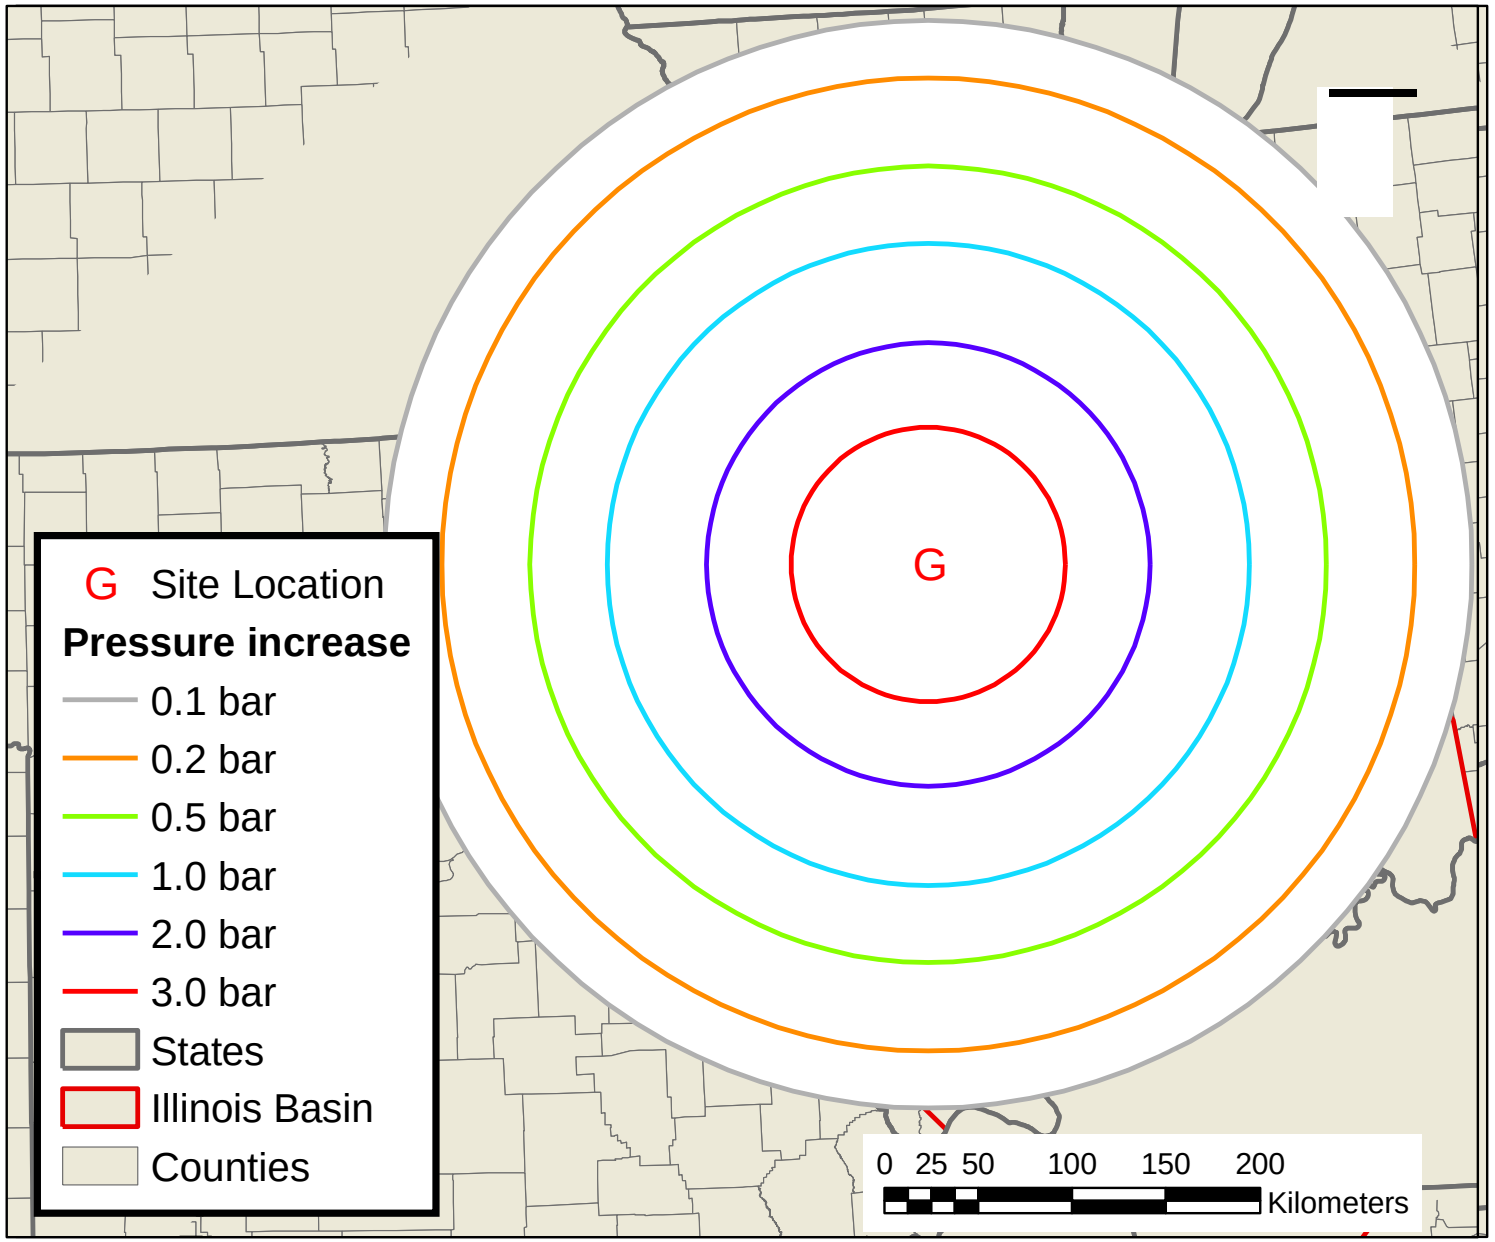

100 yrs
50 yrs

CAMELOT
Moench
solution

AoR web interface

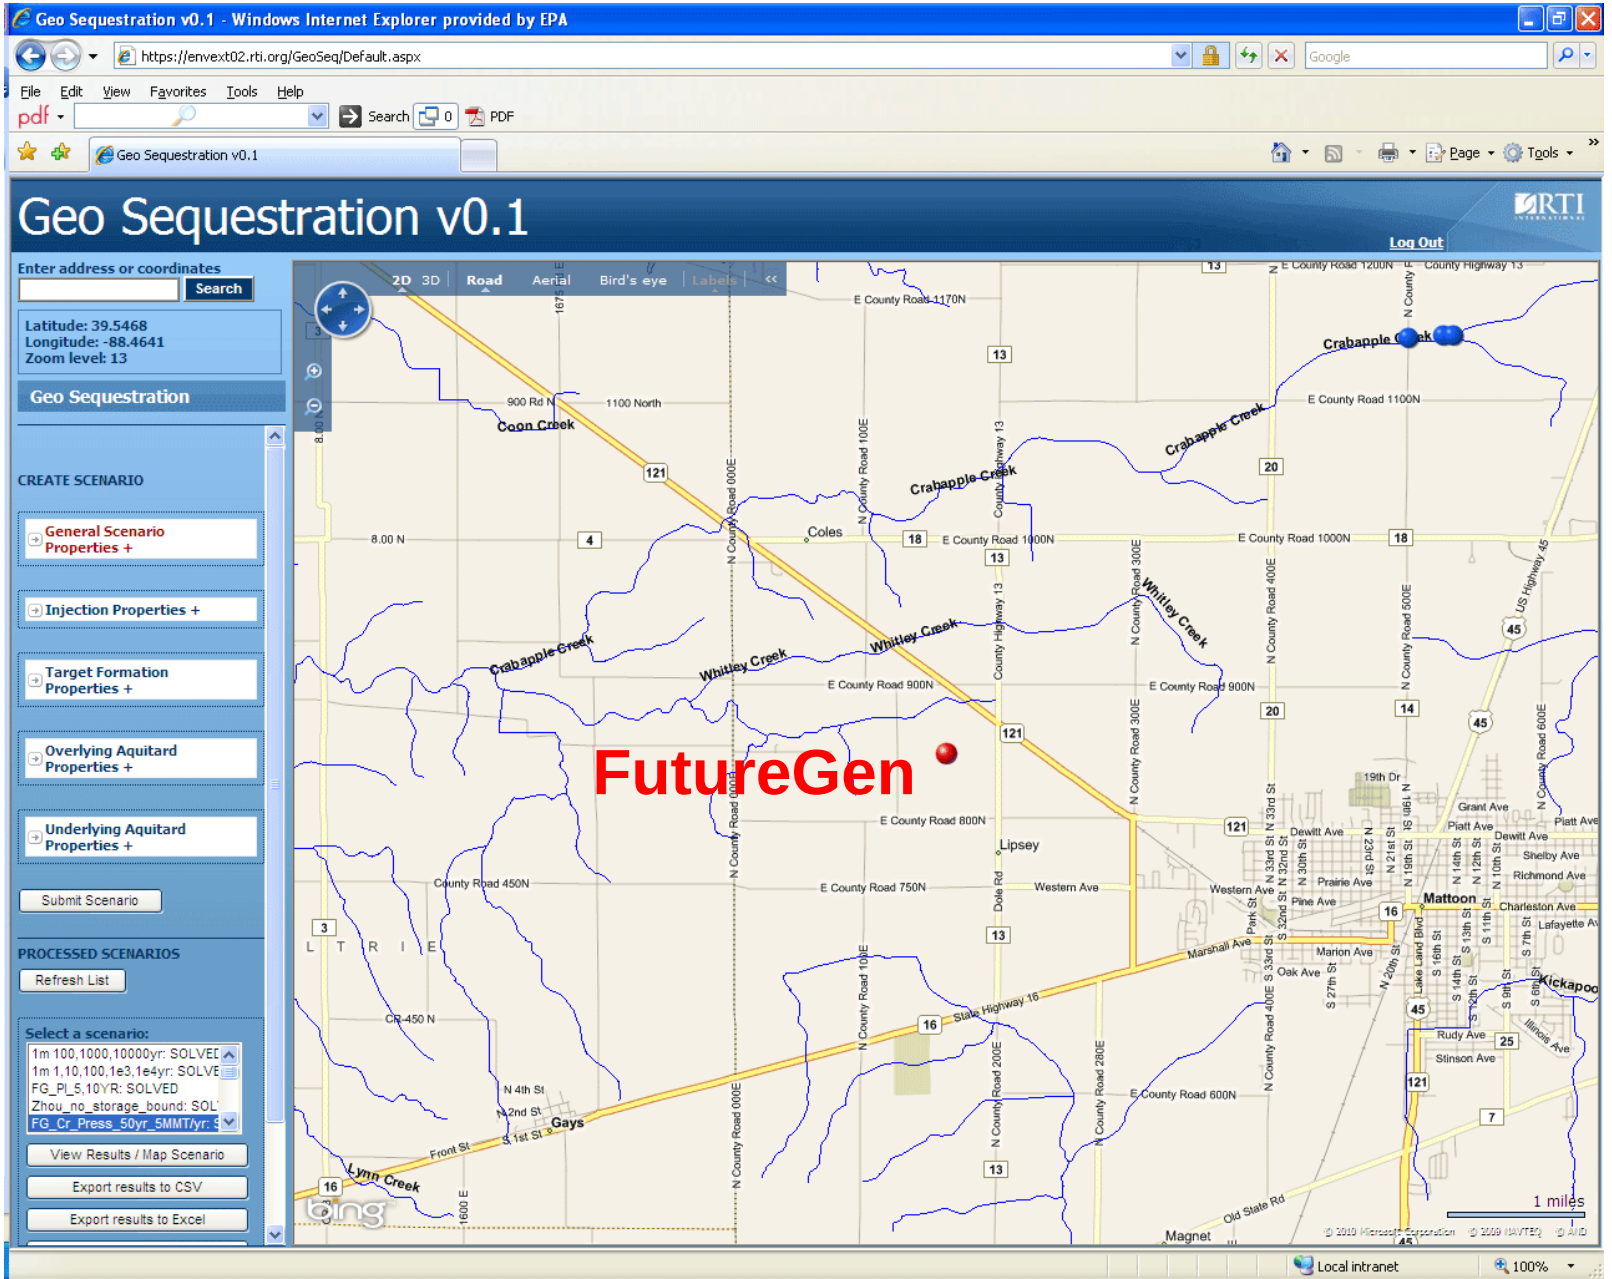

Data source:DOE/EIS-0394, 2007

Pressure influence –

hypothetical 5 MMt/yr CO_2 injection, 50 yrs

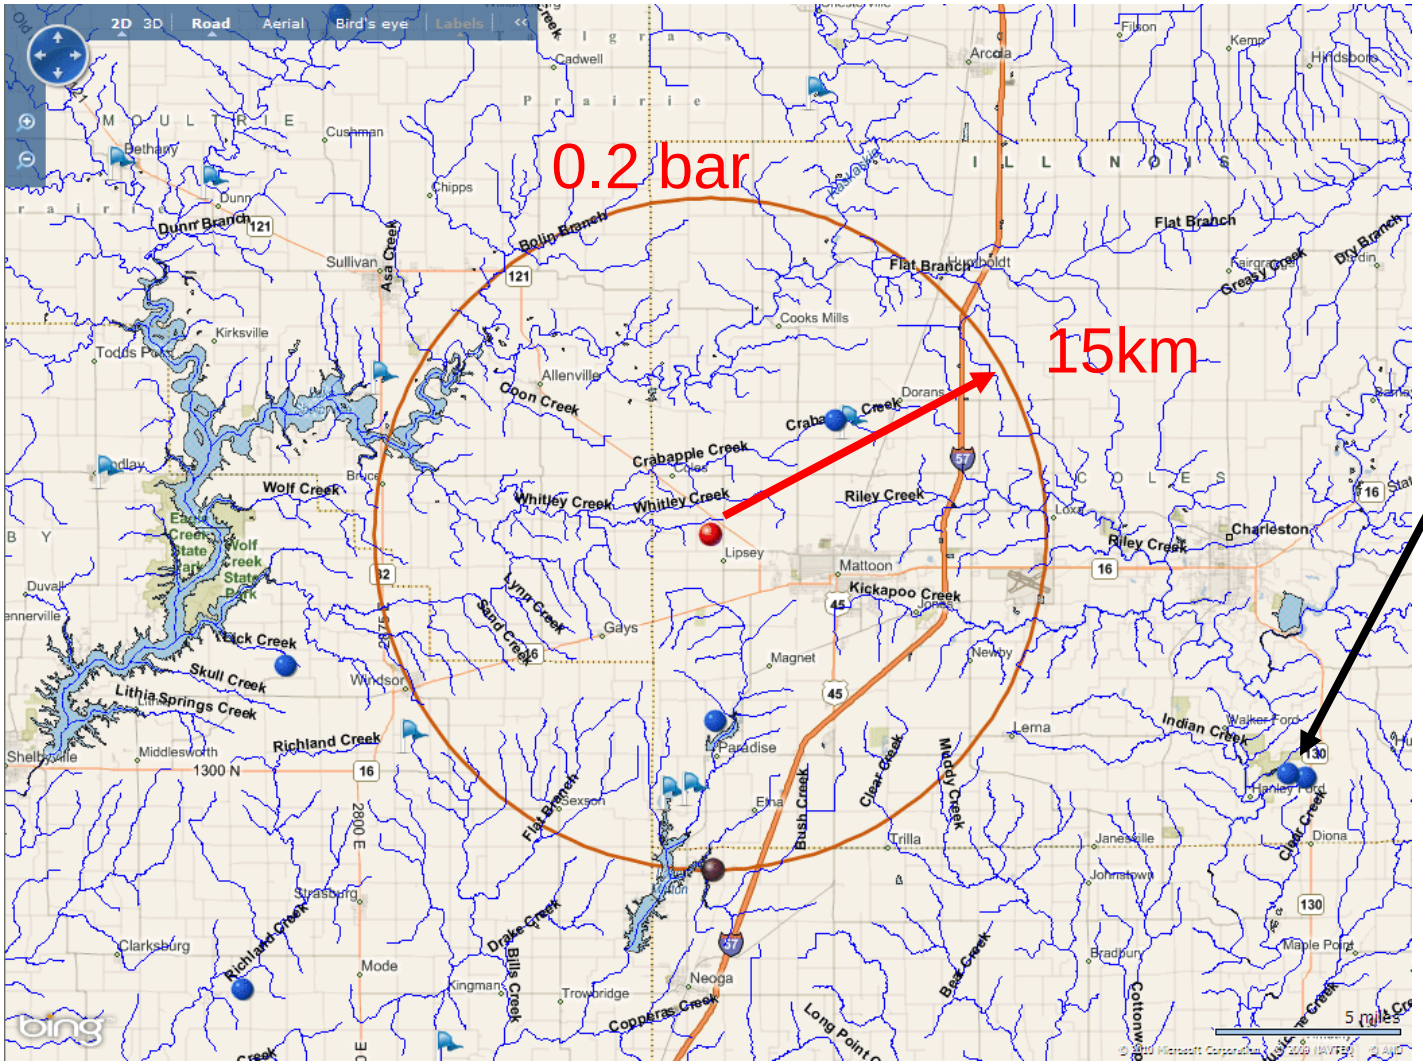

Test problem : critical pressure simple

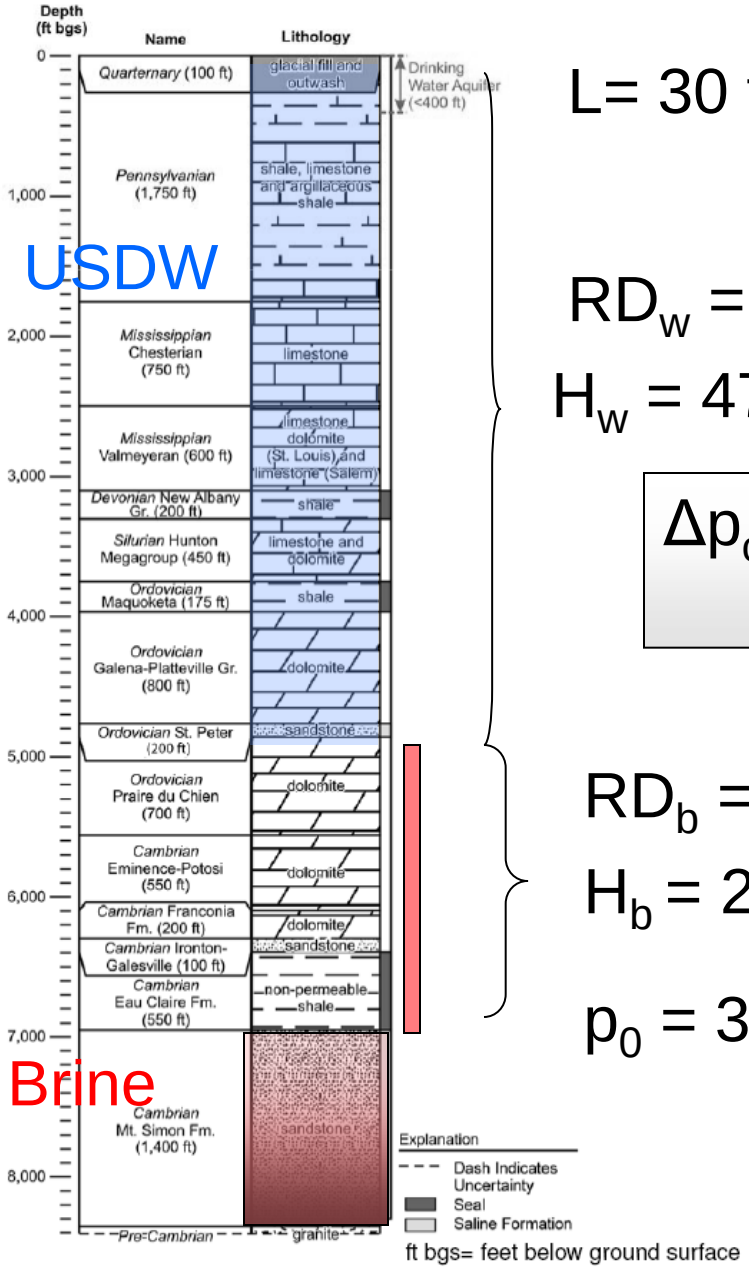

USDW

Brine

L= 30 ft

$RD_w = 0.998$ **(assume TDS 10,000 *mg/l*)**

$H_w = 4770$ ft

$$\Delta p_c = (H_w * RD_w + H_b * RD_b) * 0.433 \text{ psi/ft} - p_0$$

$RD_b = 1.09$ **(assume TDS brine approx 140,000 *mg/l*)**

$H_b = 2200$ ft

$p_0 = 3031$ psi **(assuming hydrostatic 0.433 psi/ft @ 7000 ft)**

$$\Delta p_c = 3080 - 3031 = 49.4 \text{ psi (3.4 bar)}$$

Critical Pressure –

hypothetical 5 MMt/yr CO_2 injection, 50 yrs

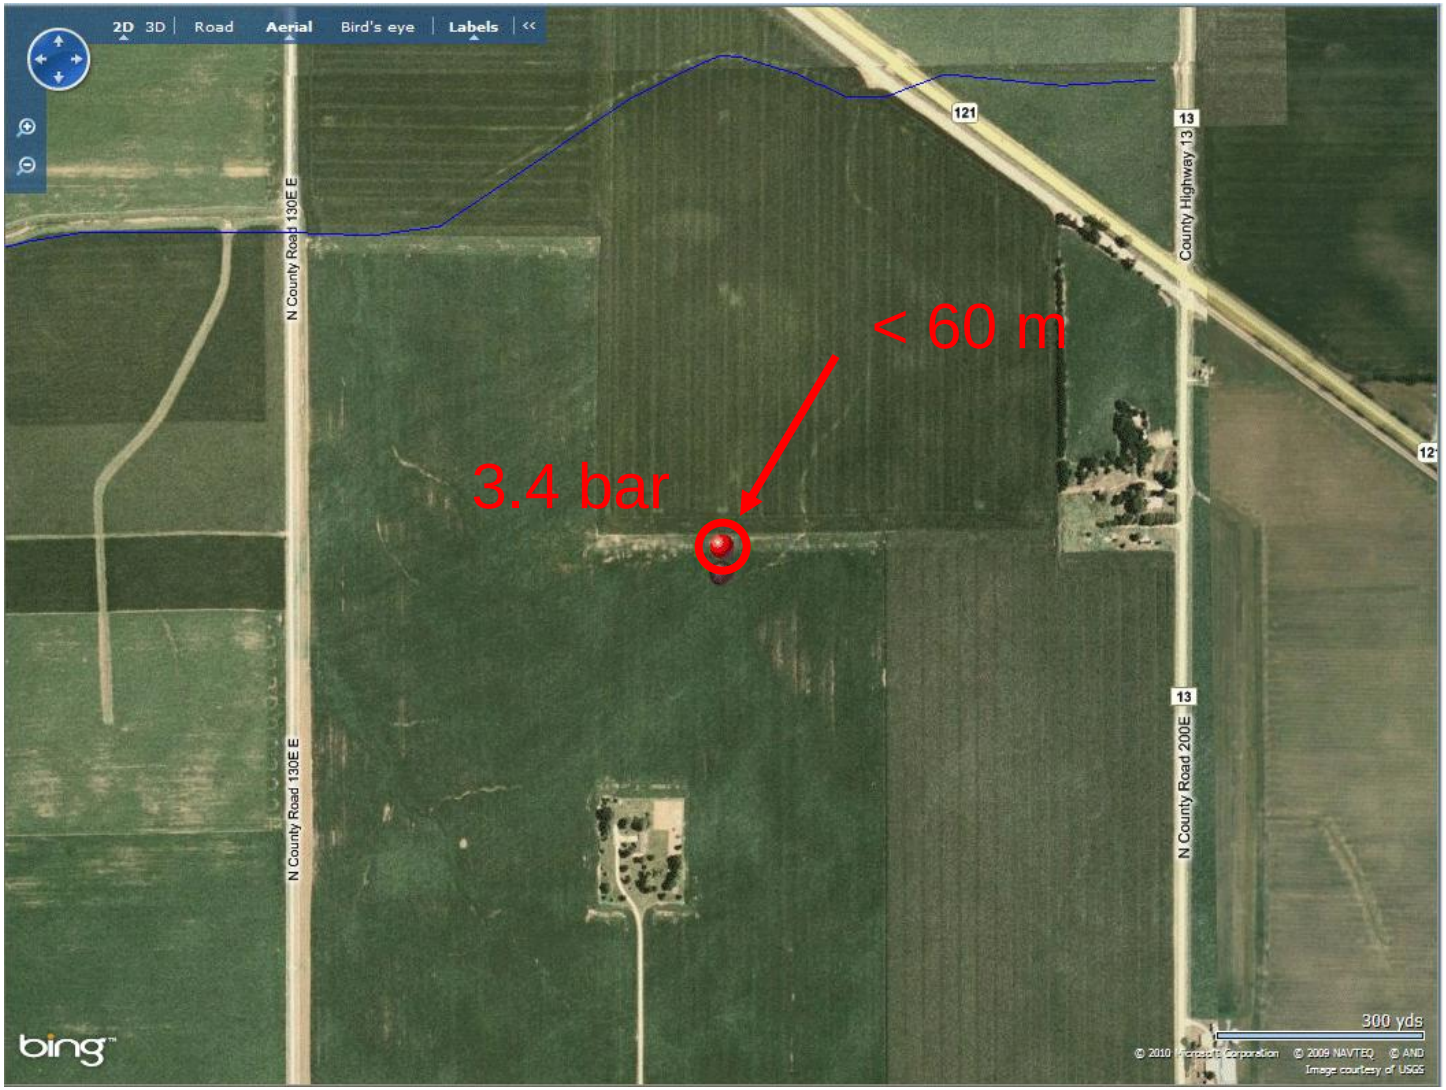

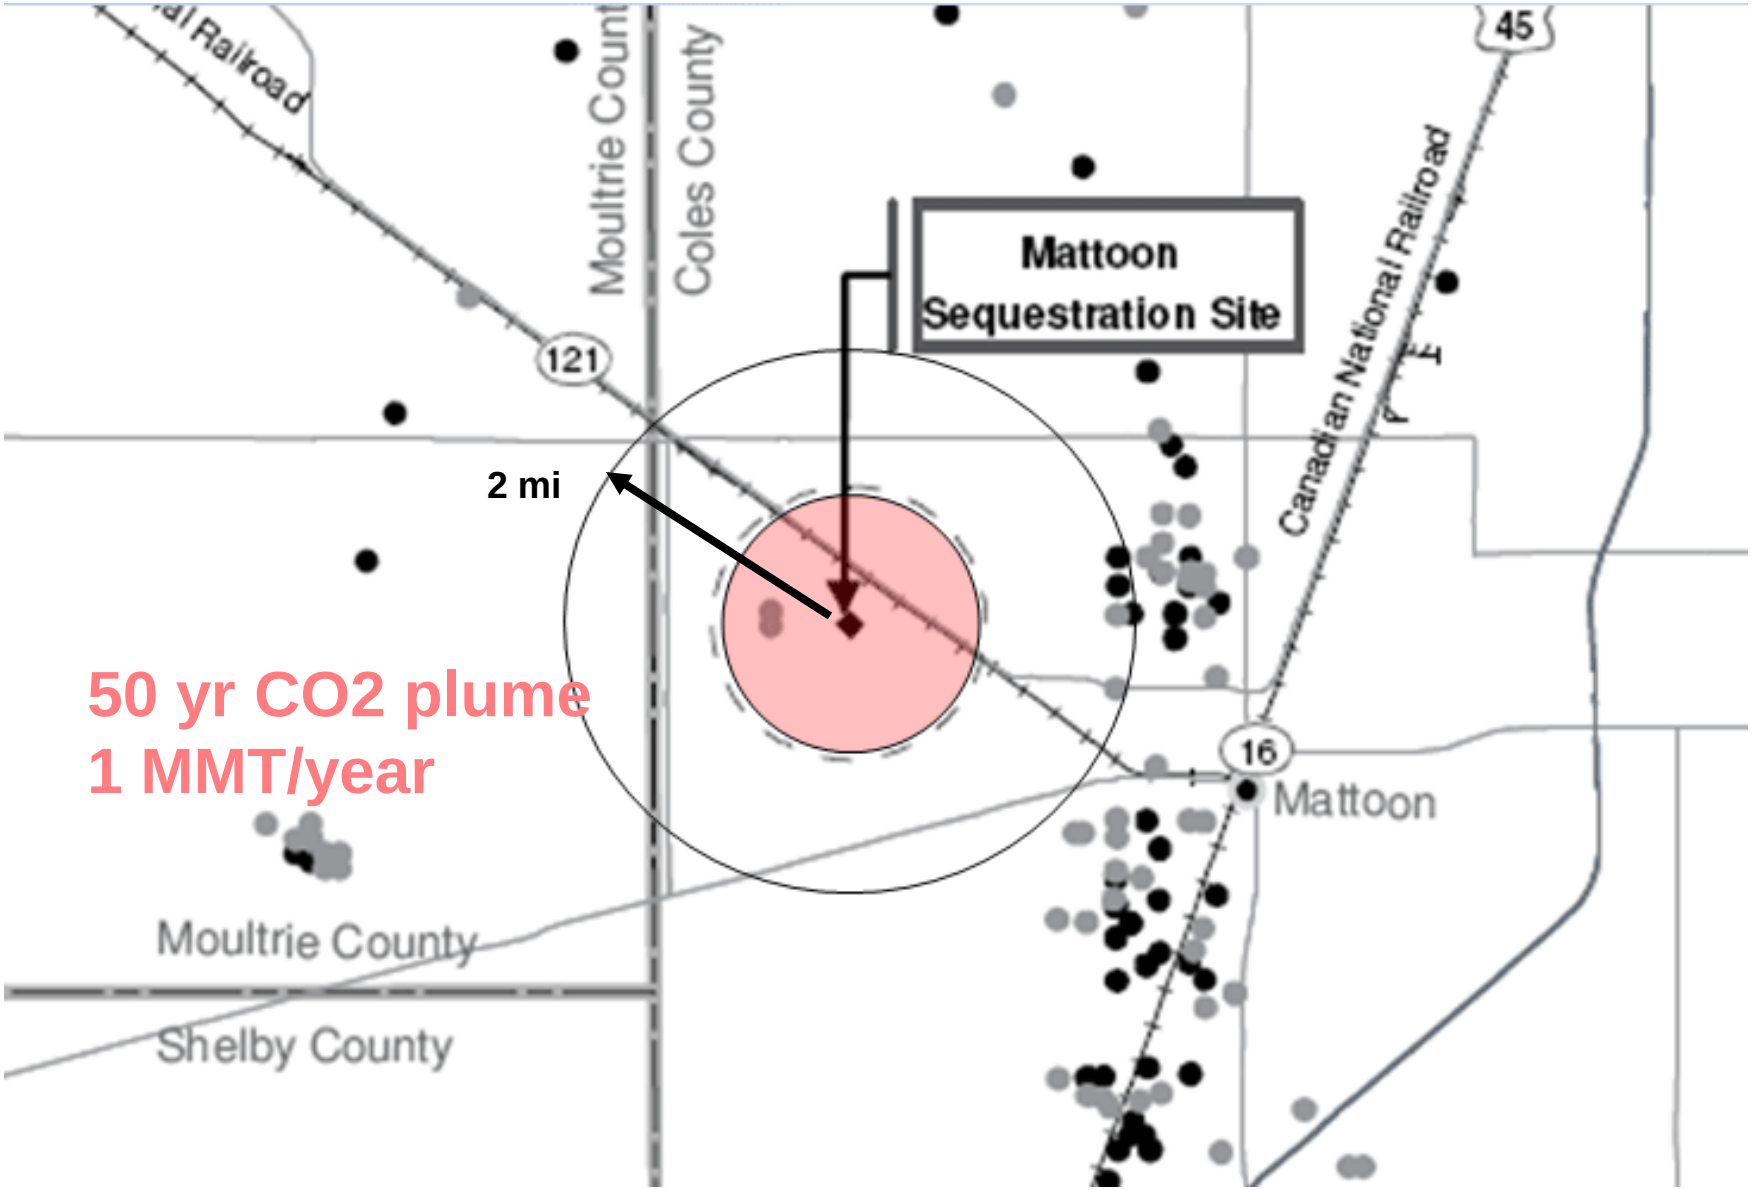

DOE/EIS-0394, 2007

Summary

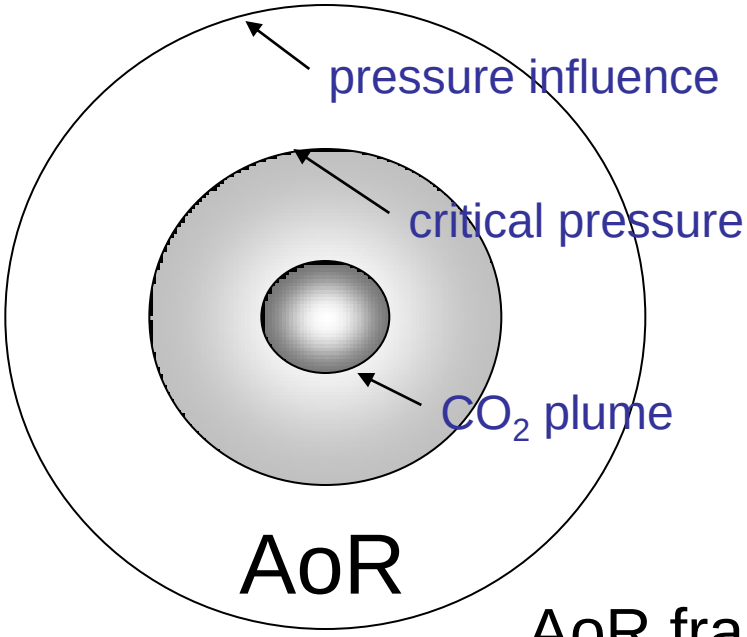

AoR solutions

- Camelot tool
  - Python solvers, Karl Bandilla
  - pressure influence, Theis, Hantush-Jacob, Moench,Zhou
- working on, critical pressure, LBNL
- working on, CO_2 front, Princeton

AoR frameworks

- GeoSequestration tool (web-based)
  - Bing maps, RTI
- working on BAEM, analytic element solutions, Mark Bakker
  - MapWindow GIS (desktop), Dan Ames
- working on, uncertainty analysis, Justin Babendreier,
  -EPA SuperMUSE, FRAMES

AoR testing

- TOUGH2/ECO2N (LBNL)
  - FutureGen, Mattoon, IL
- possible Kimberlina, CA

Acknowledgements

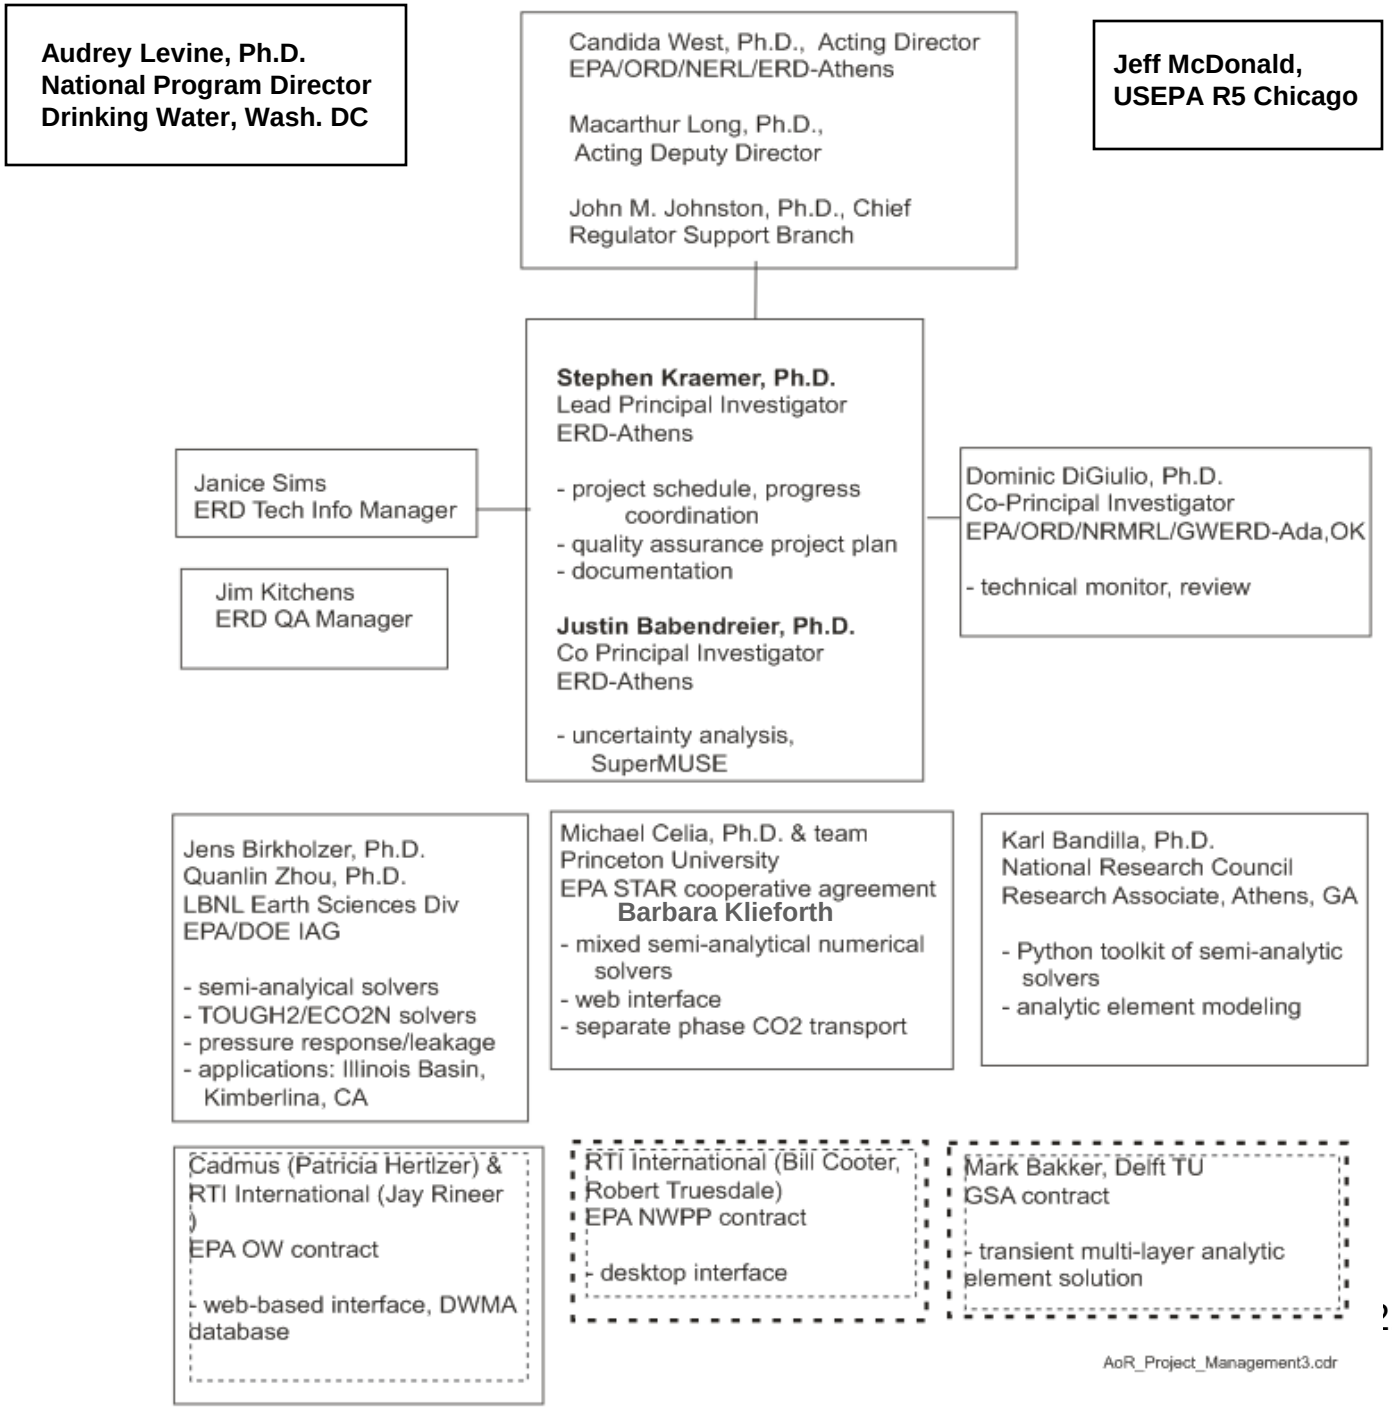

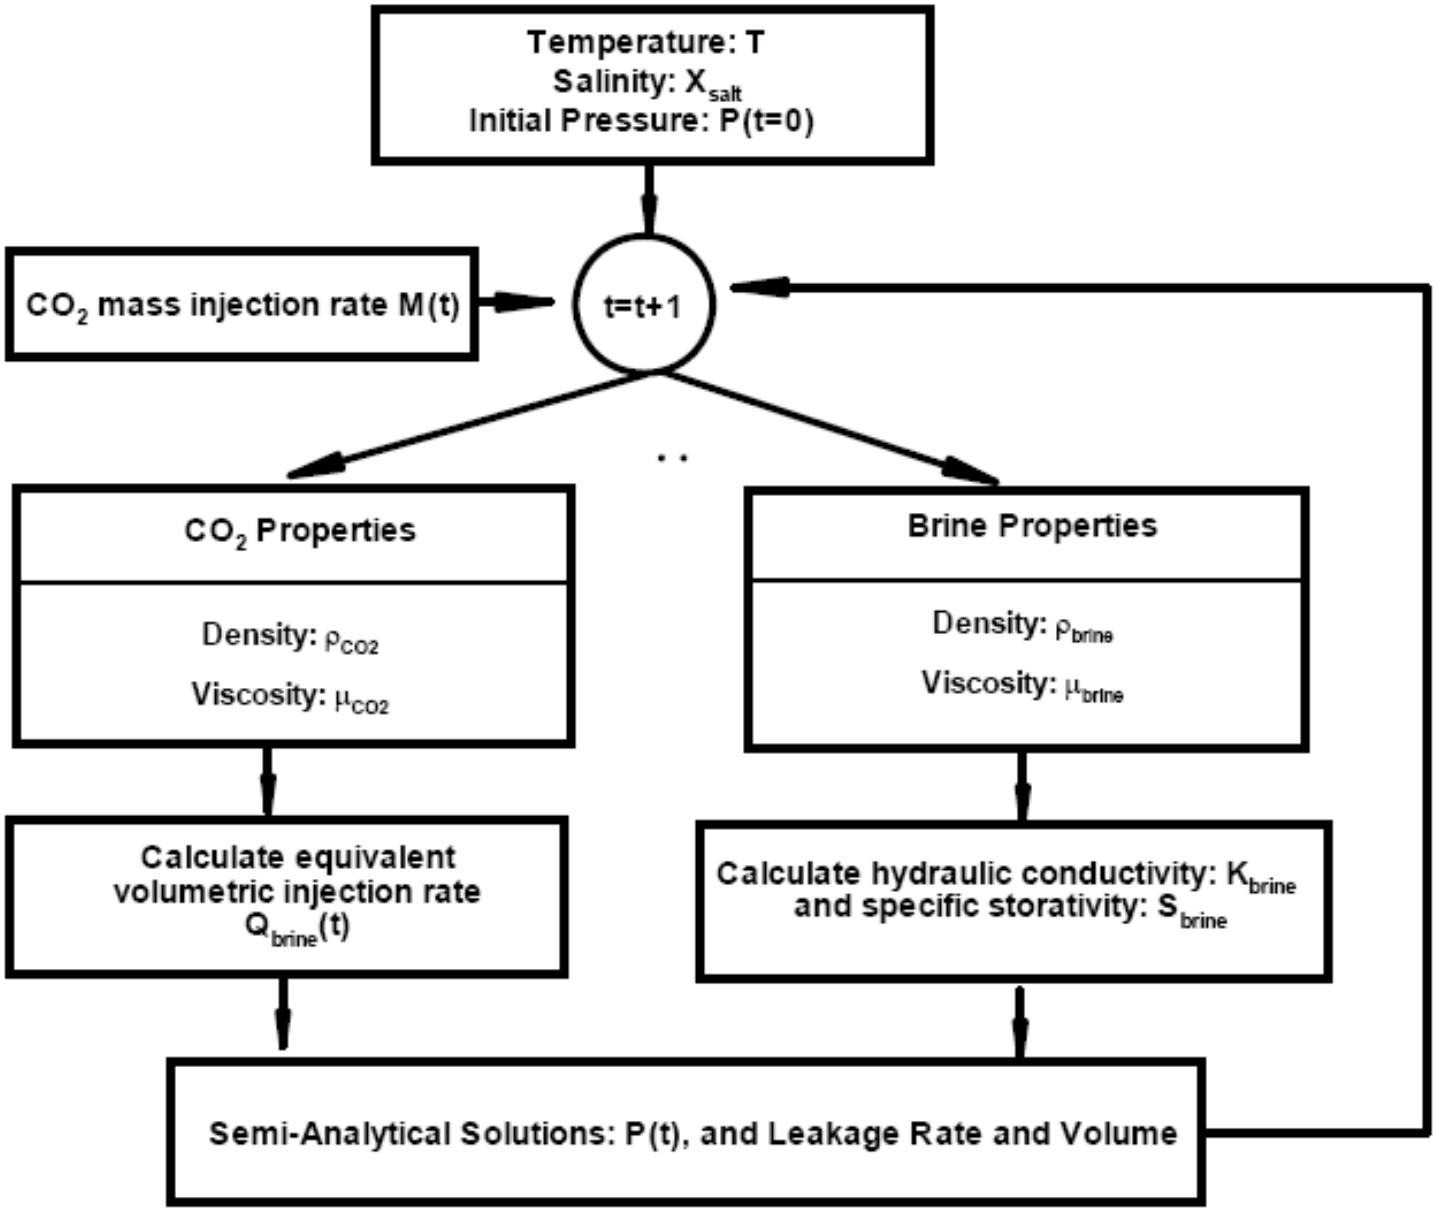
Temperature: T
Salinity: X_{salt}
Initial Pressure: P(t=0)
CO_2 mass injection rate M(t)
t=t+1
CO_2 Properties
Density: ρ_{CO2}
Viscosity: μ_{CO2}
Brine Properties
Density: ρ_{brine}
Viscosity: μ_{brine}
Calculate equivalent volumetric injection rate $Q_{brine}(t)$
Calculate hydraulic conductivity: K_{brine} and specific storativity: S_{brine}
Semi-Analytical Solutions: P(t), and Leakage Rate and Volume

ECO2N

Clients Map

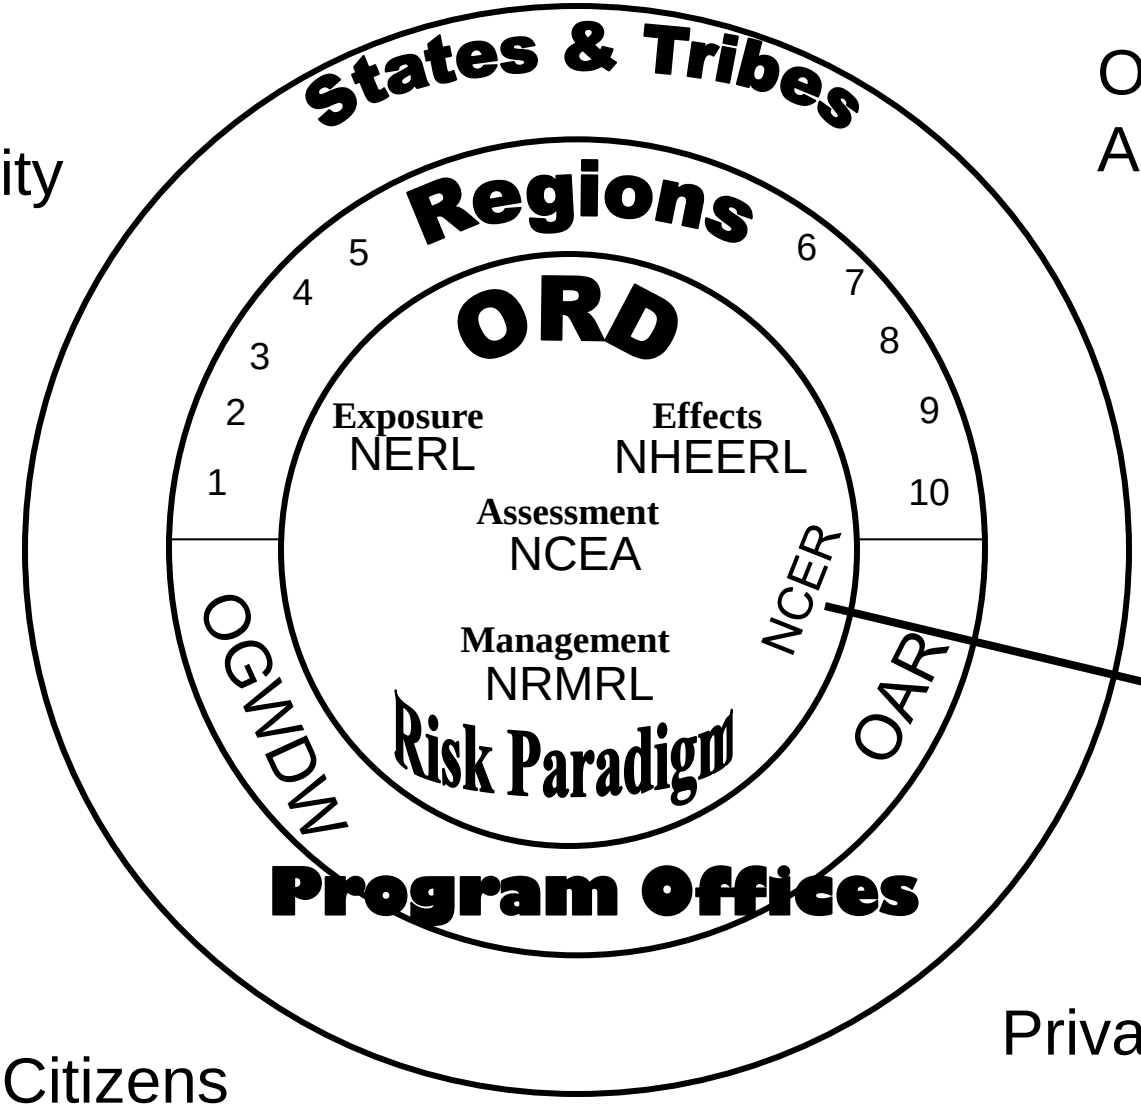

Environ. Community

Other Fed Agencies

NGOs

Academic community

Private Citizens

Private Industry

EPA Research Map

Safe Drinking Water Act

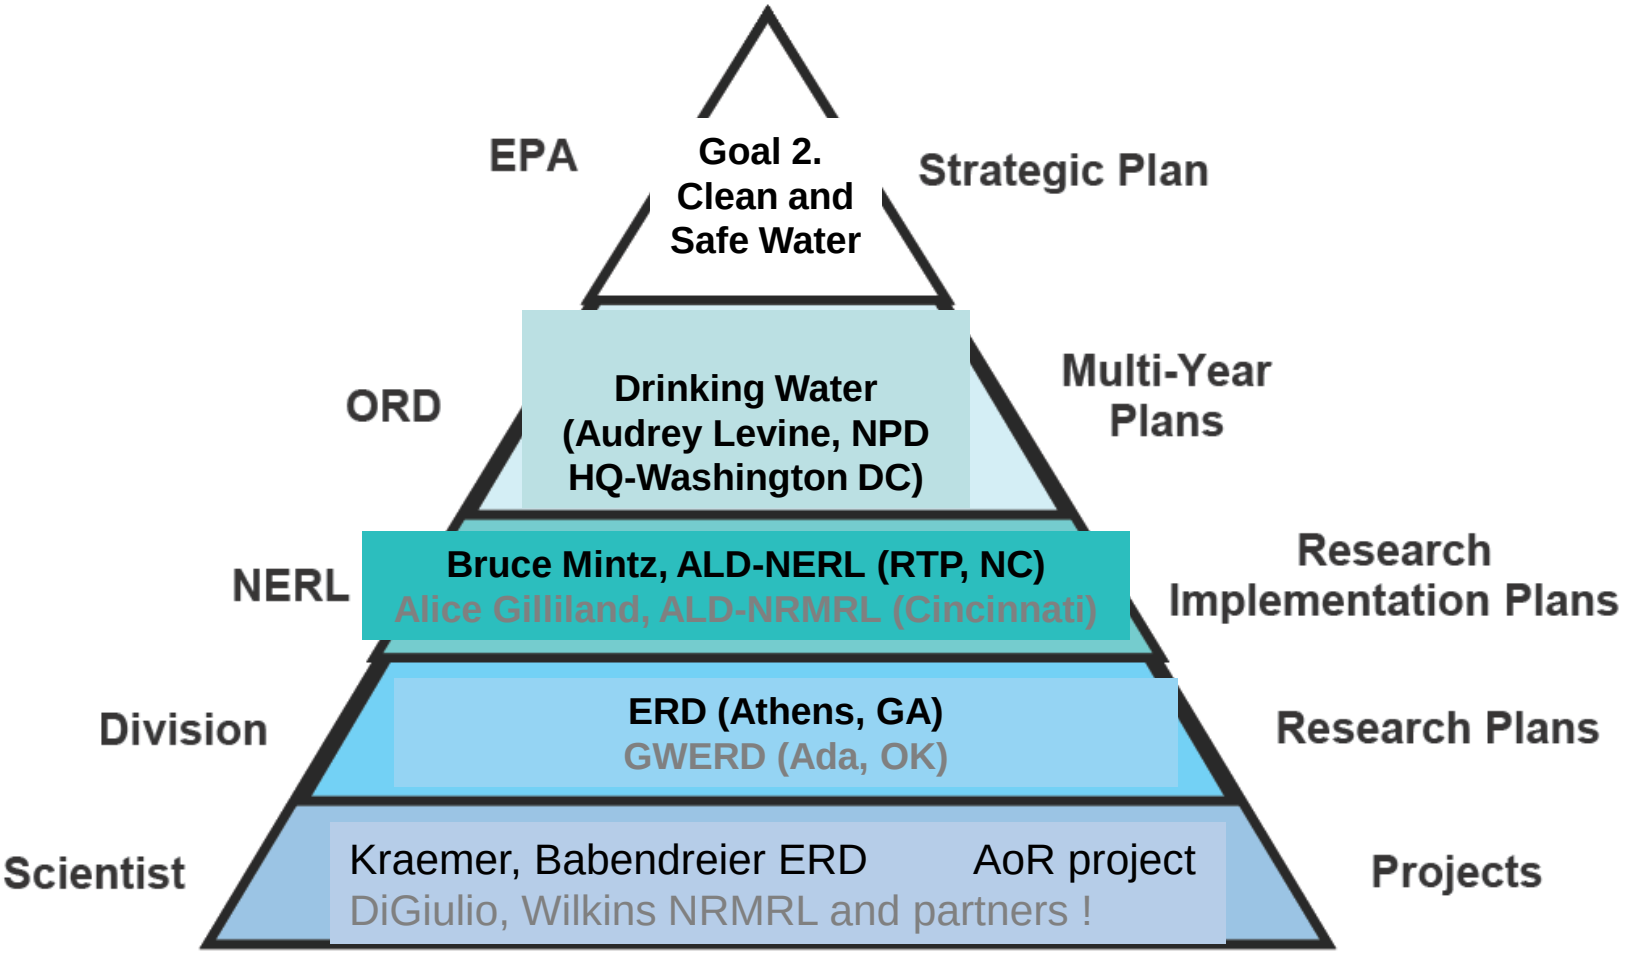

Critical Pressure FutureGen

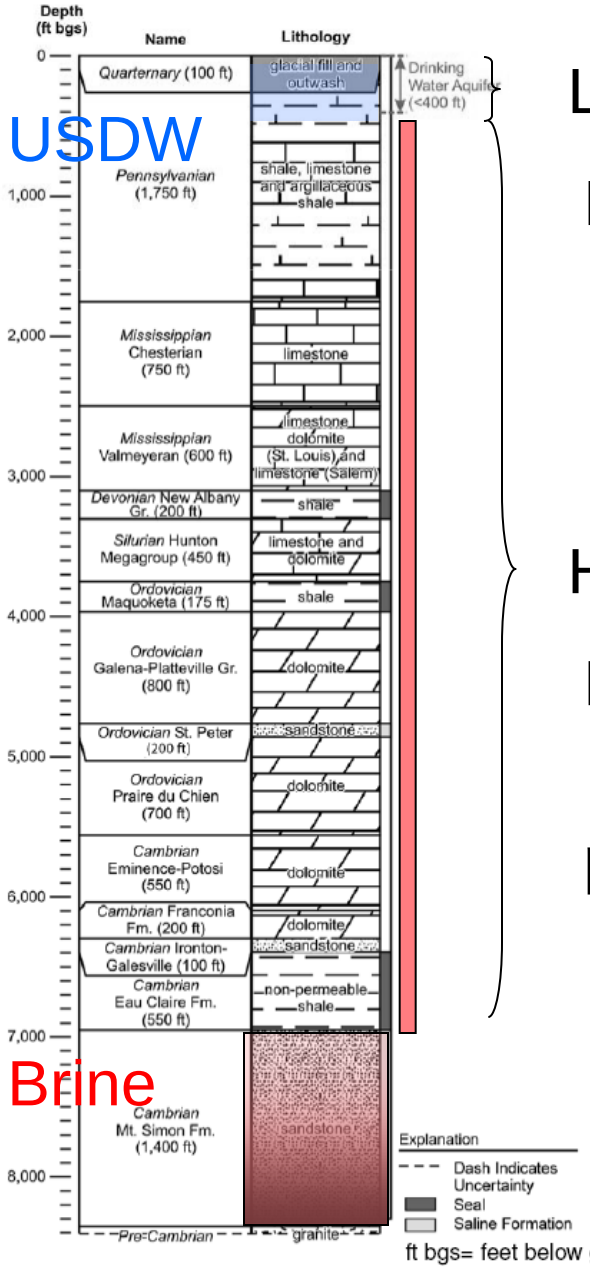

L= 30 ft H_w = 370 ft

$RD_w = 1.0$

$$\Delta p_c = (H_w * RD_w + H_b * RD_b) * 0.433 \text{ psi/ft} - p_0$$

H_b = 6,600 ft

$RD_b = 1.07$ **(assume TDS brine approx 140,000 *mg/l*)**

p_0 = 3031 psi **(assuming hydrostatic 0.433 psi/ft @ 7000 ft)**

$$\Delta p_c = 3218 - 3031 = 187 \text{ psi (12.89 bar)}$$