



NETL Life Cycle Inventory Data

Process Documentation File

UF6 (enriched) [Intermediate products]

Amount of enriched uranium required for operation of the fuel fabrication facility

Tracked Output Flows:

UO2 (fuel assembly) [Intermediate products]

Uranium dioxide fuel assembly

Section II: Process Description

Associated Documentation

This unit process is composed of this document and the data sheet (DS) *DS_Stage1_O_Fuel_Fabrication_Facility_2010.01.xls*, which provides additional details regarding relevant calculations, data quality, and references.

Goal and Scope

The scope of this unit process encompasses the materials and weights of those materials necessary to operate a fuel fabrication facility, to assemble uranium fuel rods into the form needed for use in nuclear power plants. The process is based on the reference flow of 1 kg of UO₂ (fuel assembly), as described below and shown in **Figure 1**. Usage of electricity, natural gas, and water are quantified.

Boundary and Description

Fuel fabrication begins with receipt of uranium hexafluoride (UF₆) from an enrichment plant. The UF₆ is transported in solid form to the fuel fabrication facility, where it is heated to a gas and chemically processed to form uranium dioxide (UO₂) powder. The UO₂ powder is then pelletized, sintered into ceramic form, loaded into tubes, and constructed into fuel assemblies.

The constructed fuel assembly has differing dimensions and contains different quantities of fuel rods depending on the reactor in which it is used. This diversity is not captured in the modeled fuel assembly process. Rather, operation of a generic fuel assembly plant is based on inputs and outputs provided in the "Energy Technology Characterizations Handbook" (ETCH 1983). These data include energy demands during operation of the facility, chemical inputs and emissions from the use of the energy and the chemical transformations.

Figure 1 provides an overview of the boundary of this unit process. Rectangular boxes represent relevant sub-processes and upstream unit processes that are documented separately, while trapezoidal boxes indicate upstream data that are outside of the boundary of this unit process. As shown, upstream emissions associated with the production and delivery of electricity and natural gas are accounted for outside of the

boundary of this unit process, based on proprietary profiles available within the GaBi model.

Table 1 shows relevant production values of the entire facility. **Table 2** provides a summary of modeled input and output flows. Additional detail regarding input and output flows, including calculation methods, is contained in the associated DS sheet.

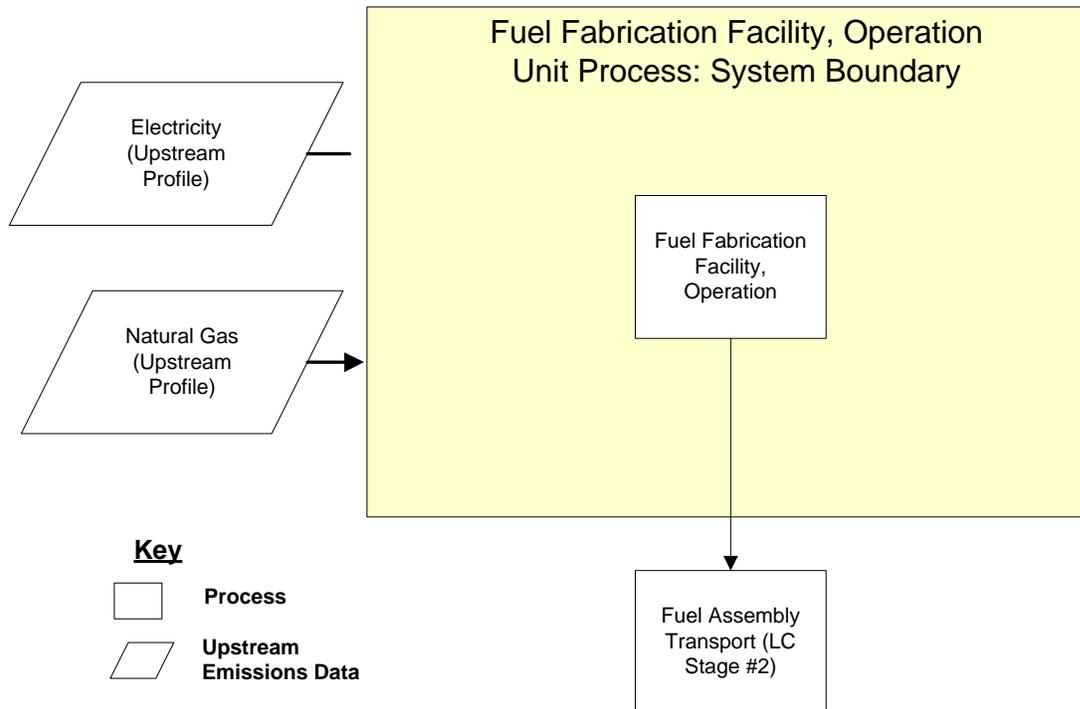


Figure 1. Unit Process Scope and Boundary

Table 1: Properties of Process

Material	Value	Reference
Uranium Dioxide Annual Output	900,000 kg	ETCH 1983
Enriched Uranium Hexafluoride Annual Input	3,080,000 kg	ETCH 1983
Electricity Annual Input	4.89×10^{-2} MWh	ETCH 1983
Natural Gas Annual Input	2.60×10^6 m ³	ETCH 1983

Table 2: Unit Process Input and Output Flows

Flow Name	Value	Units (Per Reference Flow)
Inputs		
Natural gas USA [Natural gas (resource)]	2.89E+00	m ³ / kgUO ₂
Power [Electric power]	4.89E-02	MWh/ kgUO ₂
UF ₆ (enriched) [Intermediate products]	3.42E+00	kg/ kgUO ₂
Water (ground water) [Water]	5.67E+02	L/ kgUO ₂
Outputs		
UO ₂ (fuel assembly) [Intermediate products]	1.00E+00	kg
Ammonia [Inorganic emissions to fresh water]	2.89E-01	kg/ kgUO ₂
Calcium Fluoride [Emissions to industrial soil]	7.49E-01	kg/ kgUO ₂
Carbon monoxide [Inorganic emissions to air]	6.22E-03	kg/ kgUO ₂
Fluoride [Inorganic emissions to fresh water]	1.22E-01	kg/ kgUO ₂
Nitrate [Inorganic emissions to fresh water]	6.87E-01	kg/ kgUO ₂
Nitrogen oxides [Inorganic emissions to air]	1.78E-01	kg/ kgUO ₂
Sulphur dioxide [Inorganic emissions to air]	6.87E-01	kg/ kgUO ₂
Thorium (Th234) [Radioactive emissions to fresh water]	1.07E-08	Bq/ kgUO ₂
Uranium [Radioactive emissions to fresh water]	2.10E-08	Bq/ kgUO ₂
Uranium [Radioactive emissions to industrial soil]	2.43E-07	Bq/ kgUO ₂
Uranium (U235) [Radioactive emissions to air]	2.10E-10	Bq/ kgUO ₂

* **Bold face** clarifies that the value shown *does not* include upstream environmental flows. Upstream environmental flows were added during the modeling process using GaBi modeling software, as shown in Figure 1.

Embedded Unit Processes

None.

References

ETCH 1983 The Aerospace Corporation and Mueller Associates, Inc. 1983. Energy Technology Characterizations Handbook. Department of Energy. Washington, D.C.

Section III: Document Control Information

Date Created: October 28, 2010
Point of Contact: Timothy Skone (NETL), Timothy.Skone@NETL.DOE.GOV
Revision History:
Original/no revisions

How to Cite This Document: This document should be cited as:

NETL (2010). *NETL Life Cycle Inventory Data – Unit Process: Fuel Assembly Facility, Operation*. U.S. Department of Energy, National Energy Technology Laboratory. Last Updated: November 2010 (version 01). www.netl.doe.gov/energy-analyses (<http://www.netl.doe.gov/energy-analyses>)

Section IV: Disclaimer

Neither the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) nor any person acting on behalf of these organizations:

- A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe on privately owned rights; or
- B. Assumes any liability with this report as to its use, or damages resulting from the use of any information, apparatus, method, or process disclosed in this document.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by NETL. The views and opinions of the authors expressed herein do not necessarily state or reflect those of NETL.