



NETL Life Cycle Inventory Data

Process Documentation File

Process Name: Transmission reciprocating compression
Reference Flow: 1 kg of natural gas
Brief Description: Transmission compression, including fuel used by reciprocating compressor drivers and venting from reciprocating compressors.

Section I: Meta Data

Geographical Coverage: United States **Region:** United States
Year Data Best Represents: 2016
Process Type: Basic Process (BP)
Process Scope: Gate-to-Gate Process (GG)
Allocation Applied: No
Completeness: All Relevant Flows Captured
Flows Aggregated in Data Set:
 Process Energy Use Energy P&D Material P&D

Relevant Output Flows Included in Data Set:

Releases to Air: Greenhouse Gases Criteria Air Pollutants Other
Releases to Water: Inorganic Emissions Organic Emissions Other
Water Usage: Water Consumption Water Demand (throughput)
Releases to Soil: Inorganic Releases Organic Releases Other

Adjustable Process Parameters:

4_RECIP_CH4

[tonnes] Methane emissions from transmission reciprocating compressors.

4_NG_trans

[MCF] Annual natural gas processed at a transmission facility.

nat_mCH4

[dimensionless] Mass fraction of CH4 in natural gas.

4_RECIP_power

[hp] Operating reciprocating compressor horsepower at a transmission facility.

4_RECIP_time

[hours] Operating reciprocating compressor hours at a transmission facility.

Recip_thermalefficiency

[dimensionless] Thermal efficiency of reciprocating engines.

4_NG_trans_kg

[kg] Natural gas vented from reciprocating compressors.

Vent_NG

[kg] Natural gas vented from reciprocating compressors.

Compressor output_energy

[HPh] Output power rating of reciprocating engines, based on compressor rating and runtime.

Compressor_input_energy

[HPh] Input power requirement for reciprocating engines, based on compressor rating, runtime, and engine thermal efficiency.

Compressor input_fuel

[kg] Mass of natural gas fuel used by a transmission facility for reciprocating compression per unit of natural gas throughput. Converted from horsepower-hour to Btu (2544 Btu/HP-hr), from Btu to scf (1031 Btu/scf), from scf to lb (.042 lb/scf), and from lb to kg (2.205 lb/kg).

NG_processed

[kg] Mass of natural gas from processing per unit of natural gas exiting transmission.

Tracked Input Flows:**Natural gas [intermediate flow]**

[Intermediate flow] Processed natural gas input, including what ends up as marketed product and what is vented at transmission

Natural gas, combusted

[Process] Unit process for natural gas combustion emissions. Accounts for emissions only, not natural gas quantity, which is already accounted for in this unit process.

Tracked Output Flows:**Natural Gas [intermediate flow]**

Reference flow

Vent_NG [to venting and flaring]

[kg] Natural gas vented from reciprocating compressors.

Section II: Process Description

Associated Documentation

This unit process is composed of this document and the data sheet (DS) *DS_NG_Transmission_Compressor_Recip_2018.01.xlsx*, which provides additional details regarding relevant calculations, data quality, and references.

Goal and Scope

This unit process provides a summary of relevant input and output flows and associated emissions from transmission reciprocating compression, including fuels used by reciprocating compressor drivers and venting from reciprocating compressors. Natural gas (from the product stream) is the only fuel consumed; there are no other purchased fuels (e.g., diesel) or energy (e.g., electricity). Outputs include the reference flow (1 kg of natural gas exiting a transmission facility) and the quantity of gas vented from the compressor; gas vented from the compressor is sent to another NETL unit process for component speciation. The reference flow of this unit process is: 1 kg of natural gas

Boundary and Description

This unit process provides a summary of relevant input and output flows and associated emissions from transmission reciprocating compression, including fuels used by reciprocating compressor drivers and venting from reciprocating compressors. Natural gas (from the product stream) is the only fuel consumed; there are no other purchased fuels (e.g., diesel) or energy (e.g., electricity). Outputs include the reference flow (1 kg of natural gas exiting a transmission facility) and the quantity of gas vented from the compressor; gas vented from the compressor is sent to another NETL unit process for component speciation. The reference flow of this unit process is: 1 kg of natural gas

Figure 1: Unit Process Scope and Boundary

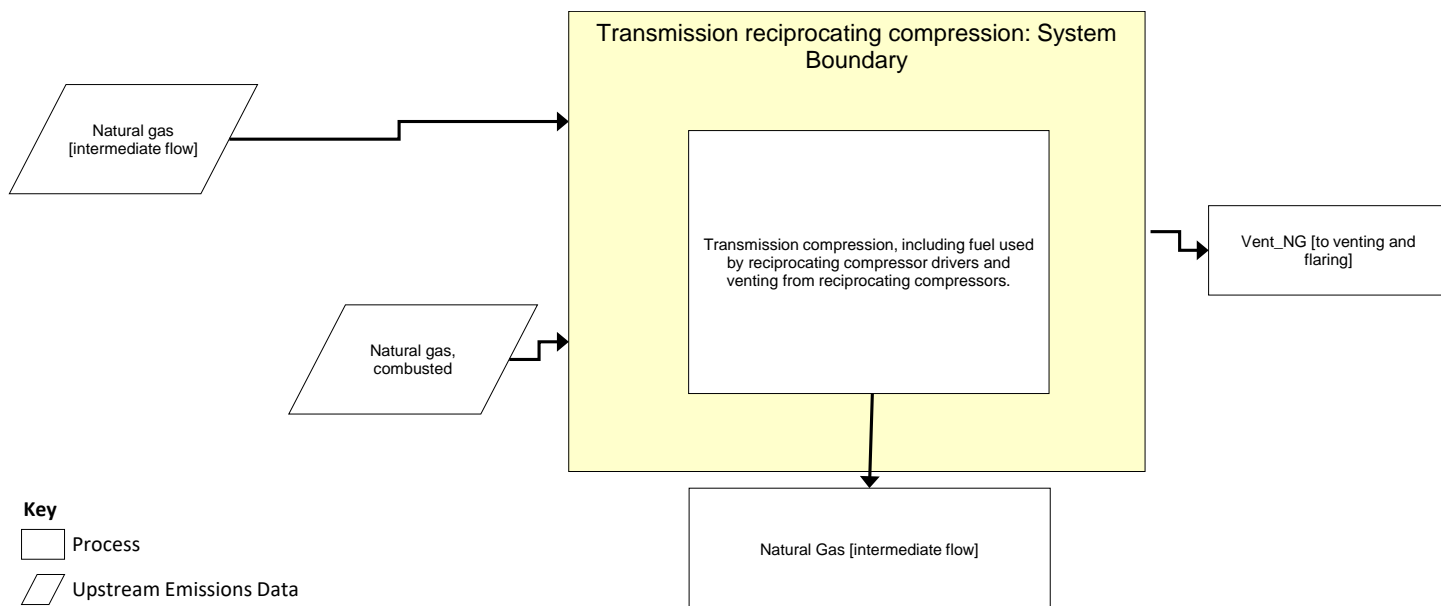


Table 1 shows the input parameters, which include emission factors and activity factors for the emission source, as well as natural gas processed at the transmission facility. The emission and activity factors are based on EPA's Greenhouse Gas Reporting Program (GHGRP) (EPA, 2016a) and EPA's Greenhouse Gas Inventory (GHGI) (EPA, 2018). The low, expected, and high bounds represent the variability in the underlying data and were developed via throughput-weighted statistical bootstrapping. The bootstrapping technique allows computation of the confidence intervals around average activity factors. The DS file has a parameter scenario (PS) worksheet with 27 scenarios that match the scenarios for the onshore production unit processes, but at this stage in the supply chain, the average U.S. is the only supply chain scenario that is modeled. After natural gas is gathered, the remaining supply chain stages model it as a commodity for which the energy requirements and emissions are the same for all sources of natural gas.

Table 2 shows the inputs and output for natural gas resource, natural gas fuel, diesel, and venting flows for Appalachian production scenario. Inputs comprise natural gas combustion emissions and diesel combustion emissions. The natural gas resource input does not link to an upstream unit process, but accounts for total natural gas consumed by the unit process plus the reference flow of the unit process (1 kg of natural gas produced). The input for natural gas combustion should be linked to an upstream unit process that accounts for combustion emissions, but not the quantity of natural gas actually combusted; the quantity of natural gas combusted is accounted for within the boundaries of this unit process. The input for diesel combustion should be linked to a unit process that accounts for both the cradle-to-gate emissions of diesel combusted and the emissions from diesel combustion. Vented natural gas (which is emitted from the reciprocating compressor crankcase, in contrast to gas that is vented through combustion exhaust) is an output that should be linked to NETL's "venting and flaring" unit process, which speciates the vented gas into hydrocarbons and other components. The reference flow of this unit process is 1 kg of transmitted natural gas.

Table 1: Input Parameters

Parameter	Expected Value	Low	High	Units	Description
4_RECIP_CH4	1.18E+02	9.69E+01	1.41E+02	tonnes	Methane emissions from transmission reciprocating compressors
4_NG_trans	1.24E+08	9.54E+07	1.59E+08	MCF	Annual natural gas processed at a transmission facility
nat_mCH4	7.34E-01	7.31E-01	7.38E-01	dimensionless	Mass fraction of CH4 in natural gas
4_RECIP_power	1.11E+04	9.79E+03	1.24E+04	hp	Operating reciprocating compressor horsepower at a transmission facility
4_RECIP_time	2.02E+03	1.82E+03	2.23E+03	hours	Operating reciprocating compressor hours at a transmission facility
Recip_thermalefficiency	4.40E-01	4.40E-01	4.40E-01	dimensionless	Thermal efficiency of reciprocating engines.

Table 2: Unit Process Input and Output Flows

Flow Name	Expected	Low	High	Units (Per Reference Flow)
Inputs				
Natural gas [Resource]	1.0011E+00	1.0011E+00	1.0010E+00	kg NG
Natural gas, combusted	1.01E-03	1.05E-03	9.76E-04	kg NG
Outputs				
Natural Gas [intermediate flow]	1.00	1.00	1.00	kg NG
Vent_NG [to venting and flaring]	6.76E-05	7.30E-05	6.30E-05	kg NG

* **Bold face** clarifies that the value shown *does not* include upstream environmental flows.

Note: Inventory items not included are assumed to be zero based on best engineering judgment or assumed to be zero because no data was available to categorize them for this unit process at the time of its creation.

Embedded Unit Processes

None.

References

EPA. 2016a. Greenhouse Gas Reporting Program. Environmental Protection Agency. <https://www.epa.gov/enviro/greenhouse-gas-customized-search>. Accessed August 22, 2018.

EPA. 2018. Inventory of U.S. Greenhouse Gas Emissions and Sinks, 1990-2016. Environmental Protection Agency. EPA 430-R-18-003. https://www.epa.gov/sites/production/files/2018-01/documents/2018_complete_report.pdf Accessed August 20, 2018

DrillingInfo. 2018. DI Data & Insights.

INGAA. 2010. Interstate Natural Gas Pipeline Efficiency.

Section III: Document Control Information

Date Created: January 11, 2019

Point of Contact: Timothy Skone (NETL), Timothy.Skone@NETL.DOE.GOV

Revision History:

Original/no revisions

How to Cite This Document: This document should be cited as:

NETL (2018). NETL Life Cycle Inventory Data – Unit Process: Transmission reciprocating compression. U.S. Department of Energy, National Energy Technology Laboratory. Last Updated: October 2018 (version 01). www.netl.doe.gov/LCA (<http://www.netl.doe.gov/LCA>)

Section IV: Disclaimer

Neither the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) nor any person acting on behalf of these organizations:

- A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe on privately owned rights; or
- B. Assumes any liability with this report as to its use, or damages resulting from the use of any information, apparatus, method, or process disclosed in this document.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by NETL. The views and opinions of the authors expressed herein do not necessarily state or reflect those of NETL.