



NETL Life Cycle Inventory Data

Process Documentation File

Process Name: Industrial Boiler, Natural Gas Fired, Over 100 Million BTU/hr
Reference Flow: 1 MJ of Thermal Energy from Natural Gas
Brief Description: This unit process models air emissions and heat produced by a large-scale natural gas fired boiler, producing over 100 million BTU/hr.

Section I: Meta Data

Geographical Coverage: United States **Region:** N/A
Year Data Best Represents: 2010
Process Type: Energy Conversion (EC)
Process Scope: Gate-to-Gate Process (GG)
Allocation Applied: No
Completeness: Individual Relevant Flows Captured

Flows Aggregated in Data Set:

Process Energy Use Energy P&D Material P&D

Relevant Output Flows Included in Data Set:

Releases to Air: Greenhouse Gases Criteria Air Pollutants Other
Releases to Water: Inorganic Emissions Organic Emissions Other
Water Usage: Water Consumption Water Demand (throughput)
Releases to Soil: Inorganic Releases Organic Releases Other

Adjustable Process Parameters:

BoilerEff *Efficiency of the natural gas boiler; default value is 80%, acceptable range is 75-92%*

NG_LHV *Lower heating value of natural gas; default value is 47.1 MJ/kg*

Tracked Input Flows:

Natural Gas [Intermediate Product] *Amount of natural gas used for the boiler, per the indicated reference flow*

Tracked Output Flows:

N/A



NETL Life Cycle Inventory Data

Process Documentation File

Section II: Process Description

Associated Documentation

This unit process is composed of this document and the data sheet (DS) *DS_Stage1,3_O_NaturalGasBoiler_Industrial_2010.02.xls*, which provides additional details regarding relevant calculations, data quality, and references.

Goal and Scope

The scope of this unit process includes natural gas consumption and fuel emissions associated with the use of a natural gas fired industrial boiler. The unit process models a generalized natural gas fired boiler emissions profile, where the boiler's efficiency is included as an adjustable parameter. The process is based on the reference flow of 1 megajoule (MJ) of thermal energy from natural gas, as described below and shown in **Figure 1**.

This unit process is considered to be applicable across the United States. However, the analyst should note that some states or regions, such as California, may require adherence to more stringent emissions criteria than those contained in this process. This is considered a data limitation. The emission factors used for this unit process are based on typical, mitigated emissions values for the state of Illinois, based on US and state emissions criteria. These values are typical of emissions criteria in most, but not all, US states.

This unit process is used under Life Cycle (LC) Stage #1 or #3, and may be applied for a variety of purposes where operation of a natural gas fired boiler is needed. These may include, but are not limited to, support services for mining, refining, and energy conversion facilities. Outputs from this process are not tracked, as reflected in **Figure 1**.

Boundary and Description

The rate of natural gas consumption included in this unit process is based on a default lower heating value (LHV) for natural gas of 47.1 MJ/kg. Thus, the production of 1 MJ of thermal energy from natural gas (i.e., the reference flow for this unit process) requires 0.0212 kg of natural gas. Natural gas LHV is included as an adjustable parameter, and can be modified as warranted, within the typical range for natural gas LHV

Air emissions for most constituents were calculated on a per MJ basis, based on an air emissions calculator provided by the State of Illinois Environmental Protection Agency (Illinois EPA 2010). Lead and mercury emissions were calculated separately, based on emissions factors provided by the US Environmental Protection Agency (US EPA 1998). The source for emissions data for these two constituents is over a decade old, however, these data represent the best available source that is applicable to this unit process. This is considered a data limitation.

Figure 1 provides an overview of the boundary of this unit process. As shown, emissions associated with the production and transport of natural gas are considered to be outside of the boundary for this unit process. Within the boundary of the unit process, energy use and air emissions are quantified, as discussed previously. Unlike most unit processes, this process does not include any tracked output flow. Therefore, the process does not directly feed into another portion of the model, although energy use and air emissions are incorporated into model results.

Table 1 summarizes the relevant properties and assumptions used to calculate natural gas use and air emissions. **Table 2** provides a summary of modeled input and output flows. Additional detail regarding input and output flows, including calculation methods, is contained in the associated DS.

Figure 1: Unit Process Scope and Boundary

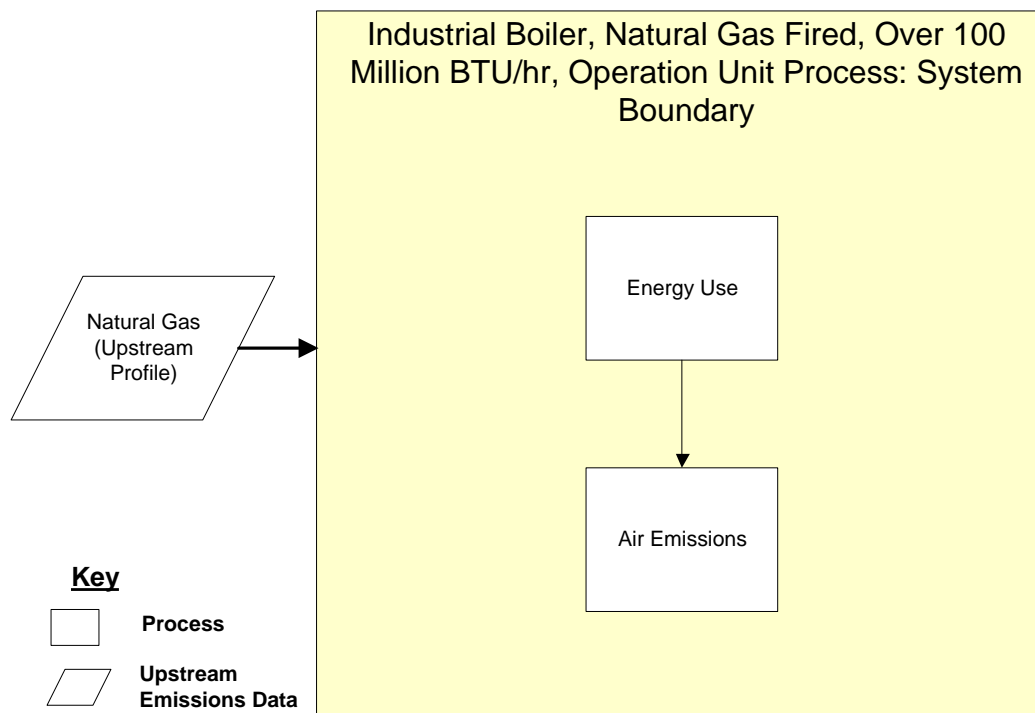


Table 1: Relevant Properties for Natural Gas Boiler Operation

Material Composition and Weights		
Material	Item	Reference
Natural Gas LHV (MJ/kg)	47.1	Study Value
Natural Gas required to produce 1 MJ of heat energy (L/MJ)	0.0212	NETL Engineering Calculation

Table 2: Unit Process Input and Output Flows

Flow Name	Value	Units (Per Reference Flow)
Inputs		
Natural Gas [Intermediate Product]	2.65E-02	kg/MJ
Outputs		
Thermal Energy from Natural Gas Fuel [Energy]	1.00E+00	MJ
Carbon dioxide [Inorganic emissions to air]	7.57E-05	kg/MJ
Methane [Organic emissions to air (group VOC)]	1.45E-09	kg/MJ
Nitrous oxide (laughing gas) [Inorganic emissions to air]	1.39E-09	kg/MJ
Nitrogen oxides [Inorganic emissions to air]	1.77E-07	kg/MJ
Sulphur dioxide [Inorganic emissions to air]	3.79E-10	Kg/MJ
Carbon monoxide [Inorganic emissions to air]	5.30E-08	kg/MJ
NM VOC (unspecified) [Group NM VOC to air]	3.47E-09	kg/MJ
Dust (unspecified) [Particles to air]	4.80E-09	kg/MJ
Lead (+II) [Heavy metals to air]	6.01E-12	kg/MJ
Mercury (+II) [Heavy metals to air]	3.13E-12	kg/MJ
Ammonia [Inorganic emissions to air]	2.02E-09	kg/MJ

* **Bold face** clarifies that the value shown *does not* include upstream environmental flows. Upstream environmental flows were added during the modeling process using GaBi modeling software, as shown in Figure 1.

Embedded Unit Processes

None.

References

Illinois EPA 2010

Illinois Environmental Protection Agency. (2010). *Calculate Emissions*.

http://www.epa.state.il.us/air/aer/calculate/boiler_ng.html (Accessed July 28, 2010)

US EPA 1998

United States Environmental Protection Agency. (1998). *Emissions Factors & AP 42, Compilation of Air Pollutant Emission Factors*.

<http://www.epa.gov/ttnchie1/ap42/ch01/final/c01s04.pdf>
(Accessed August 25, 2010)

Section III: Document Control Information

Date Created: November 4, 2010

Point of Contact: Timothy Skone (NETL),
Timothy.Skone@NETL.DOE.GOV

Revision History:

[25OCT2013] Corrected the NG_use calculation to use the boiler efficiency – all inputs and outputs scaled accordingly.

How to Cite This Document: This document should be cited as:

NETL (2010). *NETL Life Cycle Inventory Data – Unit Process: Industrial Boiler, Natural Gas Fired, Over 100 Million BTU/hr*. U.S. Department of Energy, National Energy Technology Laboratory. Last Updated: October 2013 (version 02).
www.netl.doe.gov/energy-analyses (<http://www.netl.doe.gov/energy-analyses>)

Section IV: Disclaimer

Neither the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) nor any person acting on behalf of these organizations:

- A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe on privately owned rights; or
- B. Assumes any liability with this report as to its use, or damages resulting from the use of any information, apparatus, method, or process disclosed in this document.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by NETL. The views and opinions of the authors expressed herein do not necessarily state or reflect those of NETL.