



NETL Life Cycle Inventory Data

Process Documentation File

Process Name: Natural Gas Well Construction and Installation (coal bed methane)

Reference Flow: 1 pcs/kg kg

Brief Description: Materials of construction and installation fuels and emissions for a natural gas well (coal bed methane).

Section I: Meta Data

Geographical Coverage: United States **Region:** N/A

Year Data Best Represents: 2012

Process Type: Installation Process (IP)

Process Scope: Gate-to-Gate (GG)

Allocation Applied: No

Completeness: Individual Relevant Flows Captured

Flows Aggregated in Data Set:

Process Energy Use Energy P&D Material P&D

Relevant Output Flows Included in Data Set:

Releases to Air: Greenhouse Gases Criteria Air Pollutants Other

Releases to Water: Inorganic Emissions Organic Emissions Other

Water Usage: Water Consumption Water Demand (throughput)

Releases to Soil: Inorganic Releases Organic Releases Other

Adjustable Process Parameters:

Drill_speed *Drilling rate (m/hr)*

Drill_depth *Depth of well (m)*

Product_rate *Production rate of well (kg/d)*

Life_well *Useful life of well (yr)*

Tracked Input Flows:

Steel, pipe welded *Steel pipe used for well casing; steel content of pipe is 85% recycled*

Concrete, ready mix *Concrete used for well casing*

Diesel *Diesel used as a fuel during well installation*



NETL Life Cycle Inventory Data

Process Documentation File

Tracked Output Flows:

Natural Gas Well Construction and Installation

Reference flow; expressed on the basis of fraction of well per kg of natural gas extraction (pcs/kg NG)

Section II: Process Description

Associated Documentation

This unit process is composed of this document and the data sheet (DS) *DS_Stage1_C_NG_Well_CBM_2010.01.xls*, which provides additional details regarding relevant calculations, data quality, and references.

Goal and Scope

The scope of this unit process encompasses the energy inputs and material outputs for the construction and installation of a natural gas well that extracts coal bed methane (CBM). The unit process is based on the reference flow of 1 pcs/kg NG, which represents the fraction of the well construction and installation burdens per kilogram of natural gas extraction. The relevant flows of this unit process are described below and shown in **Figure 1**.

The inputs to this unit process are steel pipe and concrete (which are used as casing materials for the well) and diesel (which is combusted in drilling equipment during well installation). The energy and material flows for the upstream production and delivery of steel, concrete, and diesel are not included in this unit process but are accounted for by other unit process. The output of this unit process is the fraction of the well materials and installation energy that is attributable to one kg of extracted natural gas. This unit process also accounts for environmental emissions that are directly released by the combustion of diesel during well installation. This unit process is an input to the natural gas assembly process, which is a modeling tool for tying together the operation and construction activities of the natural gas supply chain.

Boundary and Description


The installation of natural gas wells includes the drilling of the well, followed by the installation of a well casing that provides strength to the well bore and prevents contamination of the geological formations that surround the gas reservoir.

Vertical drilling is used for conventional wells, which recover natural gas from reservoirs with large pockets of oil or natural gas. Horizontal drilling is used for unconventional natural gas reserves where hydrocarbons are dispersed throughout a matrix of shale or coal. Horizontal drilling is often accompanied by hydrofracing (short for hydraulic fracturing). The installation of CBM wells requires horizontal drilling but does not require hydrofracing.

An advanced drilling rig has a drilling speed of 17.8 meters per hour (Natural Gas.org, 2004). A typical diesel engine used for oil and gas exploration has a power of 700 horsepower and a heat rate of 7,000 Btu/hp-hr (EPA, 1995). The diesel consumption per hour of drilling was calculated from the above horsepower and heat rate and was applied to AP-42 emission factors for diesel combustion in stationary industrial engines (EPA, 1995) in order to determine the emissions from the installation of a well.

A well is lined with a carbon steel casing that is held in place with concrete. A typical casing has an inner diameter of 8.6 inches, is 0.75 inches thick, and weighs 24 pounds per foot (Natural Gas.org, 2004). The weight of concrete used by the well walls is assumed to be equal to the weight of the steel casing. The total weight of materials for the construction of a well bore is estimated by factoring the total well length by the above linear weight of carbon steel and concrete.

Figure 1: Unit Process Scope and Boundary

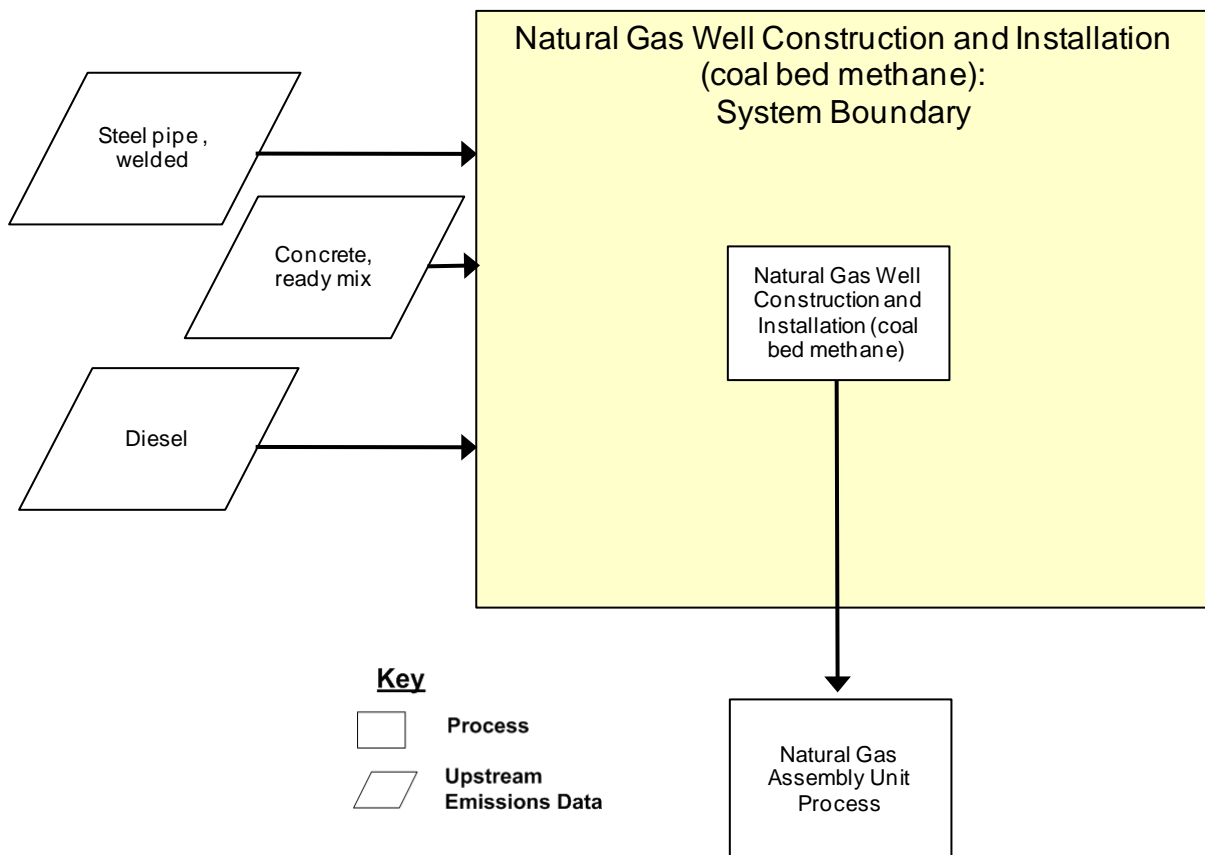

Key properties of the well construction and installation process are summarized in **Table 1**. The inputs and outputs of this unit process are summarized in **Table 2**.

Table 1: Properties of Natural Gas Well Construction and Installation (coal bed methane)

Property	Value	Source
Drilling direction	horizontal	Natural Gas.org 2004; Reum, D. et al. 2008
Drilling depth, m	15,000	Natural Gas.org 2004
*Well production rate, kg/day	15,200	EIA 2009; ALL Consulting 2004
*Well life, yr	25	Study assumption
Inner diameter, in	8.6	Natural Gas.org 2004
Steel casing thickness, in	0.75	Natural Gas.org 2004
Steel casing mass, kg/m	36	Natural Gas.org 2004

* Values for well production rate and life are used to apportion construction and installation requirements to one kilogram of natural gas extracted

Table 2: Unit Process Input and Output Flows

Flow Name*	Value	Units (Per Reference Flow)
Inputs		
Steel, pipe welded, BF (85% Recovery Rate) [Metals]	3.85E-03	kg
Concrete, ready mix, R-5-0 [Concrete_Cement]	3.85E-03	kg
Diesel [Crude oil products]	5.99E-04	kg
Outputs		
Natural Gas Well Construction and Installation	1.00	kg
Carbon dioxide [Inorganic emissions to air]	1.91E-03	kg
Methane [Organic emissions to air (group VOC)]	1.05E-07	kg
Nitrogen oxides [Inorganic emissions to air]	3.96E-05	kg
Sulphur oxides [Inorganic emissions to air]	6.68E-07	kg
Carbon monoxide [Inorganic emissions to air]	9.08E-06	kg
NM VOC (unspecified) [Group NM VOC to air]	1.06E-06	kg
Dust (PM10) [Particles to air]	1.16E-06	kg

* **Bold face** clarifies that the value shown *does not* include upstream environmental flows. Upstream environmental flows were added during the modeling process using GaBi modeling software, as shown in Figure 2.

Embedded Unit Processes

None.

References

- ALL Consulting (2004). Coal Bed Methane Primer: New Source of Natural Gas -- Environmental Implications.
- EIA. (2009) United States Total 2008: Distribution of Wells by Production Rate Bracket. Energy Information Administration. 2009.
- EPA (1995). Compilation of Air Pollutant Emission Factors, Volume I: Stationary Point and Area Sources, AP-42. US EPA Office of Air Quality Planning and Standards. Research Triangle Park, North Carolina. 1995. <http://www.epa.gov/ttnchie1/ap42> (Accessed May 18, 2010)
- Hayden, J., D. Pursell (2005). The Barnett Shale: Visitors Guide to the Hottest Gas Play in the US. Pickering Energy Partners. October 2005. <http://www.tudorpickering.com/pdfs/TheBarnettShaleReport.pdf> (Accessed June 14, 2010).
- Natural Gas.org (2004). Well Completion. http://naturalgas.org/naturalgas/well_completion.asp#liftingwell (Accessed July 1, 2010)
- Reum, D. et al. (2008) Four-blade bit helps reduce drilling time by as much as half. World Oil. September 2008.

Section III: Document Control Information

Date Created: October 20, 2010
Point of Contact: Timothy Skone (NETL), Timothy.Skone@NETL.DOE.GOV

Revision History:
Original/no revisions

How to Cite This Document: This document should be cited as:

NETL (2010). *NETL Life Cycle Inventory Data – Unit Process: Natural Gas Well Construction and Installation (coal bed methane)*. U.S. Department of Energy, National Energy Technology Laboratory. Last Updated: October 2010 (version 01). www.netl.doe.gov/energy-analyses (<http://www.netl.doe.gov/energy-analyses>)

Section IV: Disclaimer

Neither the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) nor any person acting on behalf of these organizations:

- A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe on privately owned rights; or
- B. Assumes any liability with this report as to its use, or damages resulting from the use of any information, apparatus, method, or process disclosed in this document.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by NETL. The views and opinions of the authors expressed herein do not necessarily state or reflect those of NETL.