



# NETL Life Cycle Inventory Data

## Process Documentation File

**Process Name:** Petroleum Well Construction and Installation (associated gas)  
**Reference Flow:** 1 pcs/kg NG  
**Brief Description:** Materials of construction and installation fuels and emissions for an oil well that produces associated natural gas (conventional onshore).

---

### Section I: Meta Data

---

**Geographical Coverage:** United States      **Region:** N/A  
**Year Data Best Represents:** 2012  
**Process Type:** Installation Process (IP)  
**Process Scope:** Gate-to-Gate (GG)  
**Allocation Applied:** No  
**Completeness:** Individual Relevant Flows Captured  
**Flows Aggregated in Data Set:**  
 Process       Energy Use       Energy P&D       Material P&D  
**Relevant Output Flows Included in Data Set:**  
Releases to Air:     Greenhouse Gases     Criteria Air Pollutants     Other  
Releases to Water:  Inorganic Emissions     Organic Emissions     Other  
Water Usage:       Water Consumption     Water Demand (throughput)  
Releases to Soil:     Inorganic Releases     Organic Releases     Other

### Adjustable Process Parameters:

Drill\_speed      *Drilling rate (m/hr)*  
Drill\_depth      *Depth of well (m)*  
Product\_rate      *Production rate of well (kg/d)*  
Life\_well      *Useful life of well (yr)*

### Tracked Input Flows:

Steel, pipe welded      *Steel pipe used for well casing; steel content of pipe is 85% recycled*  
Concrete, ready mix      *Concrete used for well casing*



---

# NETL Life Cycle Inventory Data

## Process Documentation File

---

Diesel

*Diesel used as a fuel during well installation*

### Tracked Output Flows:

Natural Gas Well Construction and Installation

*Reference flow; expressed on the basis of fraction of well per kg of natural gas extraction (pcs/kg NG)*

---

## Section II: Process Description

---

### Associated Documentation

This unit process is composed of this document and the data sheet (DS) *DS\_Stage1\_C\_NG\_Petroleum\_Well\_Conventional\_Onshore\_2010.01.xls*, which provides additional details regarding relevant calculations, data quality, and references.

### Goal and Scope

The scope of this unit process encompasses the energy inputs and material outputs for the construction and installation of a conventional, onshore well that co-extracts petroleum and natural gas. The unit process is based on the reference flow of 1 pcs/kg NG, which represents the fraction of the well construction and installation burdens per kilogram of natural gas extraction. The relevant flows of this unit process are described below and shown in **Figure 1**.

The inputs to this unit process are steel pipe and concrete (which are used as casing materials for the well) and diesel (which is combusted in drilling equipment during well installation). The energy and material flows for the upstream production and delivery of steel, concrete, and diesel are not included in this unit process but are accounted for by other unit process. The output of this unit process is the fraction of the well materials and installation energy that is attributable to one kg of extracted natural gas. This unit process also accounts for environmental emissions that are directly released by the combustion of diesel during well installation. This unit process is an input to the natural gas assembly process, which is a modeling tool for tying together the operation and construction activities of the natural gas supply chain.

### Boundary and Description

The installation of natural gas wells includes the drilling of the well, followed by the installation of a well casing that provides strength to the well bore and prevents contamination of the geological formations that surround the petroleum and gas reservoir.


Vertical drilling is used for conventional wells, which recover natural gas from reservoirs with large pockets of oil or natural gas. Horizontal drilling is used for unconventional natural gas reserves where hydrocarbons are dispersed throughout a matrix of shale or coal. Horizontal

drilling is often accompanied by hydrofracing (short for hydraulic fracturing). The installation of conventional onshore wells is done with vertical drilling and does not require hydrofracing.

An advanced drilling rig has a drilling speed of 17.8 meters per hour (Natural Gas.org, 2004). A typical diesel engine used for oil and gas exploration has a power of 700 horsepower and a heat rate of 7,000 Btu/hp-hr (EPA, 1995). The diesel consumption per hour of drilling was calculated from the above horsepower and heat rate and was applied to AP-42 emission factors for diesel combustion in stationary industrial engines (EPA, 1995) in order to determine the emissions from the installation of a well.

A well is lined with a carbon steel casing that is held in place with concrete. A typical casing has an inner diameter of 8.6 inches, is 0.75 inches thick, and weighs 24 pounds per foot (Natural Gas.org, 2004). The weight of concrete used by the well walls is assumed to be equal to the weight of the steel casing. The total weight of materials for the construction of a well bore is estimated by factoring the total well length by the above linear weight of carbon steel and concrete.

**Figure 1: Unit Process Scope and Boundary**

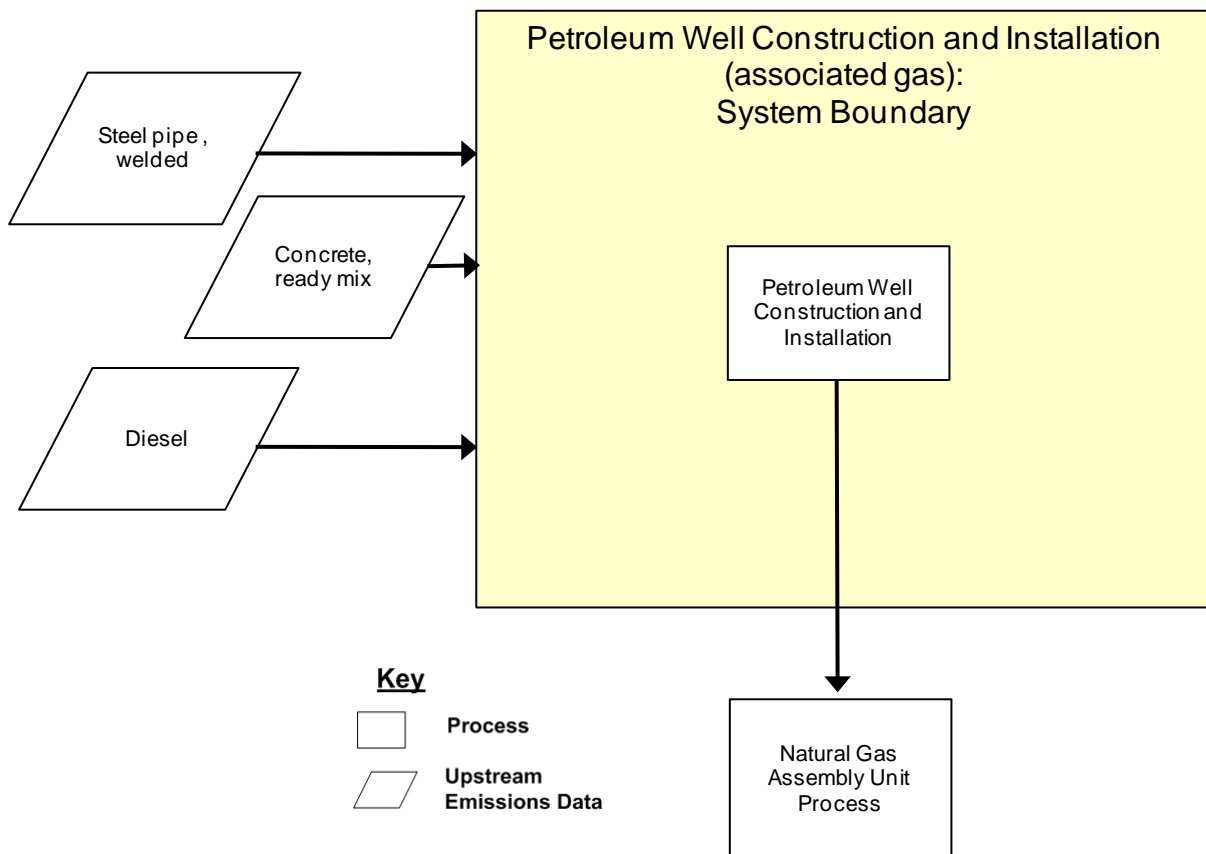

Key properties of the well construction and installation process are summarized in **Table 1**. The inputs and outputs of this unit process are summarized in **Table 2**.

**Table 1: Properties of Natural Gas Well Construction and Installation (associated gas)**

Property	Value	Source
Drilling direction	vertical	Natural Gas.org 2004; Reum, D. et al. (2008)
Drilling depth, m	1,500	Reum, D. et al. (2008)
*Well production rate, kg/day	9,400	EIA 2009
*Well life, yr	25	Study assumption
Inner diameter, in	8.6	Natural Gas.org 2004
Steel casing thickness, in	0.75	Natural Gas.org 2004
Steel casing mass, kg/m	36	Natural Gas.org 2004

\* Values for well production rate and life are used to apportion construction and installation requirements to one kilogram of natural gas extracted

**Table 2: Unit Process Input and Output Flows**

Flow Name*	Value	Units (Per Reference Flow)
<b>Inputs</b>		
Steel, pipe welded, BF (85% Recovery Rate) [Metals]	6.25E-04	kg
Concrete, ready mix, R-5-0 [Concrete_Cement]	6.25E-04	kg
Diesel [Crude oil products]	9.71E-05	kg
<b>Outputs</b>		
Natural Gas Well Construction and Installation	1.00	kg
Carbon dioxide [Inorganic emissions to air]	3.11E-04	kg
Methane [Organic emissions to air (group VOC)]	1.70E-08	kg
Nitrogen oxides [Inorganic emissions to air]	6.43E-06	kg
Sulphur oxides [Inorganic emissions to air]	1.08E-07	kg
Carbon monoxide [Inorganic emissions to air]	1.47E-06	kg
NM VOC (unspecified) [Group NM VOC to air]	1.72E-07	kg
Dust (PM10) [Particles to air]	1.87E-07	kg

\* **Bold face** clarifies that the value shown *does not* include upstream environmental flows. Upstream environmental flows were added during the modeling process using GaBi modeling software, as shown in Figure 2.

**Embedded Unit Processes**

None.

**References**

- EIA. (2009) United States Total 2008: Distribution of Wells by Production Rate Bracket. Energy Information Administration. 2009.
- EPA (1995). Compilation of Air Pollutant Emission Factors, Volume I: Stationary Point and Area Sources, AP-42. US EPA Office of Air Quality Planning and Standards. Research Triangle Park, North Carolina. 1995. <http://www.epa.gov/ttnchie1/ap42> (Accessed May 18, 2010)
- Natural Gas.org (2004). Well Completion. [http://naturalgas.org/naturalgas/well\\_completion.asp#liftingwell](http://naturalgas.org/naturalgas/well_completion.asp#liftingwell) (Accessed July 1, 2010)
- Reum, D. et al. (2008) Four-blade bit helps reduce drilling time by as much as half. World Oil. September 2008.

---

**Section III: Document Control Information**

---

**Date Created:** October 20, 2010

**Point of Contact:** Timothy Skone (NETL), [Timothy.Skone@NETL.DOE.GOV](mailto:Timothy.Skone@NETL.DOE.GOV)

**Revision History:**

Original/no revisions

**How to Cite This Document:** This document should be cited as:

NETL (2010). *NETL Life Cycle Inventory Data – Unit Process: Petroleum Well Construction and Installation (associated gas)*. U.S. Department of Energy, National Energy Technology Laboratory. Last Updated: October 2010 (version 01). [www.netl.doe.gov/energy-analyses](http://www.netl.doe.gov/energy-analyses) (<http://www.netl.doe.gov/energy-analyses>)

---

**Section IV: Disclaimer**

---

Neither the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL) nor any person acting on behalf of these organizations:

- A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this

- document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe on privately owned rights; or
- B. Assumes any liability with this report as to its use, or damages resulting from the use of any information, apparatus, method, or process disclosed in this document.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by NETL. The views and opinions of the authors expressed herein do not necessarily state or reflect those of NETL.