

TECHBRIEF

FIBER OPTIC-BASED PH SENSING IN AQUEOUS SUBSURFACE ENVIRONMENTS

OPPORTUNITY:

Research is active on the patent pending technology titled, “Plasmonic-Based pH Sensors in Aqueous Environments.” This invention is available for licensing and/or further collaborative research from the U.S. Department of Energy’s National Energy Technology Laboratory.

OVERVIEW:

Monitoring of chemical composition in subsurface environments is critically important for a range of fossil energy-related applications including unconventional, deep and ultra-deepwater oil and gas resources, as well as the monitoring of carbon dioxide (CO₂) migration during geological storage. Subsurface environments pose an extreme challenge for the development and deployment of sensing technologies due to the combination of high temperature and pressure, the presence of chemically corrosive chemical species, and potential high salinity. The temperatures and pressures present in subsurface environments are beyond the limits of most electrical and electronic components used in sensor applications, which often fail due to the instabilities associated with packaging, wires, and interconnects. For this reason, approaches that replace the need for electrical components and connections at the sensing location can also eliminate a common mode of failure for conventional sensor devices.

Optical-based sensing methodologies eliminate this concern and can be advantageous from a safety perspective in regards to the presence of potentially flammable gas and chemical species. In particular, sensors that employ fiber-Bragg gratings inscribed into specialty optical fibers, capable of withstanding extreme temperature and pressure conditions, have already been deployed commercially for distributed pressure and temperature sensing. In contrast, optical fiber-based sensors for subsurface chemical sensing applications have not yet been commercially deployed due, in part, to the lack of optical sensor elements with useful, reversible, and rapid responses to particular chemical species of interest.

This invention describes the development and use of fiber optic-based sensing layers composed of metal nanoparticles incorporated into a silica matrix coated on an optical fiber. The new sensing materials have been shown to exhibit strong and reversible optical response to pH variation at high temperatures and pressures under saline conditions. Deployment of sensors using this technology will allow for embedded, real-time, remote pH sensing capabilities in extreme subsurface environments.

(continued)





FOR MORE INFORMATION:

Customer Service:
1.800.553.7681

626 Cochran's Mill Road
P.O. Box 10940
Pittsburgh, PA 15236-0940
412.386.4687

3610 Collins Ferry Road
P.O. Box 880
Morgantown, WV 26507-0880
304.285.4764


1450 Queen Avenue SW
Albany, OR 97321-2198
541.967.5892

SIGNIFICANCE:

- High stability of noble metal nanoparticles and conducting metal oxide nanoparticles allows for pH determination in high temperature and corrosive environments.
- Limited hysteresis and rapid response time for pH sensing due to mitigation of the need for a chemical reaction of an organic dye or polymer matrix.
- Ability to tune particle size, composition, shape, and many other factors in order to optimize the response to pH.
- Compatibility with integration to waveguide-based sensors such as silica-based optical fibers.
- Compatibility with remote, passive, and distributed sensing methodologies.
- Superior response times as compared to electrode based pH sensors which require significant time to reach equilibration.
- A broader range of pH sensing capability as compared to organic indicator dyes in which multiple types of dyes must be combined to achieve pH sensing capabilities over a broad pH range.
- Potential for multi-parameter monitoring in addition to pH (temperature, pressure, other Chemical species) through broadband wavelength interrogation approaches.

APPLICATIONS:

- Determination of pH in aqueous downhole conditions relevant for unconventional resource recovery.
- Determination of pH in aqueous geological formations for CO₂ storage monitoring.
- Measurement of pH in industrial chemical processes.
- Measurement of pH in nuclear power generation applications.
- Replacement of standard electrode-based pH meters due to the broad pH range, rapid response time, and low hysteresis of response.

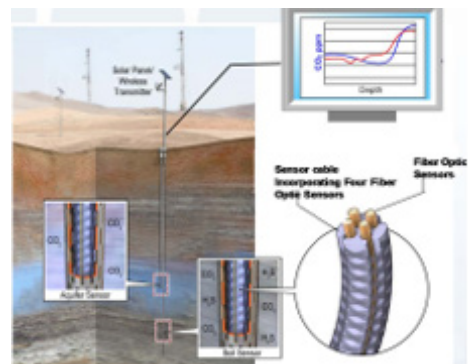

RELATED PATENTS:

U.S. Patent Pending (non-provisional patent application)

Filed: 04/24/2015

Title: Plasmonic Nanoparticle Based pH Sensors in Aqueous Environments

Inventors: Paul Ohodnicki, Barbara Kutchko, Congjun Wang, Thomas Brown

NETL Reference No: 14N-19

U.S. Patent No: 10,274,431

Issued: 04/30/2019

Title: Method of Evaluating pH Using an Inorganic-oxide Nanoparticle-based Optical pH Sensor

Inventors: Paul Ohodnicki, Christopher Matranga Congjun Wang, Douglas Kauffman, Xin Su

NETL Reference No: 15N-02